

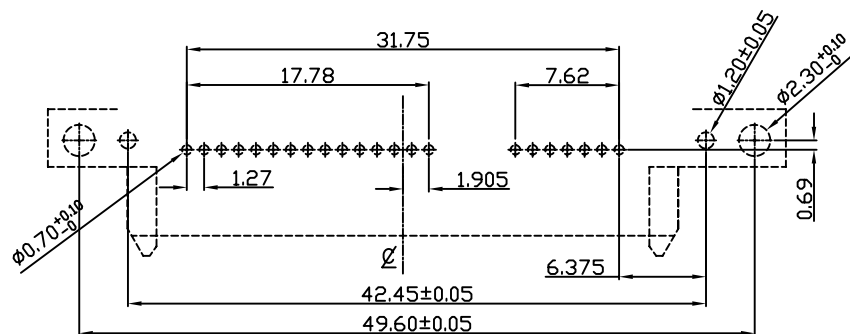
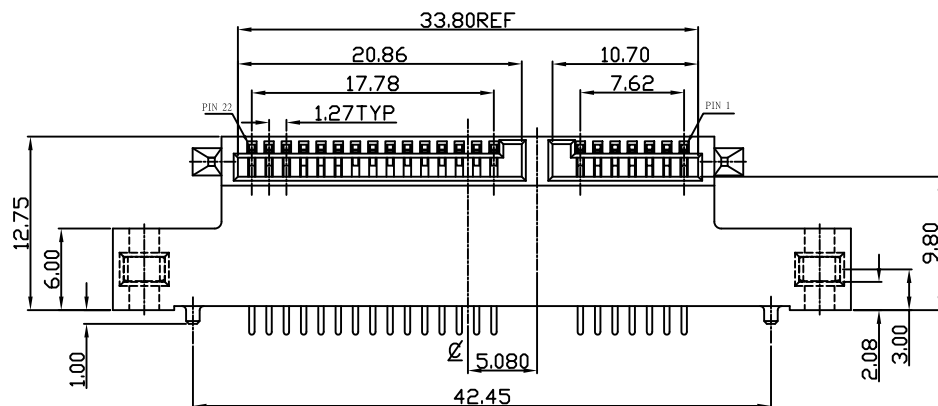
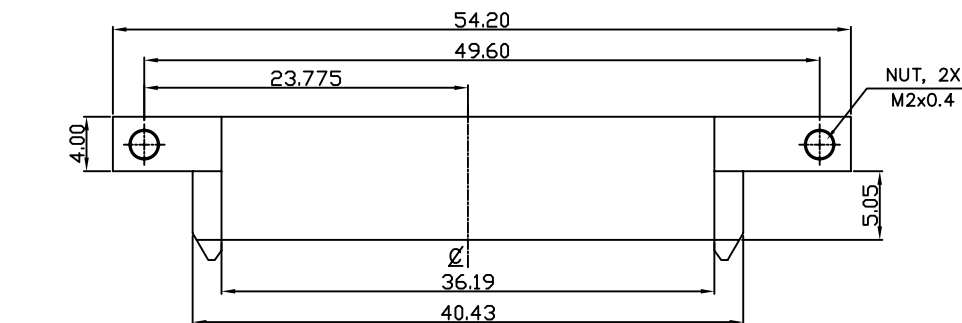


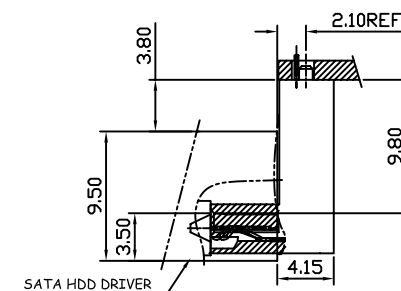


RECOMMEND P.C.B. LAYOUT (component side)
DEFAULT TOLERANCES:±0.05; PCB THICKNESS : 1.4MM

- NOTES:
1. MATERIAL :
INSULATOR : LCP , 30% GLASS FILLED , UL 94 V-0
RATED OR OTHER EQUIVALENT HIGH
TEMP RESINS .
CONTACT : PHOSPHOR BRONZE,JIS C5210 R-EH,
T=0.25±0.01mm.
 2. FINISH :
CONTACTS : GOLD PLATING IN THE CONTACT AREA
AND SELECT PLATING IN THE SOLDER TAIL AREA,
WITH 50u"(min.)NICKEL UNDERPLATING OVERALL.



禁用環境管理物質如下.....等:

- | | |
|-----------------|------------|
| a. 鎳及鎳化合物, | h. 石棉, |
| b. 鉛及鉛化合物, | i. 偶氮化合物, |
| c. 汞及汞化合物, | j. 甲醛, |
| d. 六價鉻化合物, | k. 聚乙烯混合物, |
| e. 多溴聯苯, 多溴聯苯醚, | l. 臭氧危害物質, |
| f. 有機氯化物, | m. 放射性物質。 |
| g. 有機錫化合物, | |



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SATA-SRA127M2P-7+15-LF

SERIES LEADFREE

22 WAY

POST M2X0.4

FEMALE HIGH 12.75mm

DIP 90° UPPER CONTACT

DESCRIPTION: SATA HDD RECEPTACLE H=10.90 REV.