
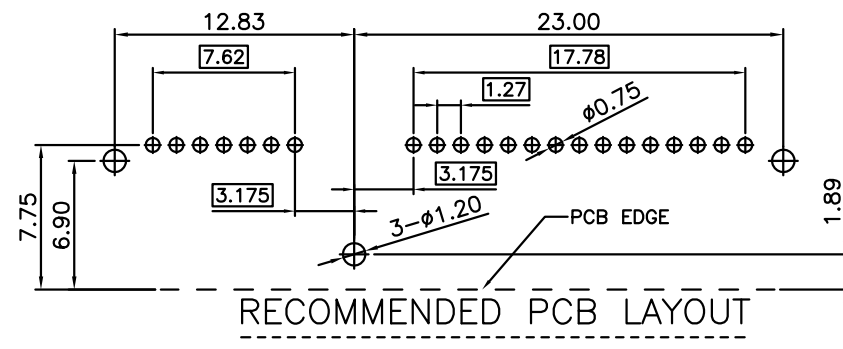

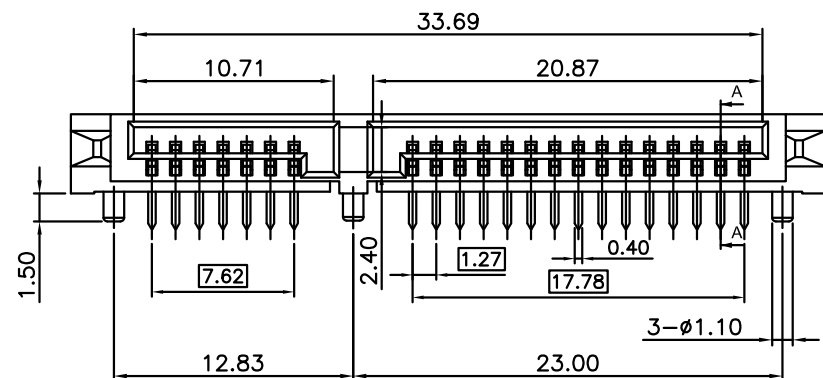
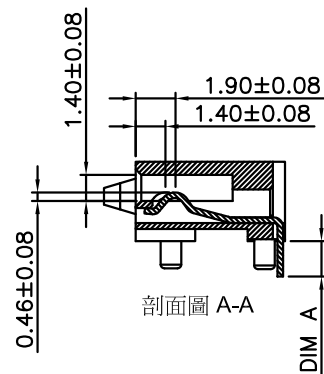


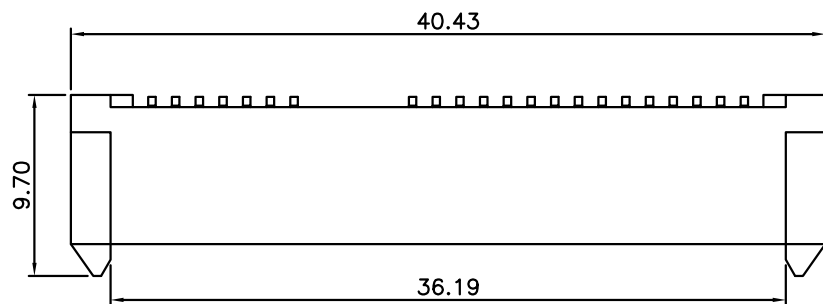

TABLE

SATA-SRB4225P-7+15	15 U" GOLD	LCP BLACK	GP	2.50
SATA-SRB4219P-7+15	15 U" GOLD	LCP BLACK	GP	1.90
PART NO.	PLATED	PLASTIC&COLOR	NOTE	DIM A

NOTE:

1.MATERIAL :

BASE : HIGH TEMPERATURE THERMOPLASTIC

UL94V-0,

TERMINAL:COPPER ALLOY,THICKNESS = 0.30 mm

2,PLATING:

CONTACT:GOLD OVER 50u" MIN NICKEL

UNDERPLATE

SOLDER TAIL:150u"MIN MISTY TIN 50u" MIN

NICKEL

UNDERPLATE

GOLD SPECIFICATION:SEE TABLE

3.ELECTRONICAL SPECIFICATION:

CURRENT RATING: 1.5 AMPERE PER CONTACT

CONTACT RESISTANCE: 30 MILLIOHMS MAX.

INSULATION RESISTANCE: 1000 MEGOHMS MIN.

DIELECTRIC WITHSTANDING VOLTAGE: 500 VDC.

OPERATING TEMPERATURE: -40°C~+85°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

SATA-SRB042xxP-7+15-LF

SERIES LEADFREE

22 WAY

POST

19:DIP 1.9mm

25:DIP 2.5mm

HIGH 4.25mm

FEMALE

DIP 90°

BOTTOM CONTACT

DESCRIPTION: SATA 22P SOCKET 無墊高DIP三柱型