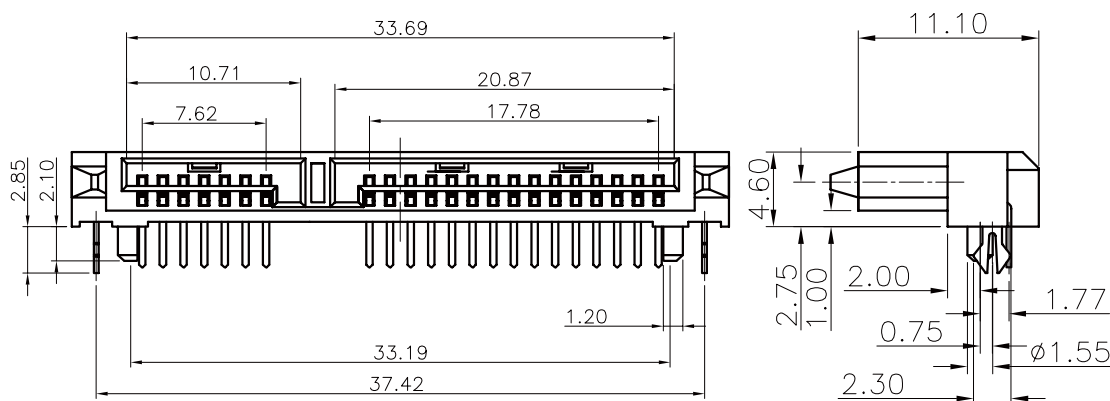
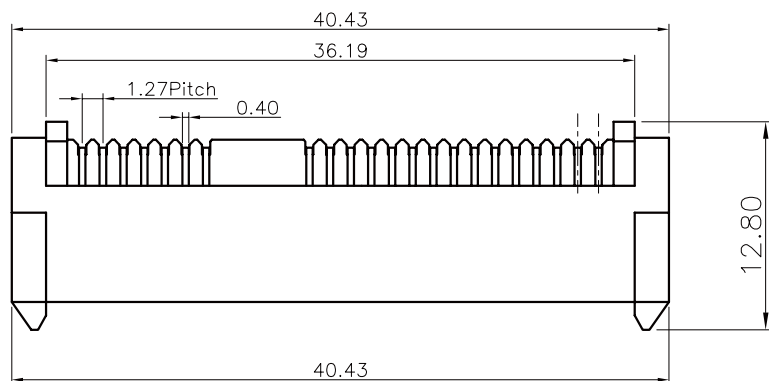


RECOMMENDED PCB LAYOUT

NOTE:

- 1.MATERIAL :
 BASE : HIGH TEMPERATURE THERMOPLASTIC
 UL94V-0, COLOR : BLACK
 TERMINAL: COPPER ALLOY,THICKNESS = 0.30 mm
 FORKLOCK: COPPER ALLOY,THICKNESS = 0.30 mm
- 2,PLATING:
 CONTACT:GOLD OVER 50u" MIN NICKEL UNDERPLATE
 SOLDER TAIL:150u"MIN MISTY TIN 50u" MIN NICKEL UNDERPLATE
 GOLD SPECIFICATION:a,Flash; b, 15u"; c,30u";
- 3.ELECTRONICAL SPECIFICATION:
 CURRENT RATING: 1.5 AMPERE PER CONTACT
 CONTACT RESISTANCE: 30 MILLIOHMS MAX.
 INSULATION RESISTANCE: 1000 MEGOHMS MIN.
 DIELECTRIC WITHSTANDING VOLTAGE: 500 VDC.
 OPERATING TEMPERATURE: -40°C~+85°C
- 4.MEETS THE REQUIREMENTS OF DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL OF 27 JANUARY 2003 ON THE RESTRICTION OF THE USE OF CERTAIN HAZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC EQUIPMENT(ROHS)

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SATA-SRB046PZ07-7+15-LF

SERIES LEADFREE
7+15 PIN
FEMALE POST+CLIP 0.76mm
HIGH 4.6mm
BOTTOM CONTACT
DIP 90°

DESCRIPTION: ASSEMBLY OF SATA 22P SOCKET SLIM TYPE R/A DIP BOTTOM