
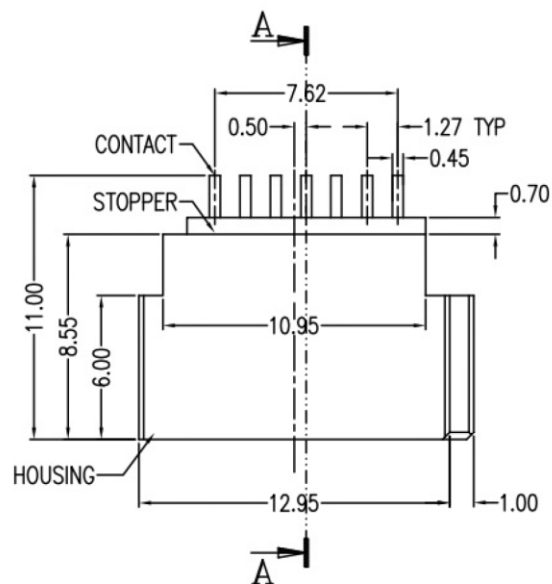
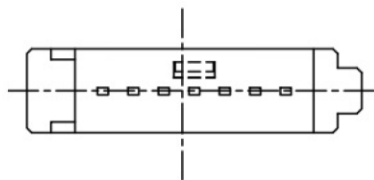
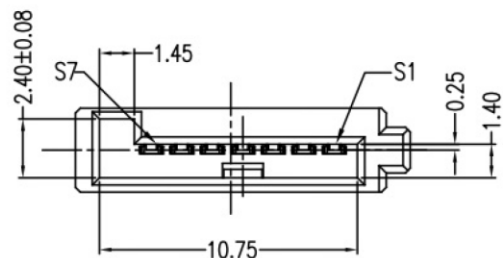


Pin	SIGNAL NAME
S1	GND
S2	A+
S3	A-
S4	GND
S5	B-
S6	B+
S7	GND

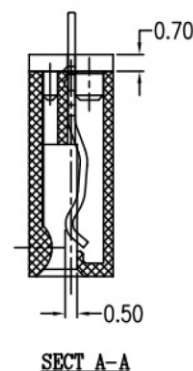

NOTES

*Material

Housing: LCP, UL 94V-0 Rated; Color: Black.
 Stopper: LCP, UL 94V-0 Rated.
 Contact: Phosphor Bronze
 Plating: Au Plating On Contact Area;
 Sn(100u" Min.) Plating On Solder Tail;
 Ni(50u" Min.) Underplating Overall

*Mechanical

Insertion Force: 45N Max.
 Withdrawal Force: 10N Min.
 Durability: 500 Cycles.

*Electrical Specification

Operation Voltage: 100V AC Max.
 Current Rating: 1.5 Ampere Per Contact.
 Contact Resistance: 30mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding Voltage: 500V AC

*Environmental

Operating Temperature: -55°C to +55°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.35
 .XX ± 0.25
 .XXX ± 0.15
 ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

SATA-SS9218-07-LF
 SERIES | | | | LEADFREE
 | | | | 07 WAY
 | | | | PIN 1.8mm
 | | | | HIGH 9.2mm
 | | | | SOLDER
 | | | | FEMALE

DESCRIPTION: