

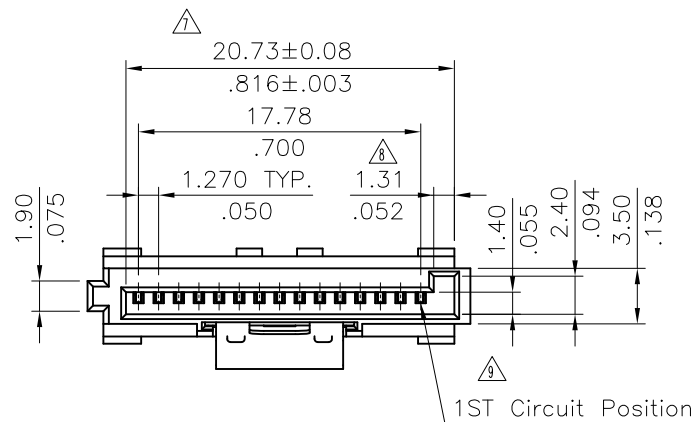


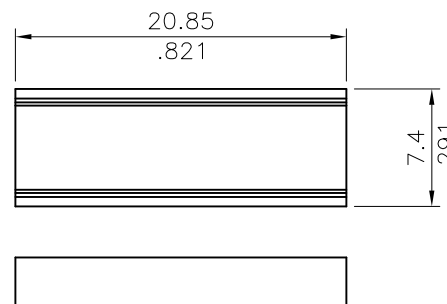


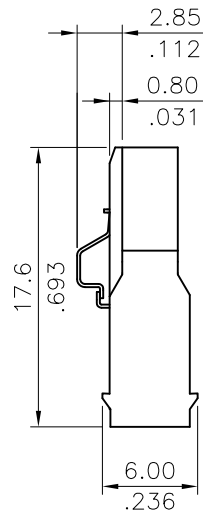

Material:

- * Insulation: PBT+30%GF. UL 94V-0, Color Black
- * Contact: Phosphor Bronze
- * Latch: Stainless Steel

P/N	DIM.A	Accept wire gage
SATA-STL18y-15	0.75	AWG #18
SATA-STL20y-15	0.60	AWG #20~#22

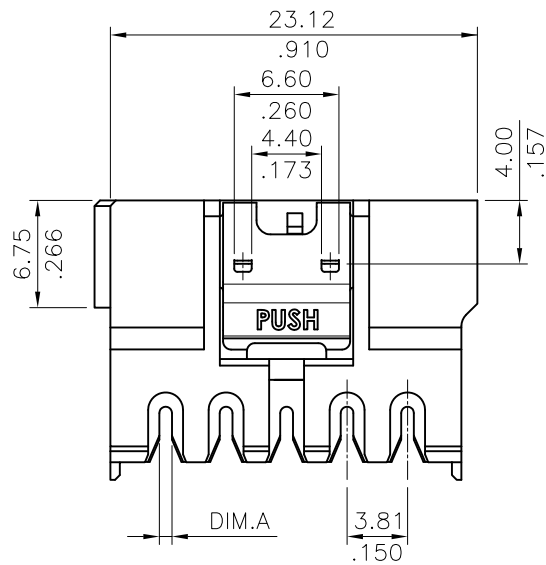

C TYPE
(Through Cover)

L TYPE
(One End Cover)

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

ORDER INFORMATION

SATA-STLxx-15-LF
SERIES
FEMALE
IDT
LOCK
LEADFREE
15 WAY
C:THROUGH COVER
L:ONE END COVER
18:18 AWG
20:20~22 AWG

DESCRIPTION: SERIAL ATA POWER IDC TYPE RECEPTACLE CONN.