
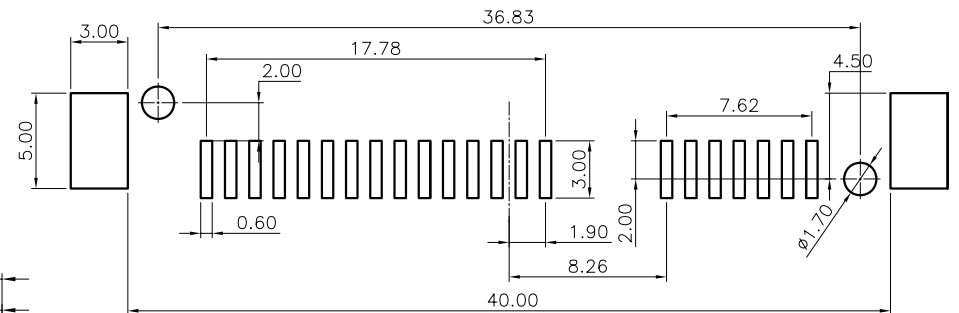
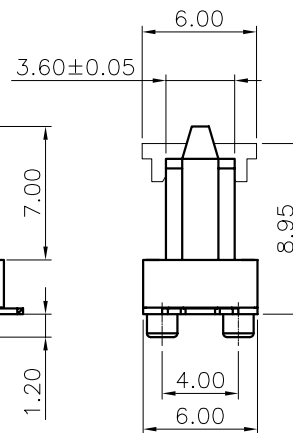
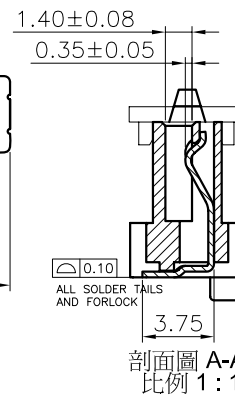
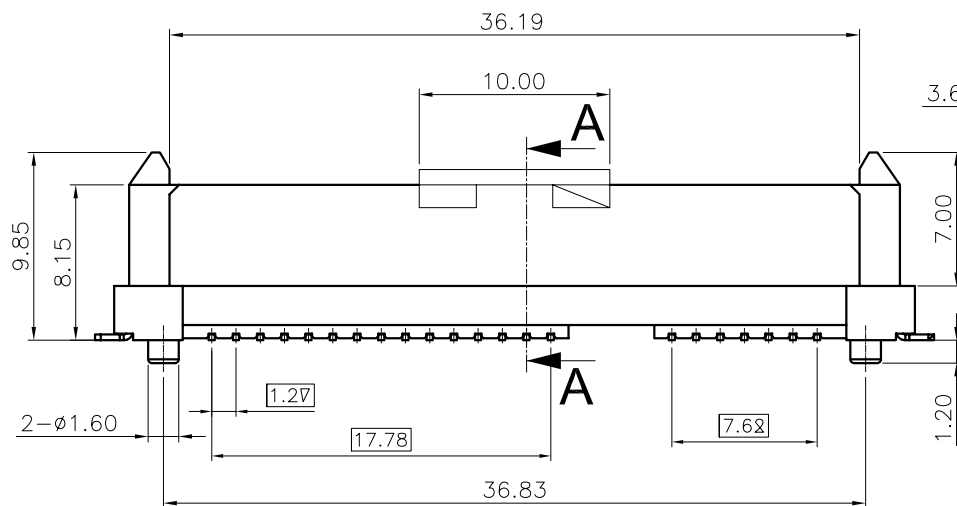


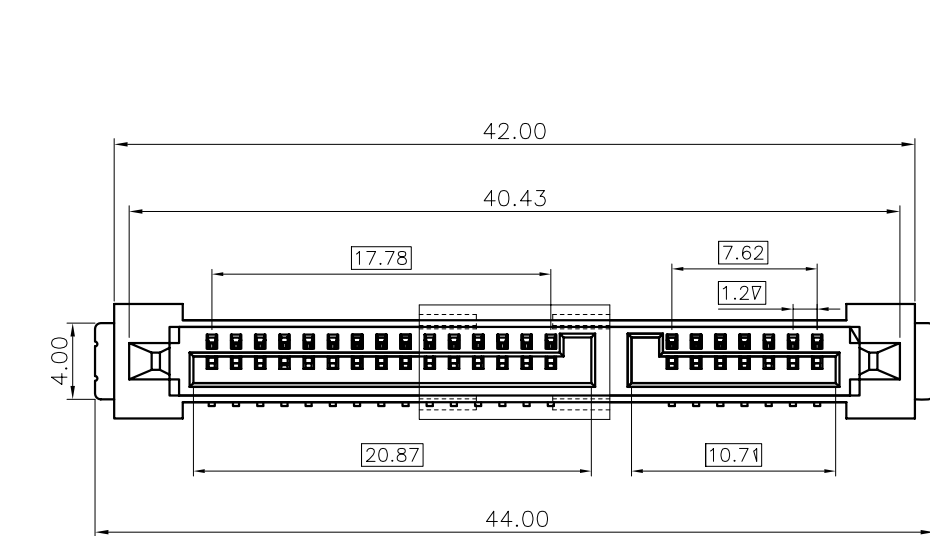

RECOMMENDED PCB LAYOUT

NOTE:

1.MATERIAL :

BASE : HIGH TEMPERATURE THERMOPLASTIC UL94V-0,
COVER : HIGH TEMPERATURE THERMOPLASTIC UL94V-0,
TERMINAL: COPPER ALLOY, THICKNESS = 0.30 mm
FORKLOCK: BRASS THICKNESS = 0.30 mm

2.PLATING:

CONTACT: GOLD OVER 50u" MIN NICKEL UNDERPLATE
SOLDER TAIL: 150u" MIN MISTY TIN 50u" MIN NICKEL
UNDERPLATE
GOLD SPECIFICATION: SEE TABLE

3.ELECTRONICAL SPECIFICATION:

CURRENT RATING: 1.5 AMPERE PER CONTACT
CONTACT RESISTANCE: 30 MILLIOHMS MAX.
INSULATION RESISTANCE: 1000 MEGOHMS MIN.
DIELECTRIC WITHSTANDING VOLTAGE: 500 VDC.
OPERATING TEMPERATURE: -40°C ~ +85°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION


照片框

ORDER INFORMATION

SATA-SV08EP2CR-7+15-LF

SERIES FEMALE 180°SMT REEL CAP POST EAR HIGH 8.15mm
7+15 WAY LEADFREE

DESCRIPTION: NEW SATA 22P SOCKET 180度SMT 錫腳長3.75

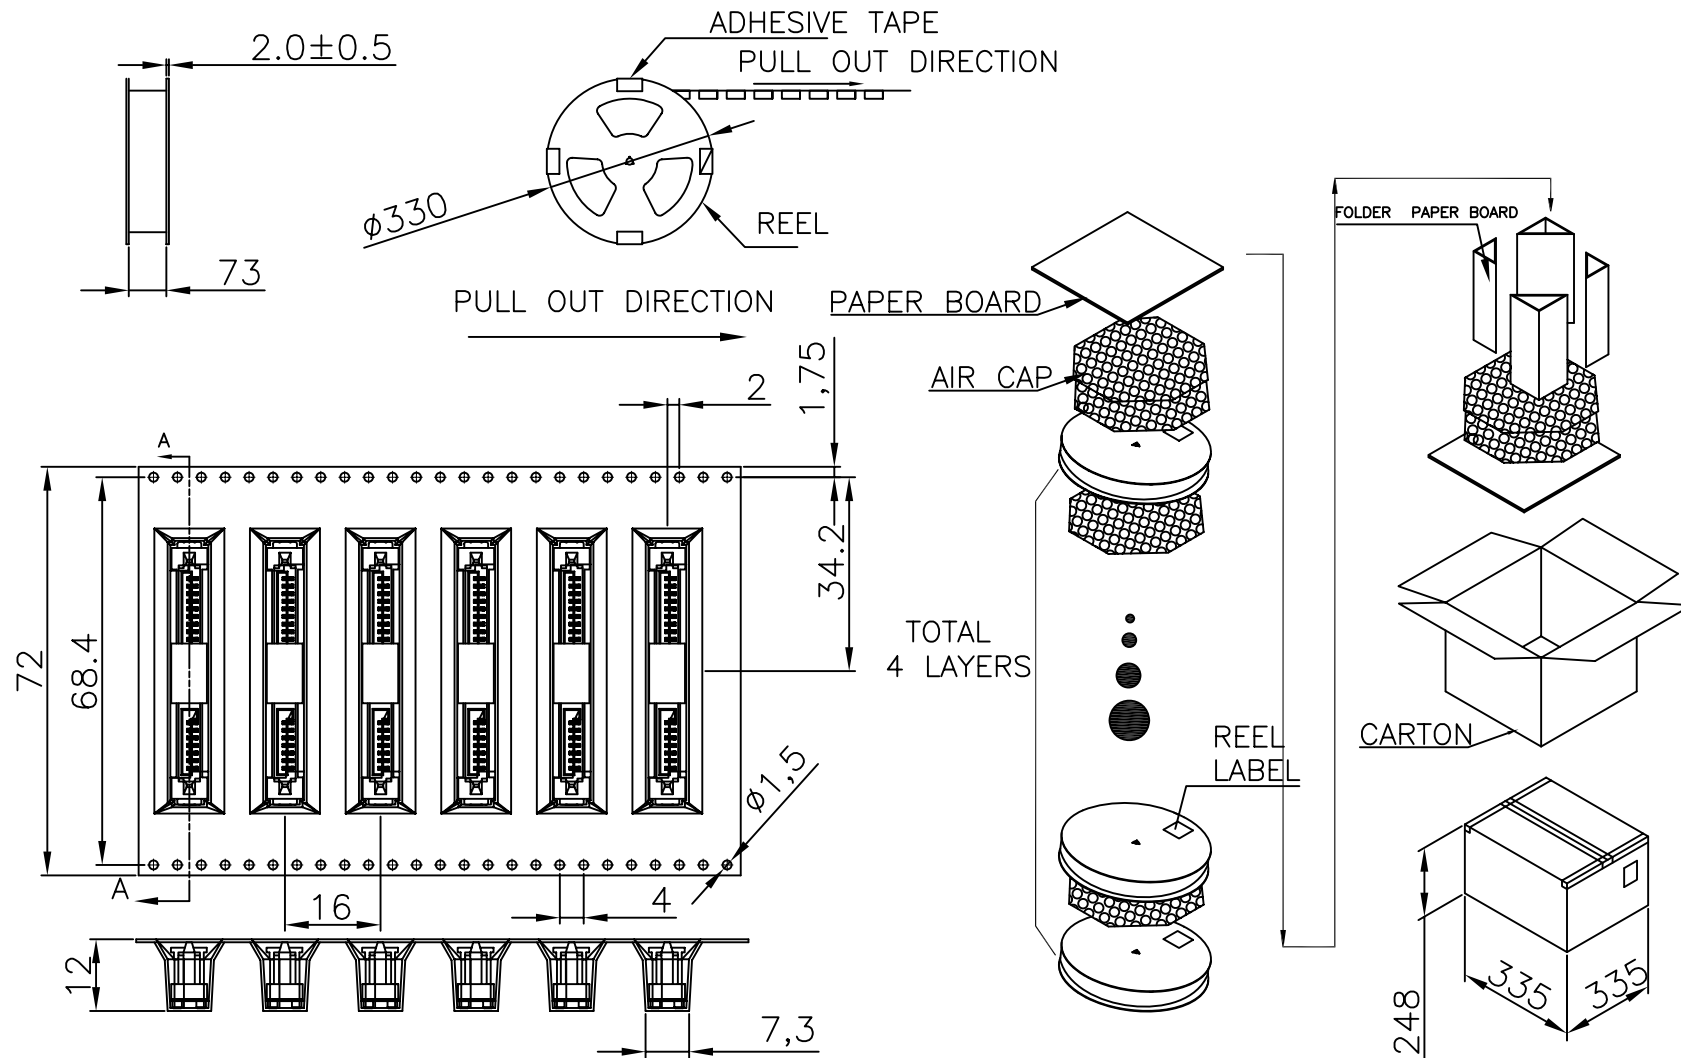

NOTES:

- 1.PRIMARY PACKING: 350PCS UNITS/REEL;
- 2.SECONDARY PACKING:4REELS/CARTON(1400PCS/CARTON);
- 3.NET WEIGHT:1.7g/PCS,1.32kg/REEL,8.56kg/CARTON;

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SATA-SV08EP2CR-7+15-LF

SERIES
FEMALE
180°SMT
REEL
CAP
POST
EAR
HIGH 8.15mm
LEADFREE
7+15 WAY

DESCRIPTION: NEW SATA 22P SOCKET 180度SMT 錫腳長3.75