

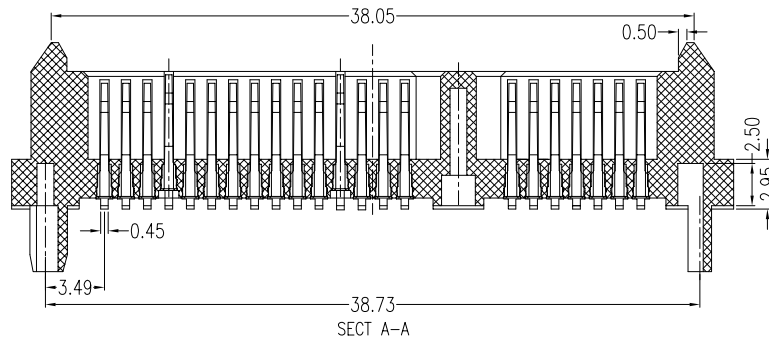
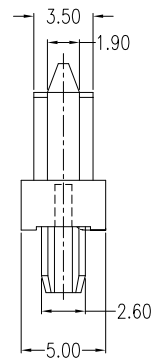
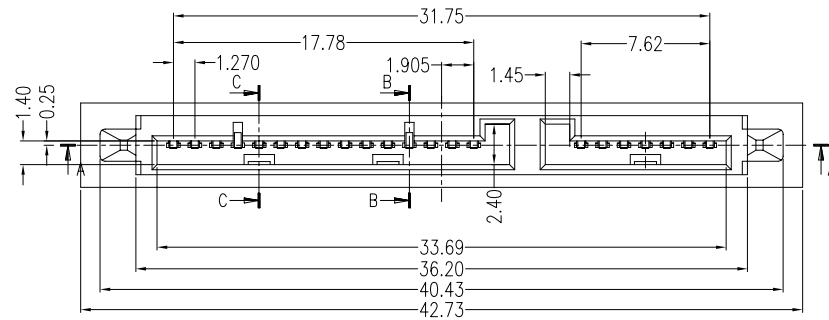


SECT C-C

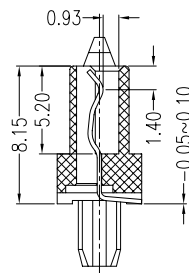

SECT B-B

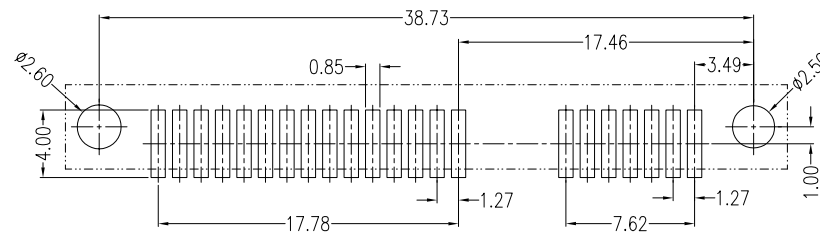

NOTES:

*Material

Housing: LCP, UL 94V-0 rated; Color: Black.

Contact: Phosphor Bronze

Plating: Gold Plating over Nickel on contact area;
Tin plating on Solder Tail.

*Electrical Specification

Operation Voltage: 100 VAC max.

Current Rating: 1.5 Ampere per contact

Contact Resistance: 30 Milliohms max.

Insulation Resistance: 1000 Megohms min.

Dielectric Withstanding Voltage: 500 VAC

*Environmental

Operating Temperature: -55°C to +125°C

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

SATA-SV08P1-7+15-LF

SERIES POST HIGH 8.15mm
180°SMT
FEMALE
LEADFREE
7+15 WAY

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

DESCRIPTION: SATA 7+15P Reverse SMT Type (High 9.85mm)Plastic Post Distance 38.73mm Female