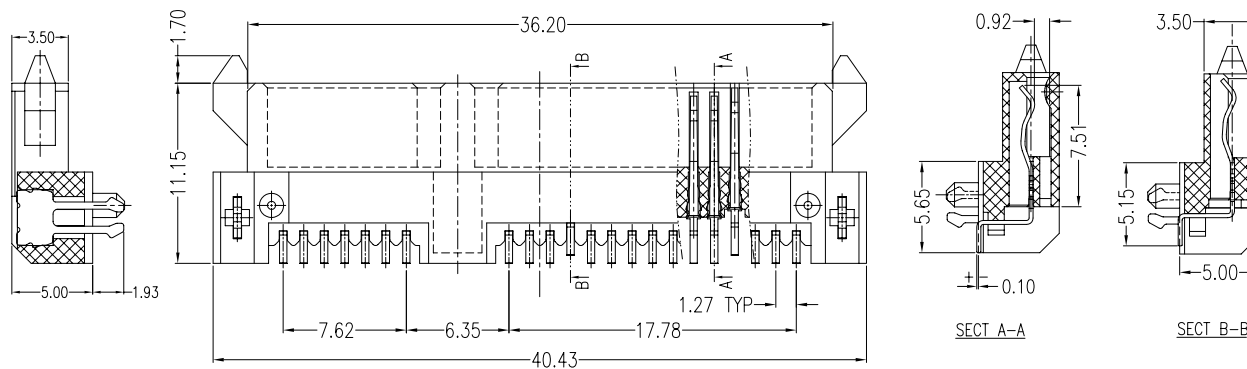
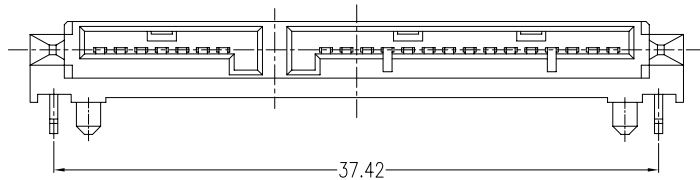


P.C.B. LAYOUT (T=1.2)

Notes:

*Material

Housing: LCP, UL 94V-0 rated; Color: Black.
Contact: Phosphor Bronze
Plating: Gold Plating over Nickel on contact area;
Tin plating on Solder Tail.

*Mechanical

Insertion Force: 45N max.
Withdrawal Force: 10N min.
Durability: 500 cycles

*Electrical Specification

Operation Voltage: 100 VAC max.
Current Rating: 1.5 Ampere per contact
Contact Resistance: 30 Milliohms max.
Insulation Resistance: 1000 Megohms min.
Dielectric Withstanding Voltage: 500 VAC

*Environmental

Operating Temperature: -55°C to +125°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SATA-SWB050PZ-7+15-LF

SERIES FEMALE 90°SMT
CLIP POST
7+15 PIN
LEADFREE
HIGH 5.0mm
BOTTOM CONTACT

DESCRIPTION: Serial ATA 7+15Pin Under Board SMT Female (Tail 5.0mm)