
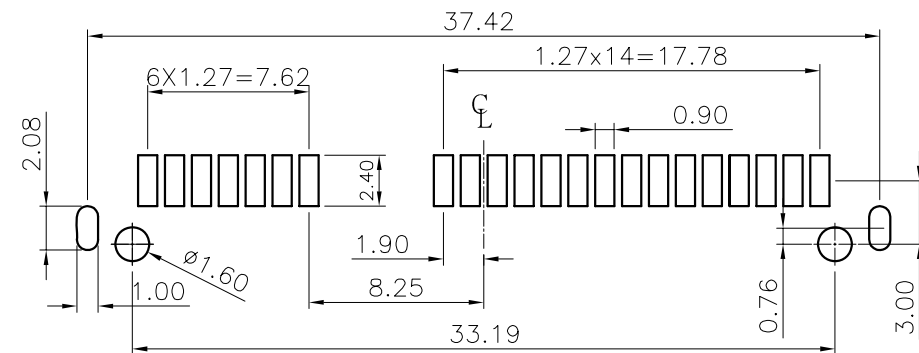
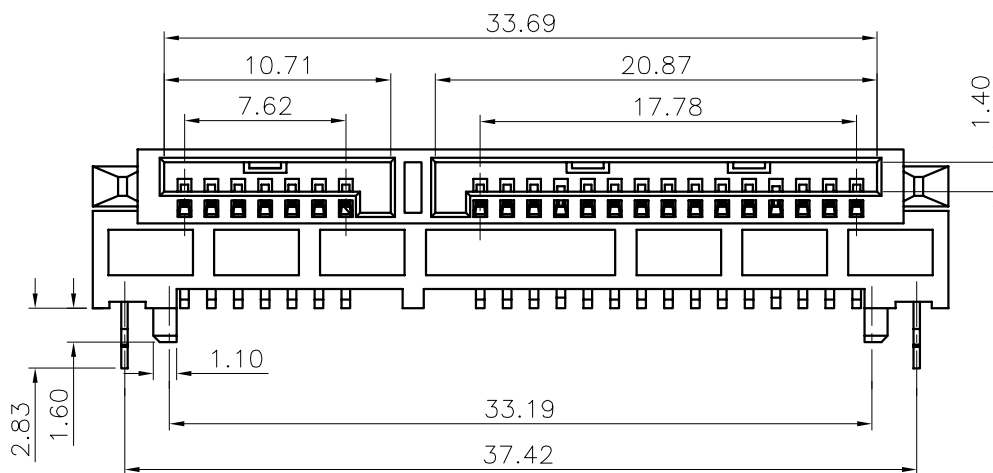


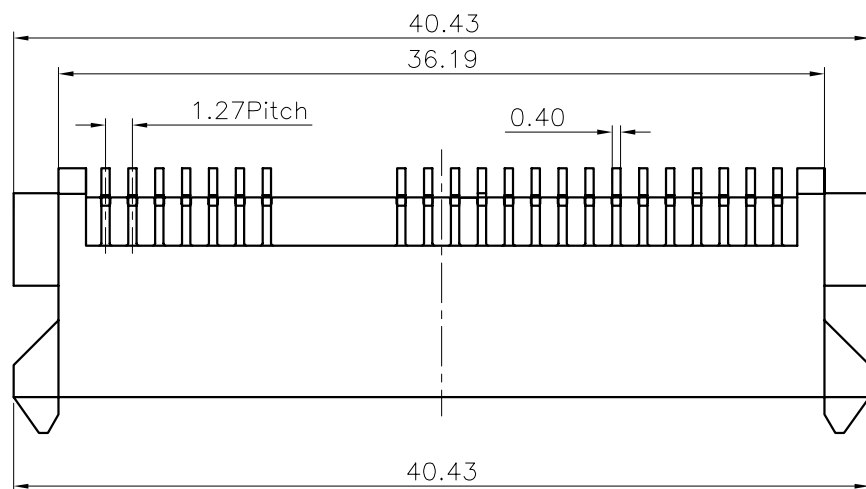

RECOMMENDED PCB LAYOUT

TABLE

SATA-SWB75PZ-7+15	GOLD FLASH	LCP BLACK	GP
PART NO.	PLATED	PLASTIC&COLOR	NOTE

NOTE:

1.MATERIAL :


BASE : HIGH TEMPERATURE THERMOPLASTIC UL94V-0,
TERMINAL: COPPER ALLOY, THICKNESS = 0.30 mm
FOR KLOCK: COPPER ALLOY, THICKNESS = 0.30 mm

2.PLATING:

CONTACT: GOLD OVER 50u" MIN NICKEL UNDERPLATE
SOLDER TAIL: 150u" MIN MISTY TIN 50u" MIN NICKEL
UNDERPLATE
GOLD SPECIFICATION: SEE TABLE

3.ELECTRONICAL SPECIFICATION:

CURRENT RATING: 1.5 AMPERE PER CONTACT
CONTACT RESISTANCE: 30 MILLIOHMS MAX.
INSULATION RESISTANCE: 1000 MEGOHMS MIN.
DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC.
OPERATING TEMPERATURE: -20°C~+85°C

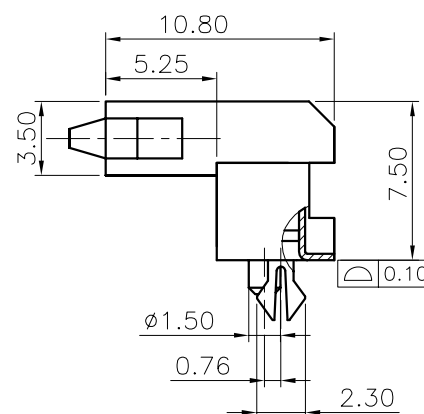

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ± 0.30

.XX ± 0.25

.XXX ±

ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

SATA-SWB075PZ-7+15-LF

SERIES

FEMALE

POST/CLIP

HIGH 7.50mm

90°SMT

LEADFREE

7+15 PIN

BOTTOM CONTACT

DESCRIPTION: SATA 22P SOCKET 下彈點 SMT (7.50mm)