


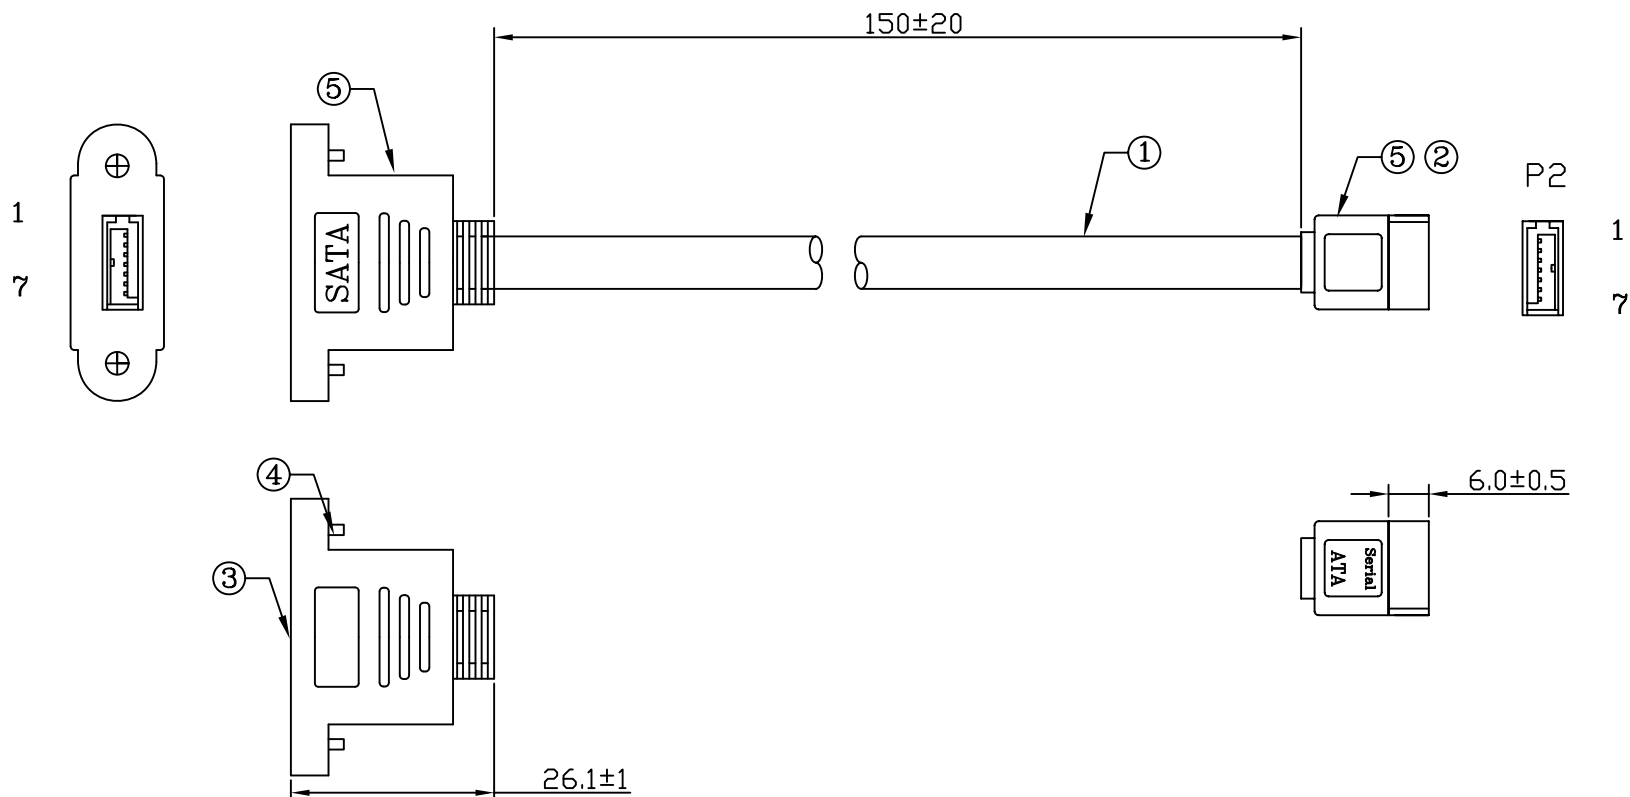

PIN ASSIGNMENT

P1	WIRE	P2
1	—●—	1
2	—●—	2
3	—●—	3
4	—●—	4
5	—●—	5
6	—●—	6
7	—●—	7

5	45P PVC OD:2.2mm, BLACK	1	PCS
4	SCREW #4-40 L=7.8mm ,NICKEL	1	PCS
3	SATA I/O 7P CONNECTOR, BLACK	1	PCS
2	SERIAL ATA FEMALE MO. LOCK 7P CONNECTOR: CRIMP TYPE INSULATOR: BLACK CONTACT GOLD FLASH CRIMPING	1	PCS
1	UL2725 26AWG*2P+28AWG*4C+AL/MY, JACKET PVC OD:2.2*7.8±0.15mm	1	PCS
NO.	DESCRIPTION	Q'TY	UNIT

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SATAX2-07072628PE-A15C-LF

SERIES

LEADFREE
15C:150mm
FEMALE TO MALE

PANEL

26,28AWG
07 TO 07 PIN

DESCRIPTION: SATA 7P/M TO 7P/F CABLE