
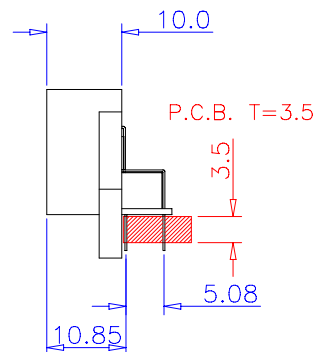


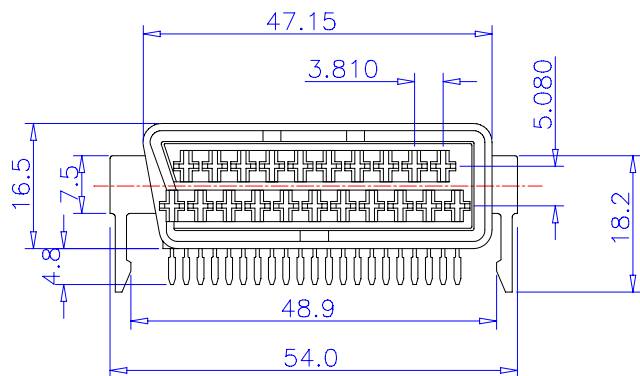

MATERIALS

INSULATOR:PC

CONTACT:Brass.

ENVIRONMENTAL

OPERATING TEMPERATURE:-55°C 105°C


ELECTRICAL

CONTACT WITHSTANDING:1AMP


DIELECTRIC WITHSTANDING:AC1000V/min.R.M.S.

INSULATION RESISTANCE:1000MΩmin.at 500V DC.

CONTACT RESISTANCE:50mΩmax.

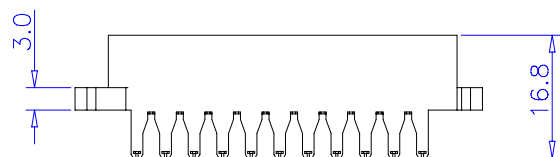

P. C. B. Layout

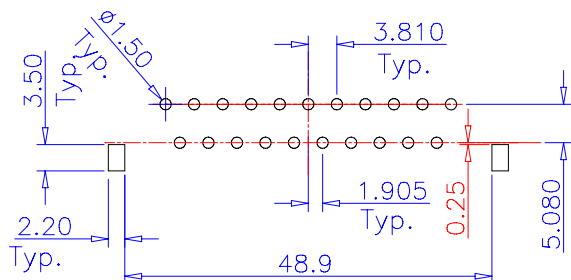

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±


.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION



ORDER INFORMATION

SC-SRL-21-LF
SERIES | LOCK | 21 WAY | LEADFREE
DIP 90°
FEMALE

DESCRIPTION: