

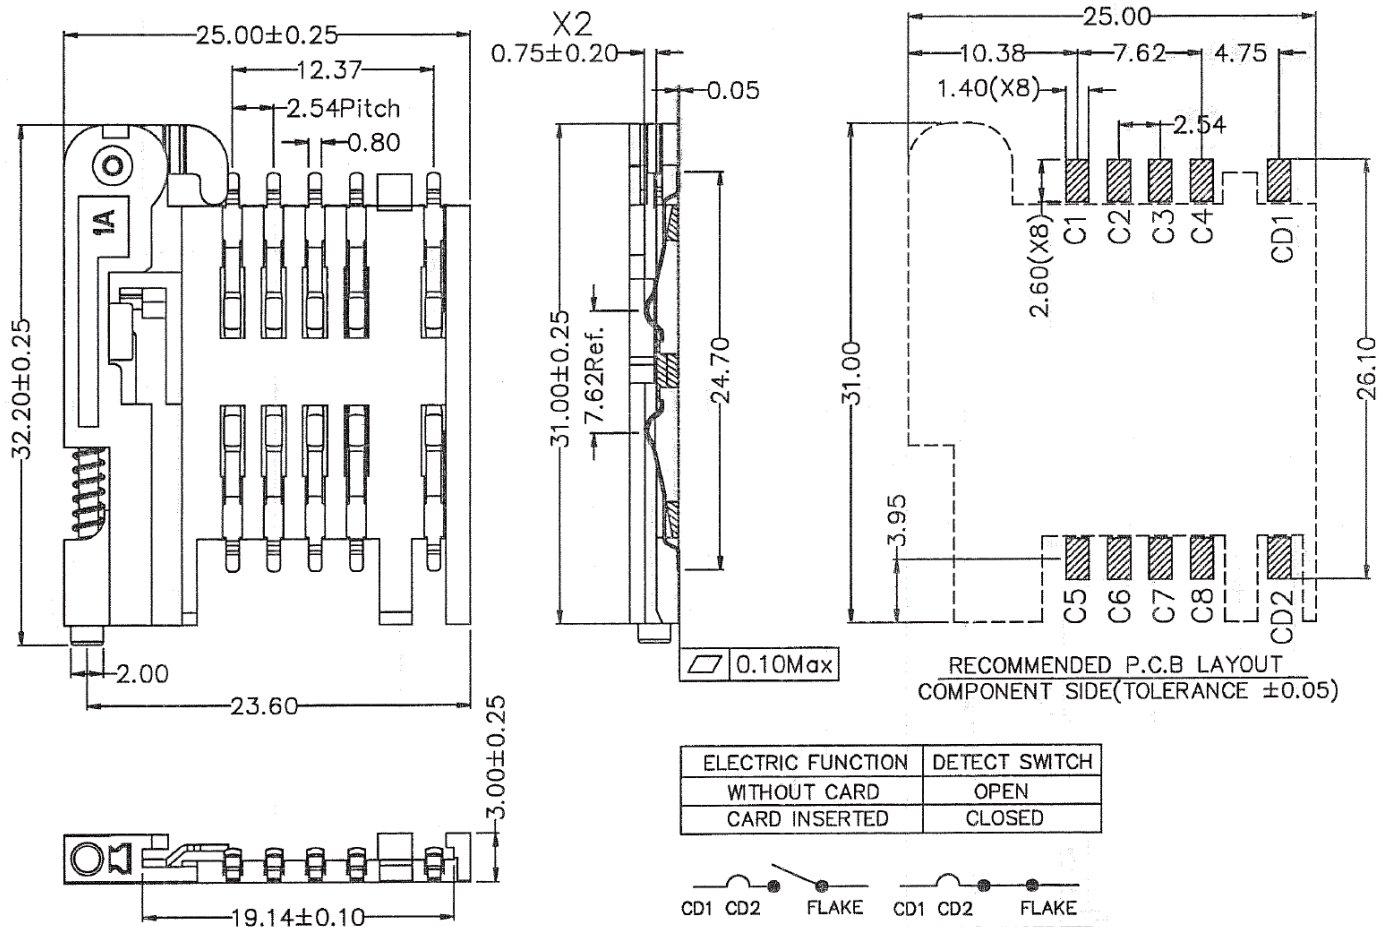


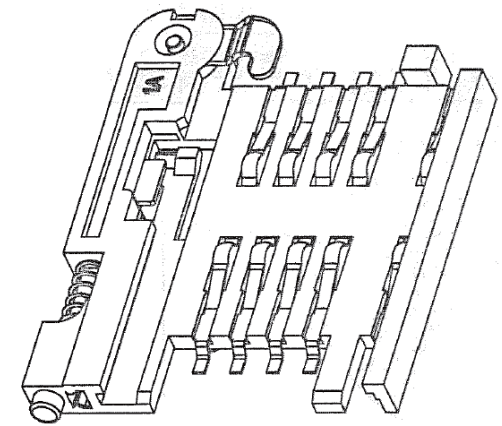

RECOMMENDED P.C.B LAYOUT
COMPONENT SIDE(TOLERANCE ±0.05)

ELECTRIC FUNCTION	DETECT SWITCH
WITHOUT CARD	OPEN
CARD INSERTED	CLOSED

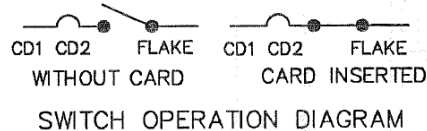

TECHNICAL CHARACTERISTICS

1.General Characteristics

Dimensions: 32.20LX25.00WX3.00H mm

Weight: Approx1.60±0.20g

Durability: 5,000 cycles min.

2.Electrical Characteristics

Contact resistance: 50mΩ typical, 100mΩ max

Insulation resistance: >1000MΩ/500V DC

3.Solderability

Vapor phase: 215°C, 30sec.Max

IR reflow: 250°C, 5sec.Max

Manual soldering: 370°C, 3sec.Max

4.Environmental Characteristics

Operating temperature: -40°C~+85°C

Operating humidity: 10%~+95%RH

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION


X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

SCE-W2231-08-LF
SERIES LEADFREE
08 WAY
LONG 31.0mm
PAD TO PAD 22.30mm
90°SMT

DESCRIPTION:

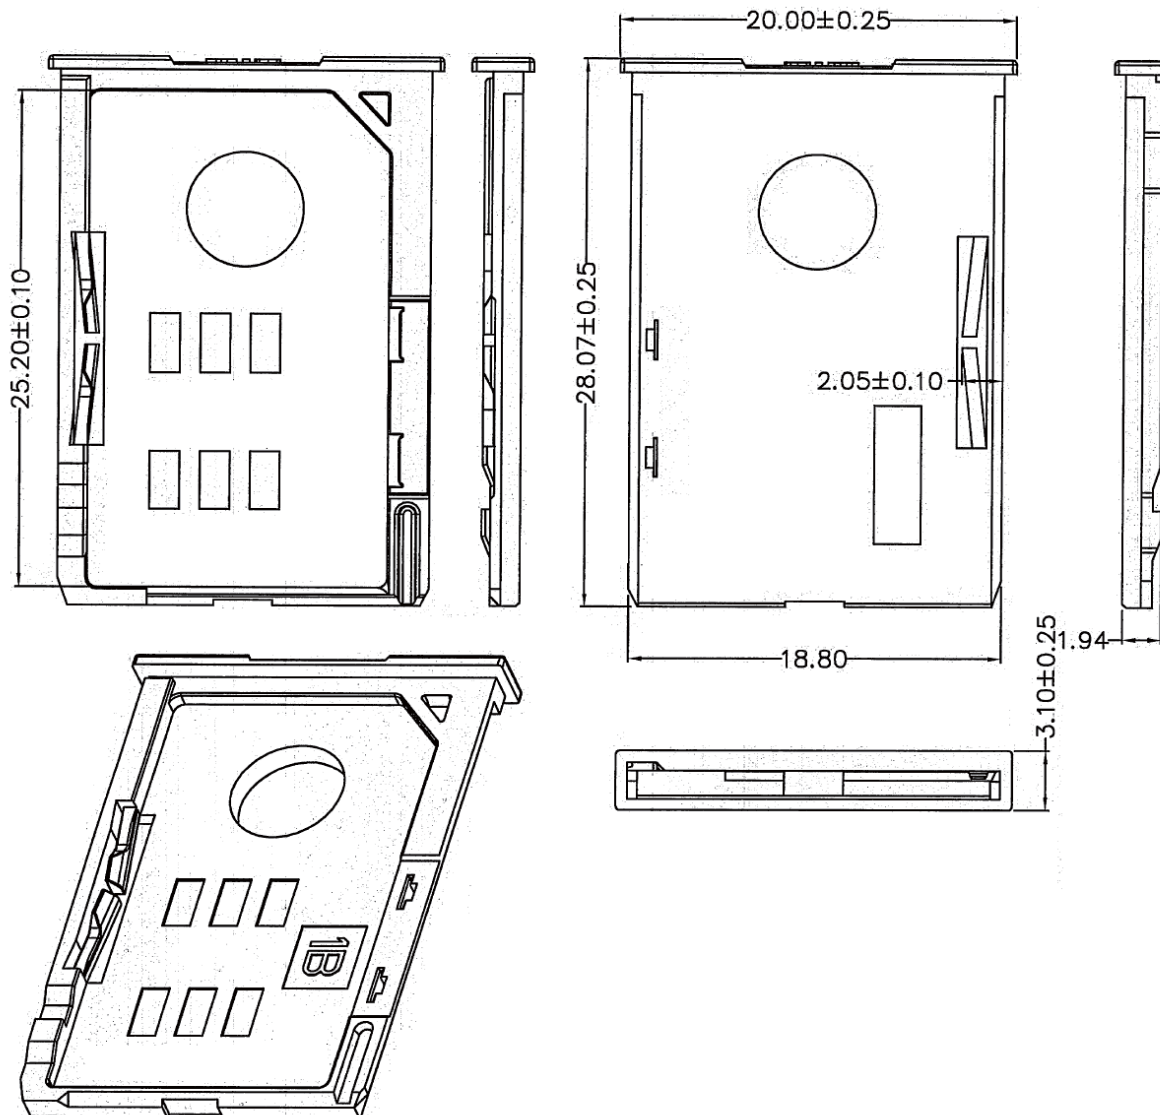

TECHNICAL CHARACTERISTICS

1.General Characteristics

Dimensions:28.07Lx20.00Wx3.10H mm

Weight:Approx 0.66±0.20g

2.Electrical Characteristics

contact resistance:50mΩ typical,100mΩ max

insulation resistance:>1000MΩ/500V DC

3.Environmental Characteristics

Operating temperature:-40°C~+85°C

Operating humidity :10%~+95%RH

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SCE-W2231-08-LF
SERIES 08 WAY LEADFREE
LONG 31.0mm
PAD TO PAD 22.30mm
90°SMT

DESCRIPTION: