


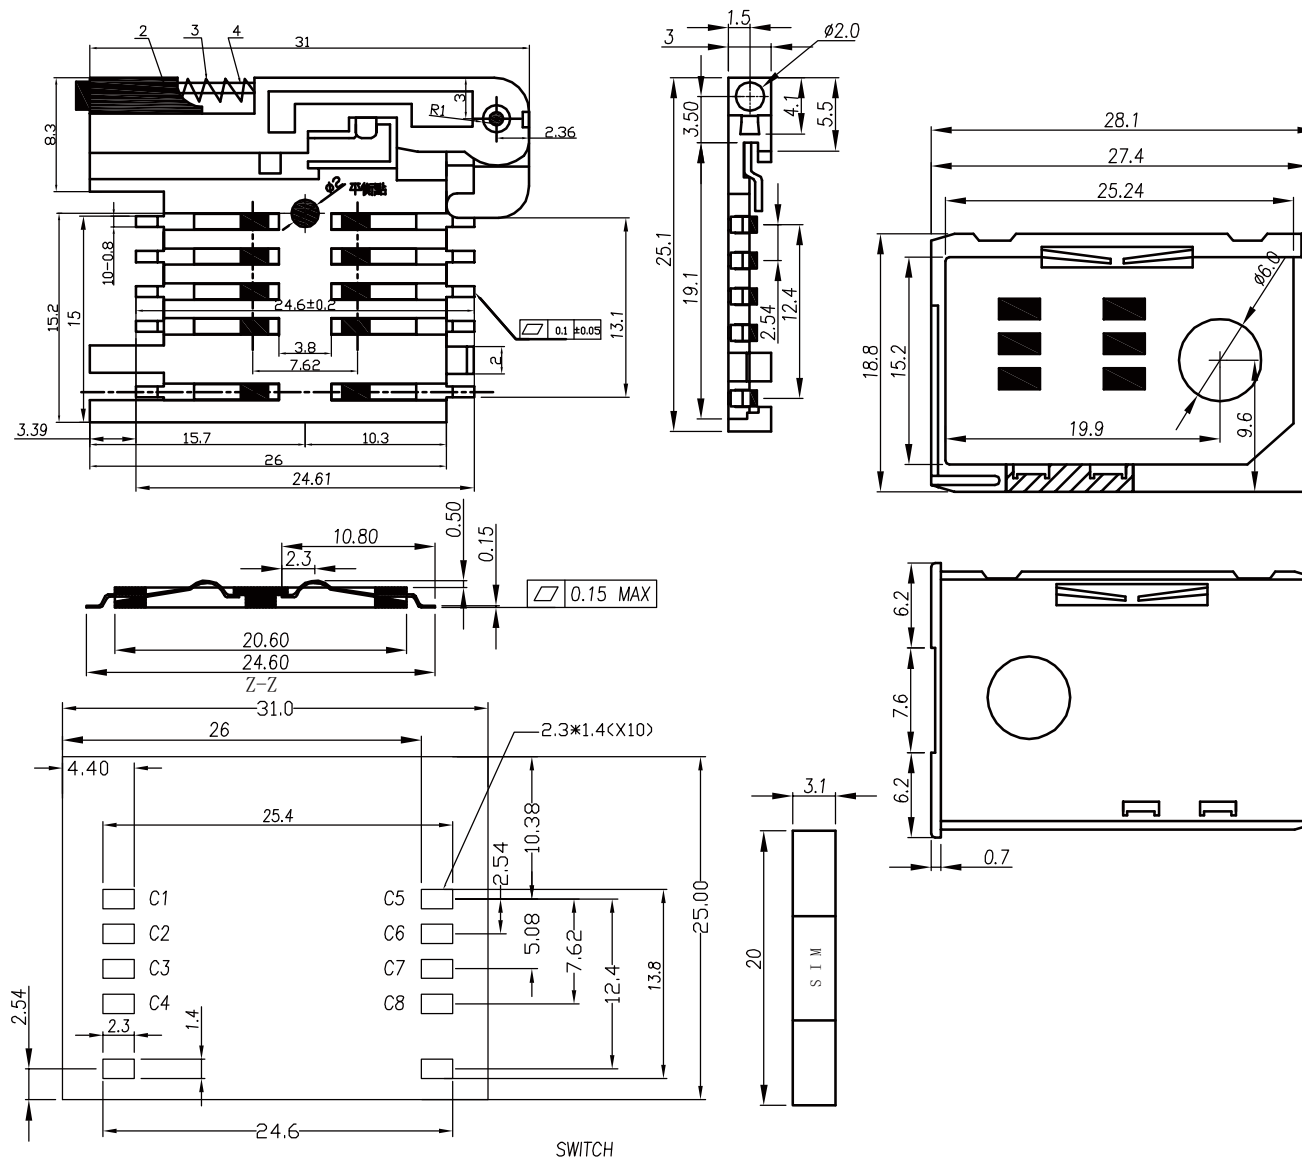

C1	VCC	C5	GND
C2	RST	C6	VPP
C3	CLK	C7	I/O
C4	NC	C8	NC

Specification:

- * Withstanding Voltage: 500V DC /1M.
- * Insulation Resistance: 1000M Ohm
- * Voltage Rating: 5V AC
- * Current Rating: 0.5A/Product Max.
- * Contact Resistance: 60m Ohm Max.
- * Operating Temperature: -25°C ~ +85°C
- * Insertion Cycles: 10000 Times Min
- * Press Force: 0.2N~0.6N

Material and Finish:

- * Housing: LCP+30%G.F. UL 94V-0, Black
- * Contact: Copper Alloy
- * Contact Area: Gold Plating All Over Ni

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

ORDER INFORMATION

SCE-W2231-xx-LF
SERIES | | LEADFREE
06.08 WAY
LONG 31.0mm
PAD TO PAD 22.30mm
90°SMT

DESCRIPTION: SIM CARD CONN. PUSH-IN/OUT SMT TYPE