

NOTE:

1.CARD INSERTION SPECIFICATION





- CARD INSERTION DEPTH:35.2mm.
- CARD THICKNESS=0.7~0.8mm.

2.READING CONTACT:



POSITION: ACCORDING TO
ISO 07816-2 C1-C8.
CONTACT FORCE:30~60 GRAM.

3.MATERIAL AND FINISH:


- HOUSING: PBT UL 94-V0 COLOR: BLACK.
- CONTACT: COPPER ALLOY.SELECTIVE PLATING AU OVER 50u" NI MIN UNDERPLAT TIN ON TAIL ZONE.
- SWITCH: COPPER ALLOY.SELECTIVE PLATING AU 1u" OVER 50u" NI MIN UNDERPLAT TIN ON TAIL ZONE.

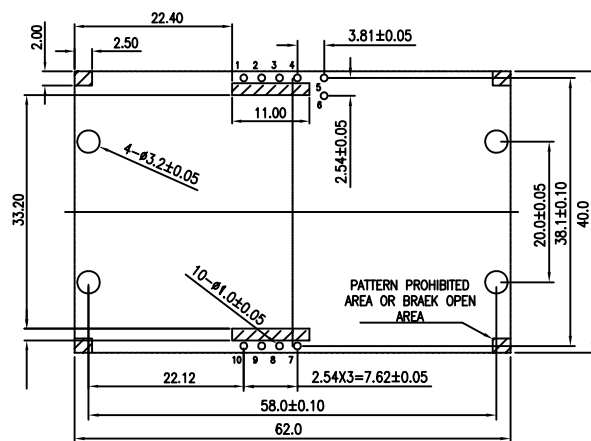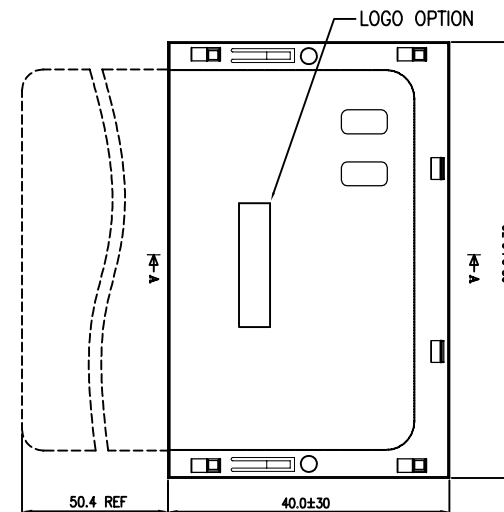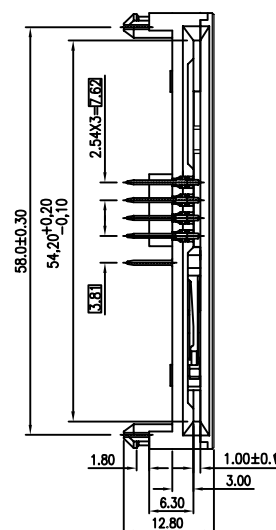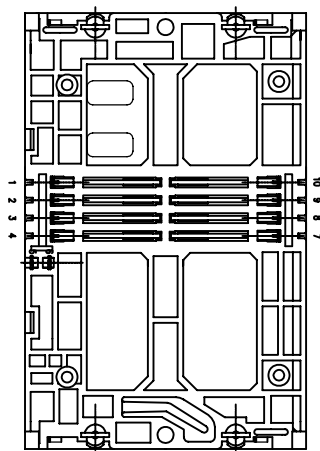

RECOMMENDED PCB LAYOUT

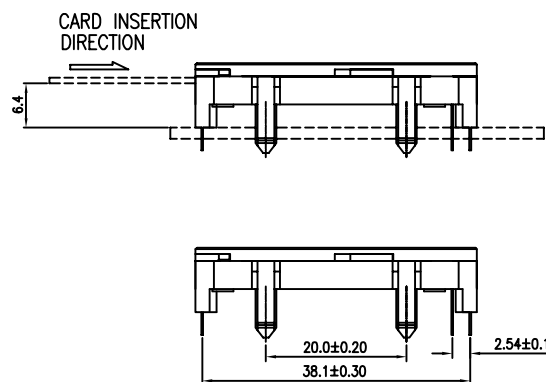

SECTION A-A



NOMAL CLOSE NOMAL OPEN

SWITCH CONTACT TYPE

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

SCF-R64xCH-08-LF
SERIES | LEADFREE
08 WAY
CENTER HIGH
A:CLOSED/SWITCH
B:OPEN/SWITCH
DIP 90°
64:HIGH 6.4mm

DESCRIPTION: Smart Card Connector Series (Long Post & Rim Type)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±