
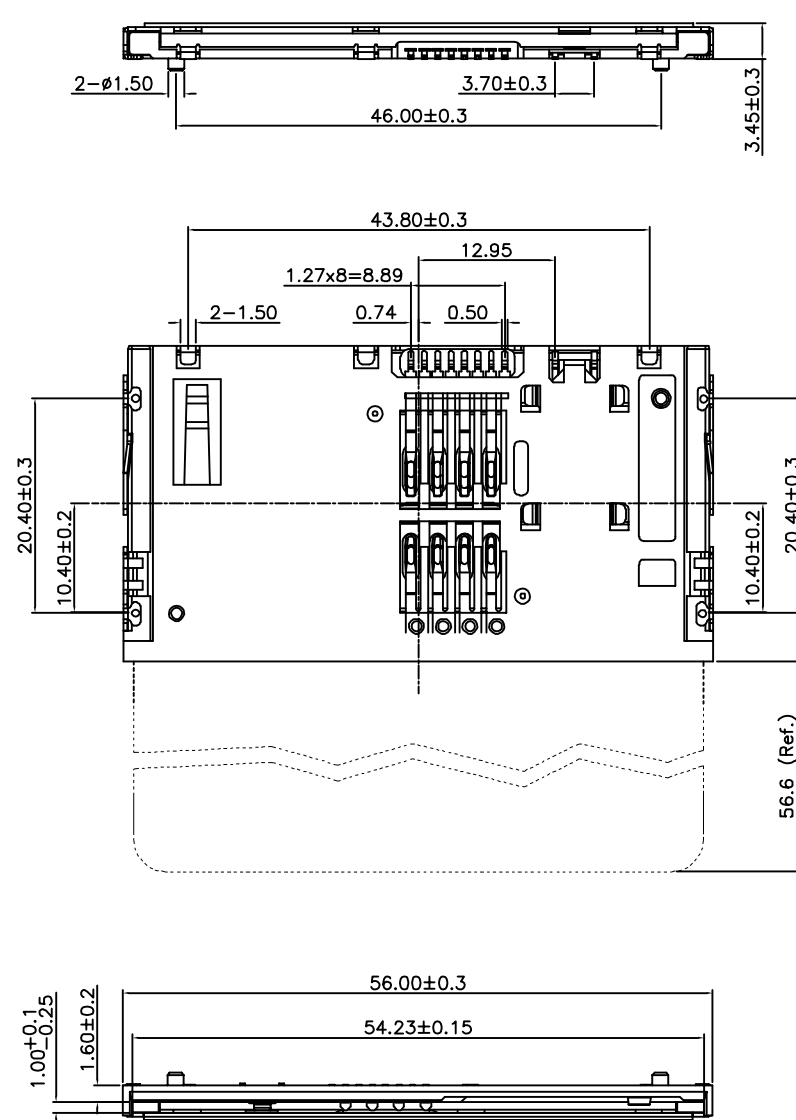
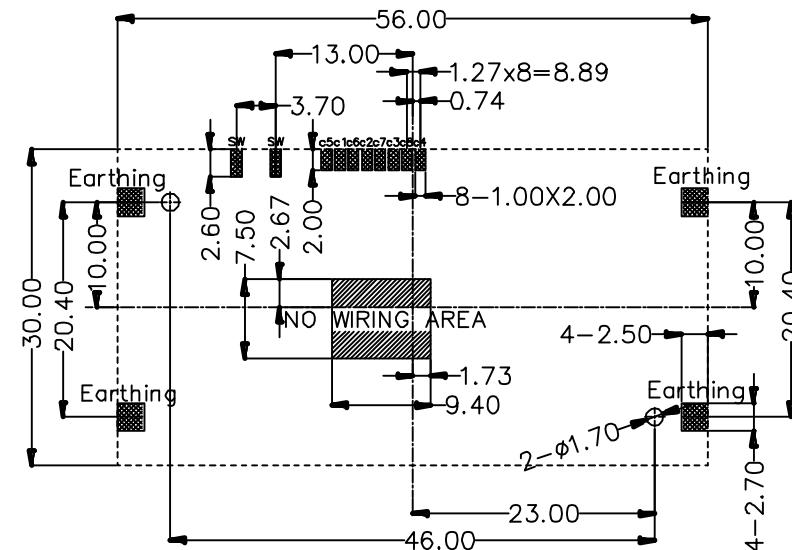


ELECTRIC FUNCTION	DETECT SWITCH
WITHOUT CARD	OPEN
CARD INSERTED	CLOSED



TECHNICAL CHARACTERISTICS

1.General Characteristics

Dimensions: 56.0L X 30.0W X 3.45H mm

Weight: Approx 7.5±0.5g

Durability: 300,000 cycles min.

2.Electrical Characteristics

Contact resistance: 50Ω typical, 100Ω max

Insulation resistance: >1000MΩ/500V DC

3.Solderability

Vapor phase: 215°C.30sec.Max

IR reflow: 260°C.10sec.Max

Manual soldering: 370°C.3sec.Max

4.Environmental Characteristics

Operating temperature: -40°C~+85°C

Operating humidity: 10%~+95%RH

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ± 2°

照片框

ORDER INFORMATION

SCF-W34B-08-LF
SERIES LEADFREE
08 WAY
SWITCH OPEN
HIGH 3.45mm
90°SMT

DESCRIPTION: SMART CARD