
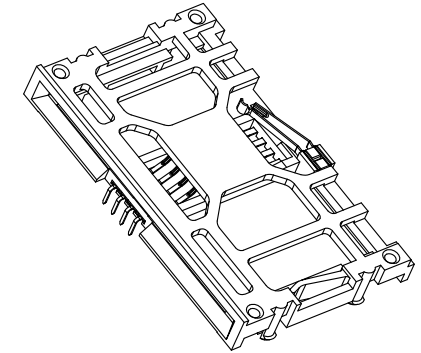
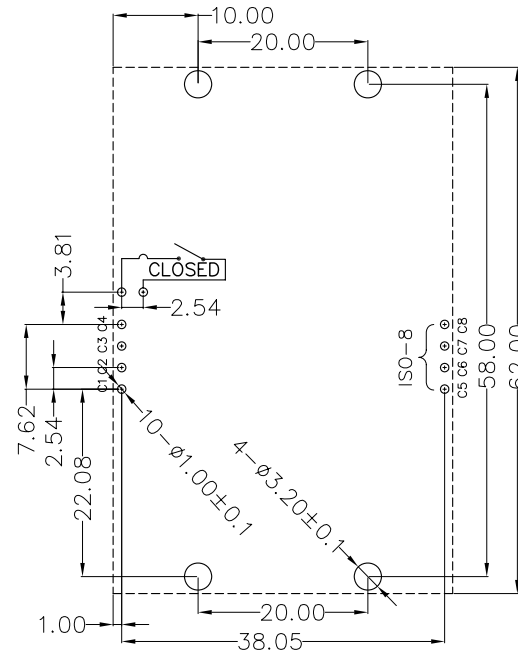
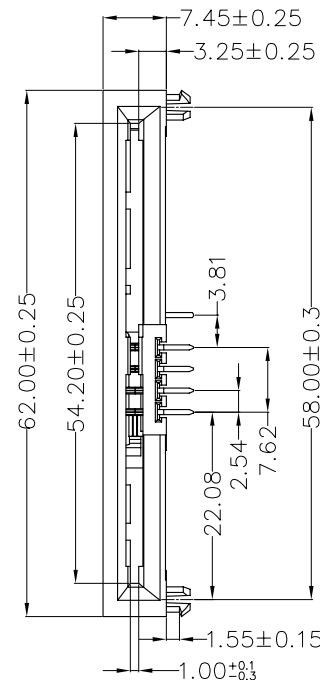
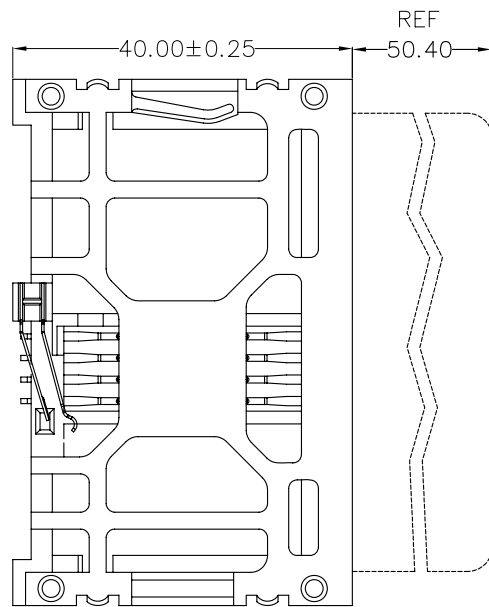


ELECTRIC FUNCTION	DETECT SWITCH
WITHOUT CARD	CLOSED
CARD INSERTED	OPEN



SWITCH OPERATION DIAGRAM

TECHNICAL CHARACTERISTICS

1.General Characteristics

Dimensions: 62.0LX40.0WX7.4H mm

Weight: Approx6.65±0.5g

Durability: 100,000 cycles min.

2.Electrical Characteristics

Contact resistance: 50mΩ typical, 100mΩ max

Insulation resistance: >1000MΩ/500V DC

3.Solderability

Manual soldering: 370°C, 3sec.Max

4.Environmental Characteristics

Operating temperature: -40°C~+85°C

Operating humidity: 10%~+95%RH

ITEM	PART NAME	Q'TY	MATERIAL	FINISH
1	BASE	1	Thermoplastic	Black UL94V-0
2	DATA CONTACT 1	8	Copper Alloy	Contact area:Gold plated
3	SWITCH CONTACT 1	1	Copper Alloy	Contact area:Gold plated
4	SWITCH CONTACT 2	1	Copper Alloy	Contact area:Gold plated

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

SCFA-R32ACH-08-LF

SERIES 08 WAY LEADFREE
CENTER HIGH
CLOSED/SWITCH
HIGH 3.25mm
DIP 90°

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ± 0.40
.X ± 0.30
.XX ± 0.15
.XXX ±
ANG ± 2°

DESCRIPTION: Smart Card 8+2P Acceptor 7.45H IC CARD卡座带开关常开CONN