
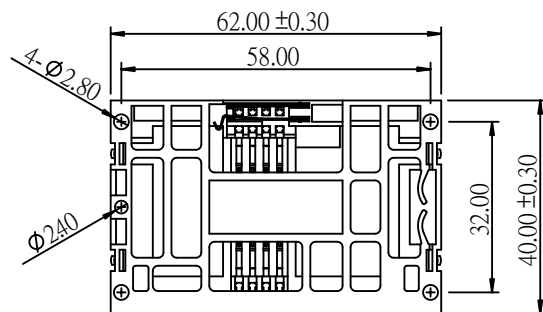

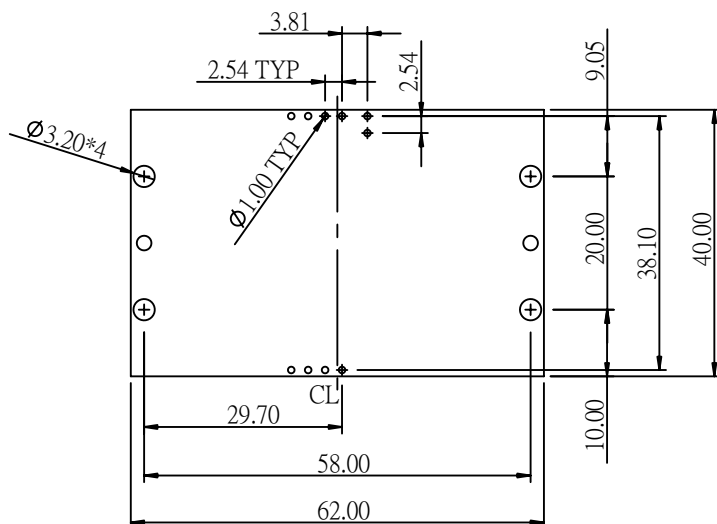


NOTE:

- 1.HOUSE MATERIAL: PBT+30%G.F 94L V-0 COLOR: BLACK.
- 2.TERMINAL MATERIAL: COPPER ALLOY, THICKNESS = 0.30 ± 0.02 .
FINISH: GOLD PLATE ON CONTACT AREA, TIN PLATE ON SOLDER TAIL, NICKEL ON ALL SURFACE
- 3.GROUND SPRING PIN: COPPER ALLOY, THICKNESS = 0.25 ± 0.02 .
FINISH: TIN OR GOLD PLATE ON ALL SURFACE, NICKEL ON ALL SURFACE.
- 4.GROUND PIN: COPPER ALLOY, THICKNESS = 0.25 ± 0.02 mm.
FINISH: TIN OR GOLD PLATE ON ALL SURFACE, NICKEL ON ALL SURFACE
- 5.OPERATING TEMPERATURE: $-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$.
- 6.CURRENT RATING: 1 Amp MAX.
- 7.●: MANUFACTURER INSPECTION.
- 8.◆: Q.C INSPECTION.

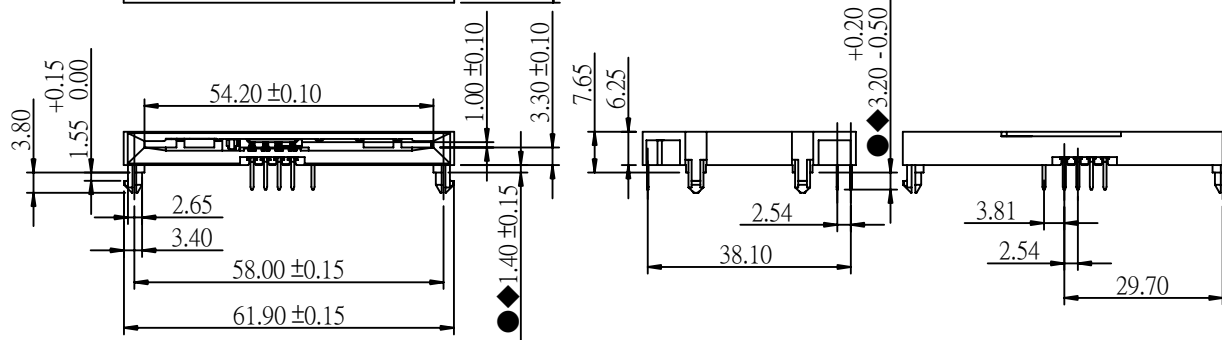

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

SCFA-R62A14-08-LF

SERIES
DIP 90°
LEADFREE
08 WAY
1.4mm/STANDOFF
CLOSED/SWITCH
HIGH 6.25mm

DESCRIPTION: