


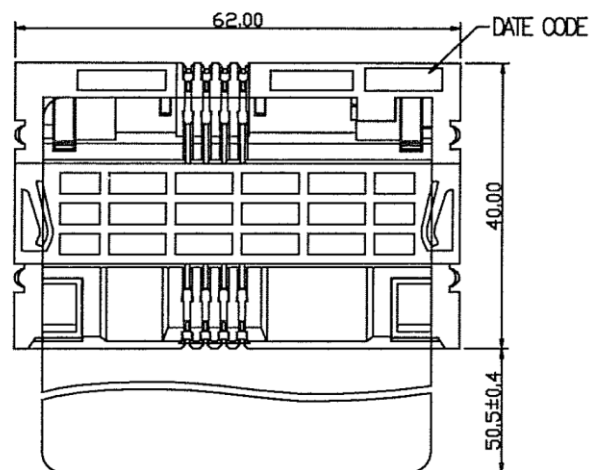
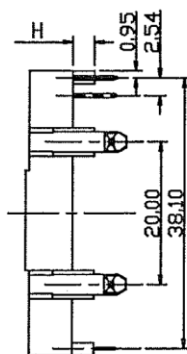


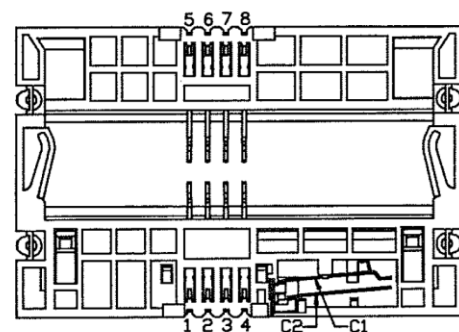


THE LENGTH AFTER INSERT CARD

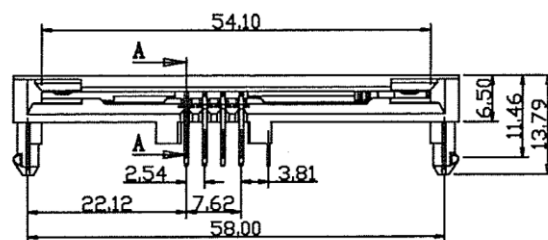

Stand off H: 3.00mm
3.50mm
5.55mm

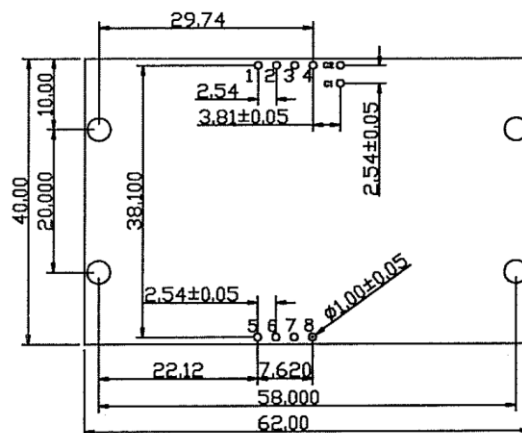


RECOMMENDED P.C.B. LAYOUT
P.C.B THICKNESS=1.60mm

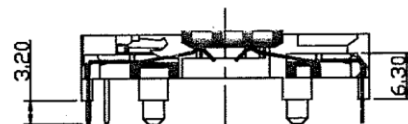

SEC A-A

NOTE:

1. MATERIAL AND FINISH:
A. HOUSING: PBT UL 94-VO COLOR: BLACK.
B. CONTACT: BRASS. SELECTIVE PLATING AU OVER 50u" NI MIN UNDERPLAT SN ON TAIL ZONE(RoHS).
C. SWITCH: PHOSPHOR BRONZE. SELECTIVE PLATING AU OVER 50u" NI MIN UNDERPLAT SN ON TAIL ZONE(RoHS).
2. READING CONTACT:
POSITION: ACCORDING TO ISO 07816-2 C1-C8.
CONTACT FORCE: 30-50 GRAM.
3. CARD INSERTION SPECIFICATION
A. CARD INSERTION DEPTH: 35.5 MM.
B. CARD THICKNESS=0.7-0.8 MM.
4. DATE CODE: YY MM DD



Close Type

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X.±

.X±

.XX±

.XXX±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SCFA-R65Axx-08-LF

SERIES

DIP 90°
HIGH 6.50mm

LEADFREE
08 WAY

30:3.00mm/STANDOFF
35:3.50mm/STANDOFF
55:5.55mm/STANDOFF
CLOSED/SWITCH

DESCRIPTION: