
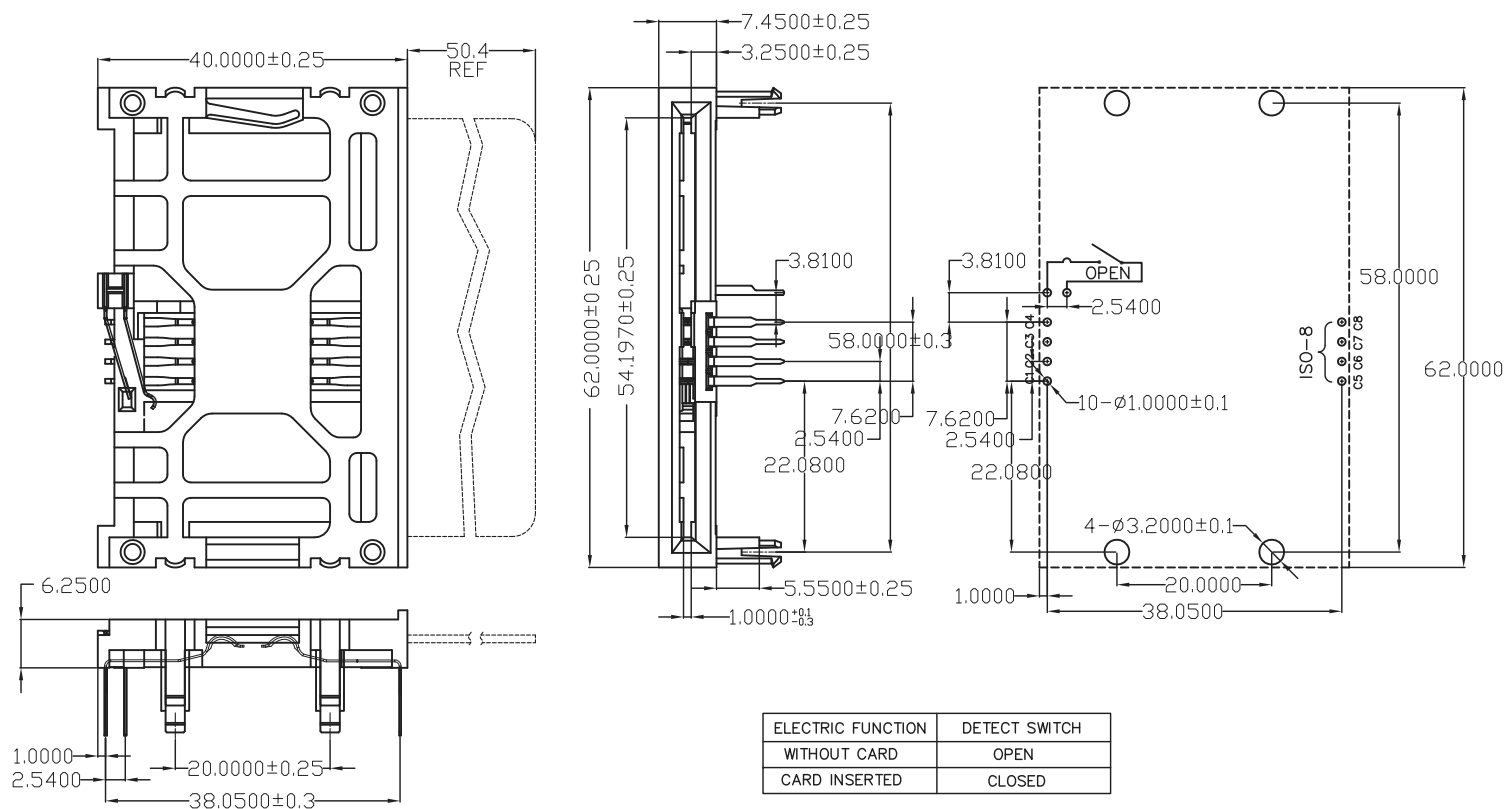


TECHNICAL CHARACTERISTICS

- General Characteristics
Dimensions: 62.0LX40.0WX13.0H mm
Weight: Approx 7.65±0.5g
Durability: 100,000 cycles min.
- Electrical Characteristics
Contact resistance: 50mΩ typical, 100mΩ max
Insulation resistance: >1000MΩ/500V DC
- Solderability
Manual soldering: 370°C, 3sec. Max
- Environmental Characteristics
Operating temperature: -40°C~+85°C
Operating humidity: 10%~+95%RH

ELECTRIC FUNCTION	DETECT SWITCH
WITHOUT CARD	OPEN
CARD INSERTED	CLOSED



SWITCH OPERATION DIAGRAM

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ±

ORDER INFORMATION

SCFA-R74B55-08-LF

SERIES

LEADFREE

08 WAY

5.55mm/STANDOFF

OPEN/SWITCH

HIGH 7.45mm

DIP 90°

DESCRIPTION: SMART CARD AC