

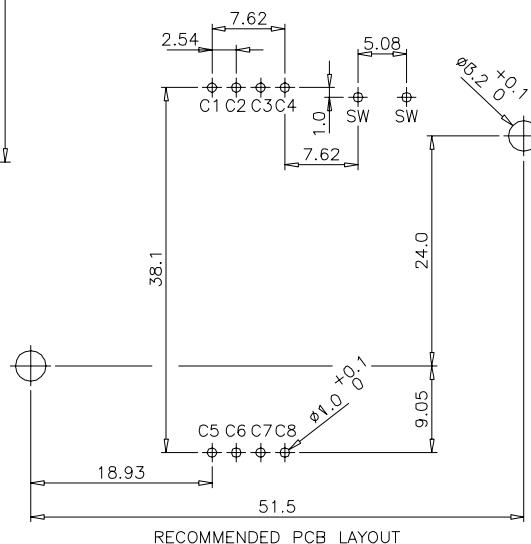
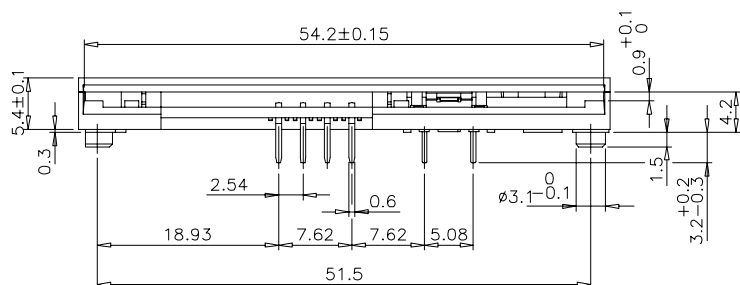
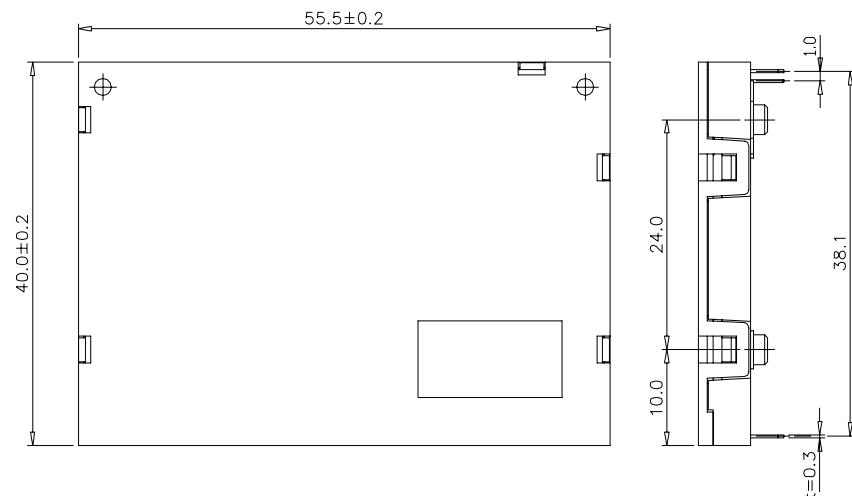




- Material and Finish:**
- 1.Base Material: Nylon-9T(G2458HF),UL94V-0,Color:Black
 - 2.Cover Material: Nylon-9T(G2458HF),UL94V-0,Color:Black
 - 3.Slider Material: Nylon-9T(G2458HF),UL94V-0,Color:Black
 - 4.Contact Material: Phosphor Bronze(C5210R-SH),t=0.3mm
 - 5.Bearing Material: Phosphor Bronze(C5191)
 - 6.Switch Actuator Material: SUS-304(JISG4313),t=0.4mm
 - 7.Rock-Arm Material: SUS-304(JISG4313),t=0.15mm
 - 8.Spring Material: SK85(K5),HRc45°~47°,t=0.3mm
 - 9.Underplate: 40u" Nickel Plated
 - 10.Contact Area Plated: 50u" Gold Plated
 - 11.Solder Area Plated: 100u" Tin Plated
 - 12.Spring Plated: 40u" Nickel Plated
 - 13.Bearing Plated: 50u" Nickel Plated
 - 14.Tach Switch:
 - 14-1.Body Material: Nylon 66,Color:Blue
 - 14-2.Cover Material: Phosphor Bronze / Tin Plated
 - 14-3.Dome: Stainless Steel (SUS304)
 - 14-4.Terminal: Brass / Silver Plated
 - 14-5.Rubber: Rubber
 - 15.Current Rating: 10 uA Min. / 1A max.
 - 16.Contact Resistance: 100 milliohms Max.
 - 17.Insulation Resistance: 1000 megohms Min.
 - 18.Dielectric Withstanding Voltage: 750 V AC/minute
 - 19.Operation Temperature: -40°C to +85°C
 - 20.Card Insertion Force: 10 N Max.
 - 21.Card Extraction Force: 1 N Min. / 10N Max.
 - 22.Contact Force: 0.25 N Min. / 0.5 N Max.
 - 23.Card Detection Switch: Normally Open
 - 24.Durability: 200,000 Mating Cycles



照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

ORDER INFORMATION

SCL-R54B-08-LF

SERIES
LEADFREE
08WAY
SWITCH OPEN
HIGH 5.4mm
DIP 90°

DESCRIPTION: