
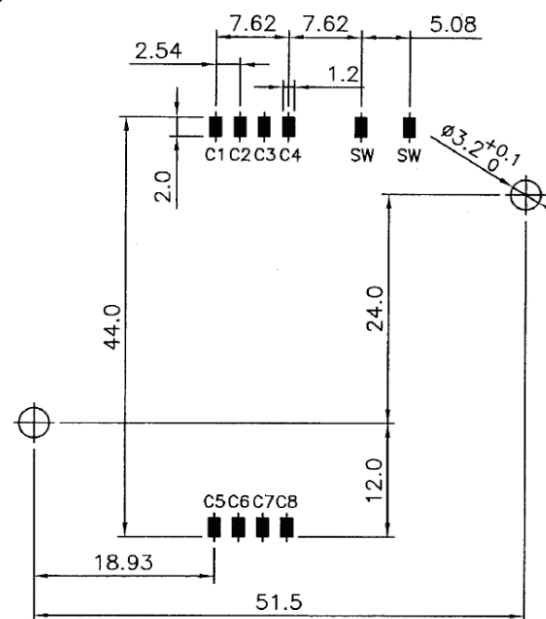
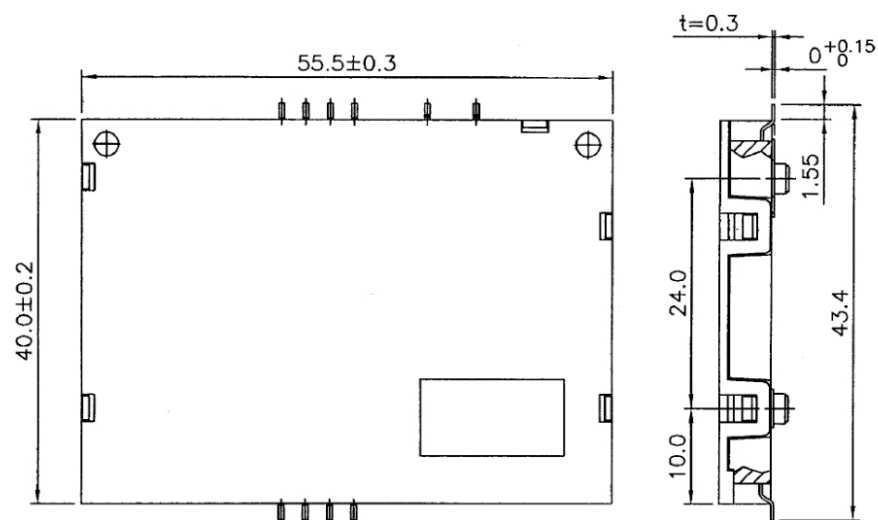
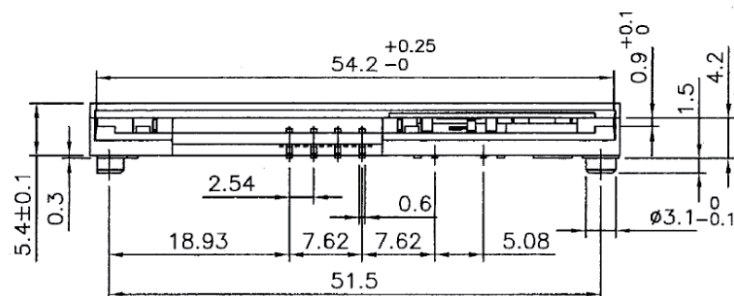


- Material and Finish:**
1. Base Material: Nylon-9T, UL94V-0, Color: Black
 2. Cover Material: Nylon-9T, UL94V-0, Color: Black
 3. Slider Material: Nylon-9T, UL94V-0, Color: Black
 4. Contact Material: Phosphor Bronze
 5. Spring Material: Stainless Steel
 6. Underplate: 40±10u" Nickel Plated
 7. Contact Area Plated: 30u" Gold Plated
 8. Solder Area Plated: 100u" Tin Plated
 9. Detect Contact Area Plated: 2u" Gold Plated
 10. Current Rating: 10 uA Min. / 1A max.
 11. Insulation Resistance: 1000M ohms Min.
 12. Dielectric Withstanding Voltage: 750V AC/minute
 13. Operation Temperature: -40°C to +85°C
 14. Card Insertion Force: 10 N Max.
 15. Card Extraction Force: 1 N Min. / 10N Max.
 16. Contact Force: 0.25 N Min. / 0.5 N Max.
 17. Card Detection Switch: Normally Open
 18. Durability: 200,000 Mating Cycles
 19. RO=RoHS

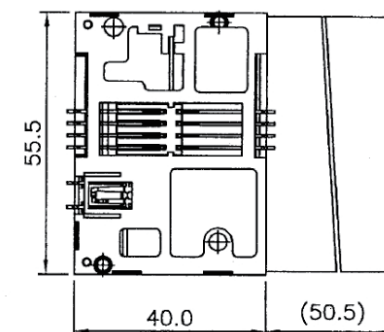

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.30

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

SCL-W54B-08-LF

SERIES | | LEADFREE
| | 08WAY
| | SWITCH OPEN
| | HIGH 5.4mm
| | 90°SMT

DESCRIPTION: