

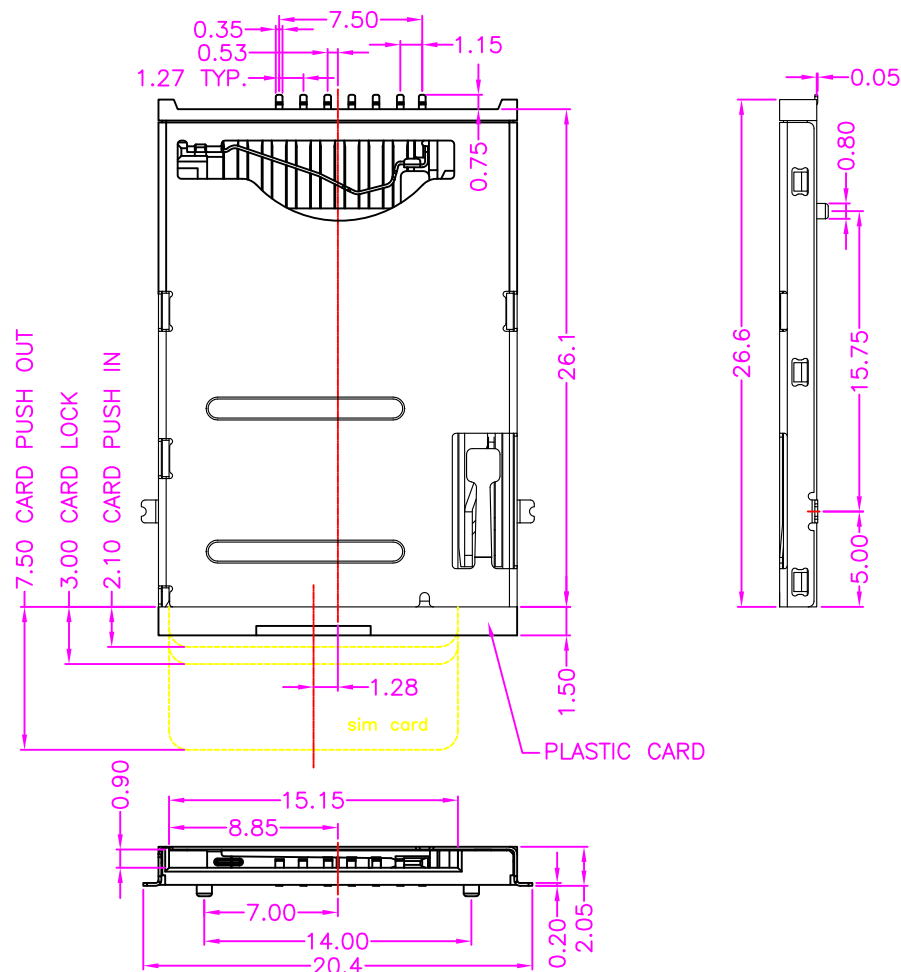


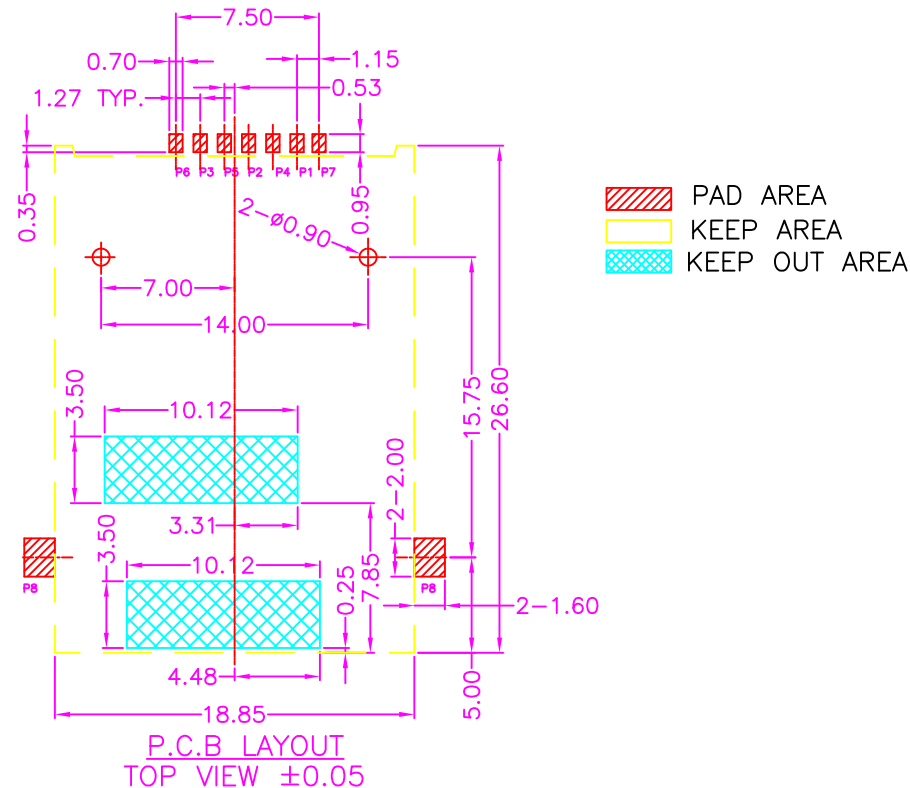

Connector terminal NO.	Pin NO.
Pin 1	VCC:PWR signal and GND
Pin 2	RST:Reset signal
Pin 3	CLK:Clocking signal
Pin 4	GND:PWR signal and GND
Pin 5	VPP:Programming Voltage
Pin 6	I/O:Serial data input/output
Pin 7	CD:CARD Detect Switch
Pin 8	GND

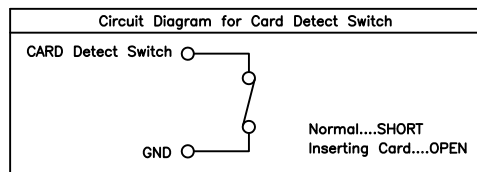

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0)
SHELL: COPPER ALLOY, NICKEL PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 0.5 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 100m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$ 0.10
ANG $\pm$ 5°

PPOJECTION

照片框

ORDER INFORMATION

SCP-W14PAA150-06-LF

SERIES

90°SMT

POST TO POST 14.0mm

LEADFREE

06WAY

SWITCH CLOSED

POST

DESCRIPTION:SIM CARD, 6PIN, PCB MOUNT, SMT, METAL SHIELD PUSH-PUSH TYPE, FEMALE