

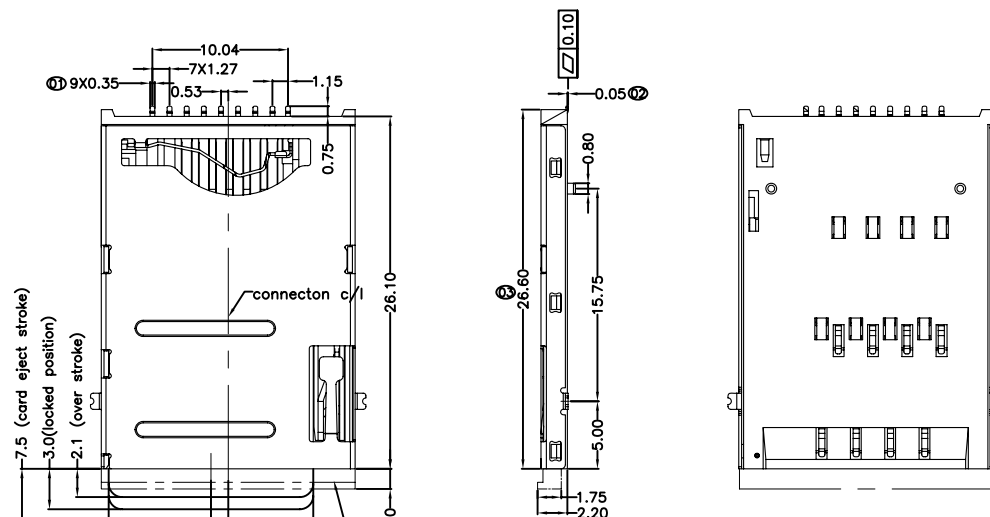


K	UPDATE Plastic Card DIMENSION	2016.12.13
J	ADD Plastic Card DIMENSION	2016.06.30
I	UPDATE	2015.05.29
H	CANCEL DATE CODE	2014.08.02
G	ADD CRITICAL DIMENSION	2014.05.27
F	ADD DATE CODE	2013.11.25
E	UPDATE SHELL THICKNESS	2013.11.19
D	UPDATE	2012.04.18
C	ADD SIM PIN SIGNAL	2011.07.28
B	UPDATE PIN SIGNAL	2011.01.21
A	RELEASE	2011.01.03
REV.	DESCRIPTION	DATE

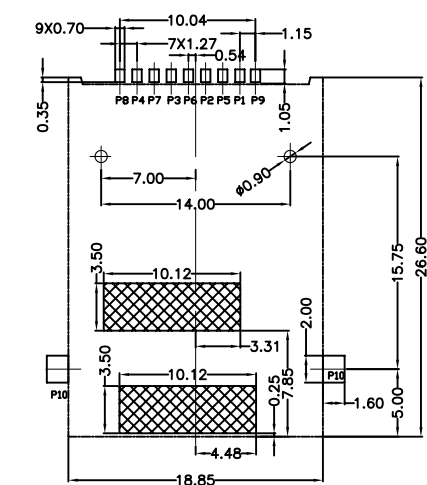

RECOMMEENDER PCB LAYOUT
TOLERANCE UNLESS OTHERWISE IS ± 0.05

□ PAD AREA
□ KEEP AREA
■ KEEP OUT AREA

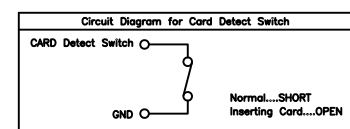

Connector terminal NO.	Pin NO.
Pin 1	VCC:PWR signal and GND
Pin 2	RST:Reset signal
Pin 3	CLK:Clocking signal
Pin 4	Reserved
Pin 5	GND:PWR signal and GND
Pin 6	VPP:Programming Voltage
Pin 7	I/O:Serial data input/output
Pin 8	Reserved
Pin 9	CD:CARD Detect Switch
Pin 10	GND

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0)
SHELL: COPPER ALLOY, NICKEL PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
TIN PLATING ON SOLDER TAIL
LINK: STAINLESS STEEL
SPRING: PAINO WIRE
PS: SHELL 與SOLDER PAD是一體成型

SPECIFICATION

CURRENT RATING: 0.5 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 100m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X, $\pm$
.XX, $\pm$
.XXX, $\pm$
ANG, $\pm$

PPOJECTION

照片框

ORDER INFORMATION

SCP-W14PAA150-08-LF

SERIES LEADFREE

90°SMT 08WAY

POST TO POST 14.0mm EAR TO POST 15.75mm

POST SWITCH CLOSED

DESCRIPTION: SIM CARD, 8 PIN, PCB MOUNT, SMT, METAL SHIELD, PUSH-PUSH TYPE, FEMALE WITH POST