

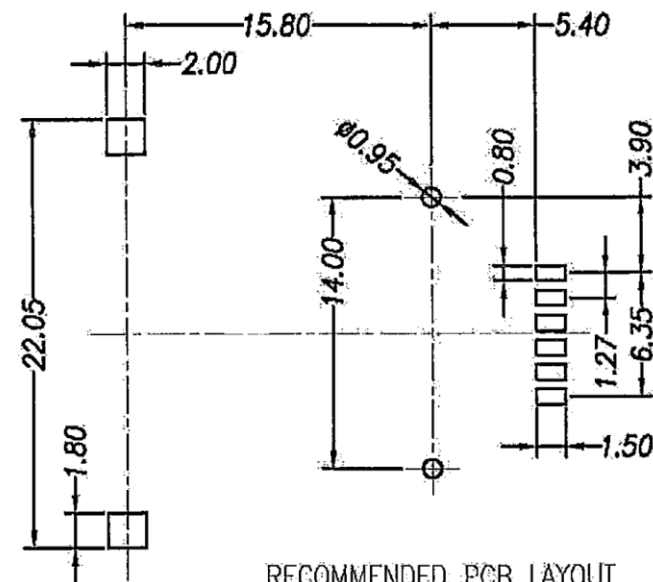
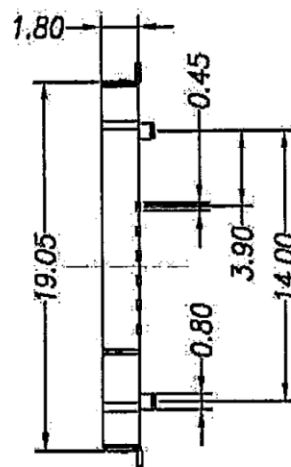
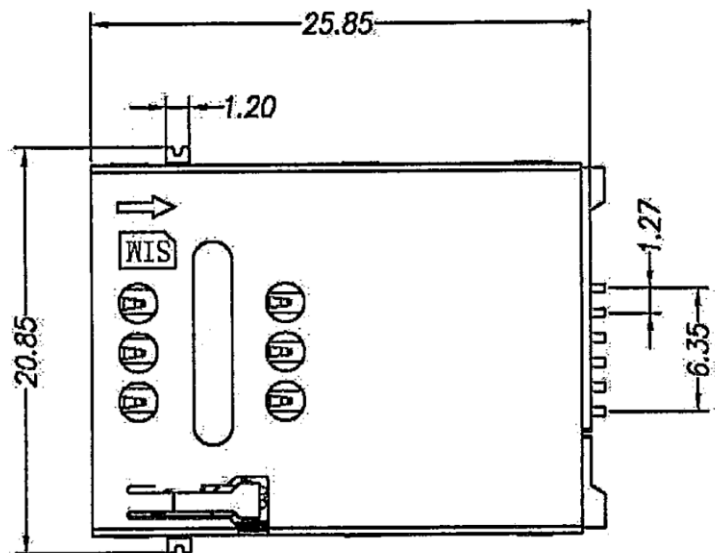


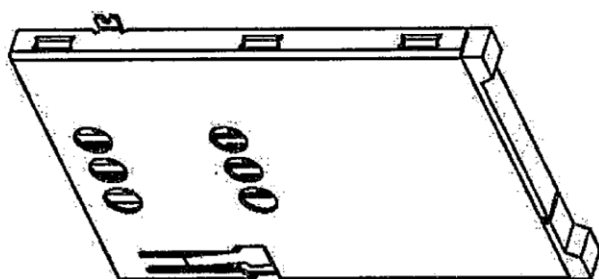

RECOMMENDED PCB LAYOUT
CONNECTOR SIDE

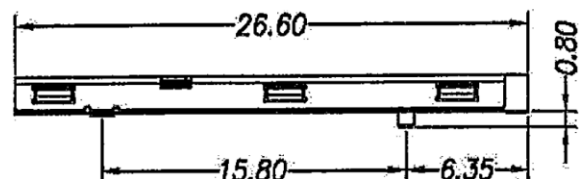

NOTES:

1. ELECTRICAL:

- 1). VOLTAGE RATING: 150V AC
- 2). CURRENT RATING: 0.5A
- 3). CONTACT RESISTANCE: 100mΩ MAX INITIAL; 150mΩ MAX FINAL
- 4). DIELECTRIC WITHSTANDING VOLTAGE: 500 AC 1 MINUTE
- 5). INSULATION RESISTANCE: 500MΩ MIN.

2. MATERIAL:

INSULATOR: LCP UL 94V-0 BLACK;

TERMINAL: COPPER ALLOY;

3. OPERATING TEMPERATURE: -25° TO +85°

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
X, ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

SCP-W14PX-06-LF

SERIES LEADFREE

90°SMT 06WAY
NON SWITCH

POST
POST TO POST 14.0mm

DESCRIPTION: