
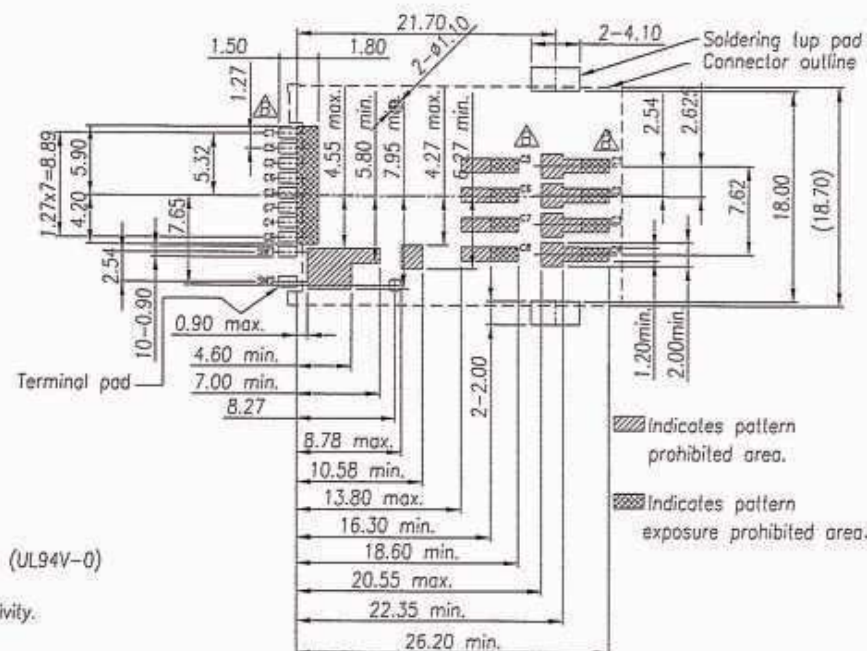
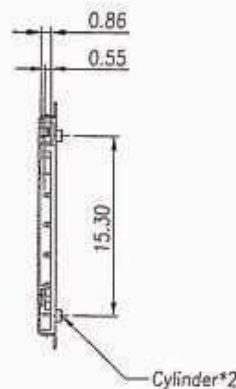


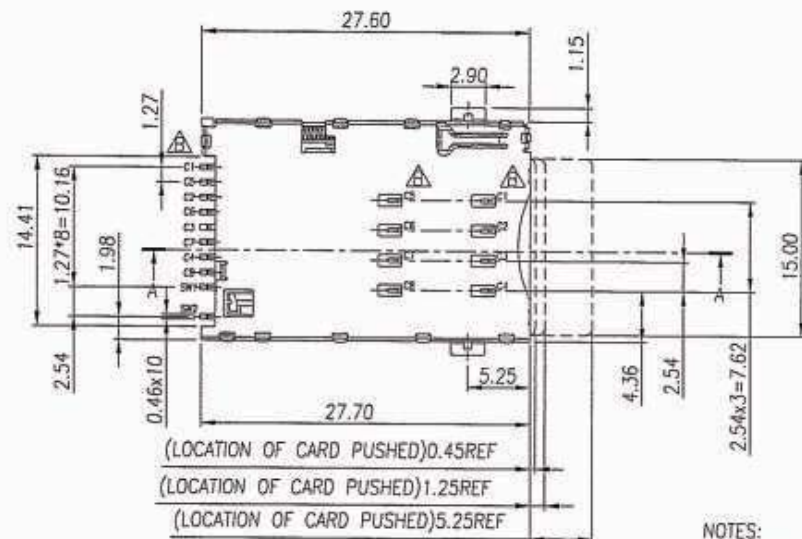

NOTES:



- General Characteristics
Mounting System:SMT
Durability:3,000 cycles min.
- Material and Finish:
Insulation material:High Temperature Plastic (UL94V-0)
Contact material:Copper Alloy
Contact Finish:See Order Information Selectivity.
- Electrical Characteristics
Number of contacts: 8 Position
Contact resistance:

Contact : 100 mΩ Max.
Switch: 200 mΩ Max.



Insulation resistance:>1000 megaohms /500 VDC
Withstanding Voltage: 500 V AC rms 1minute
Operation:Normally open.

- Environmental Characteristics
Operating temperature:-40°C~+85°C

THE RECOMMENDED PCB LAYOUT
(TOLERANCE=±0.05mm)

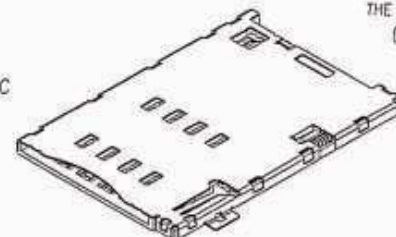

SECTION:A-A
SCALE 1:1

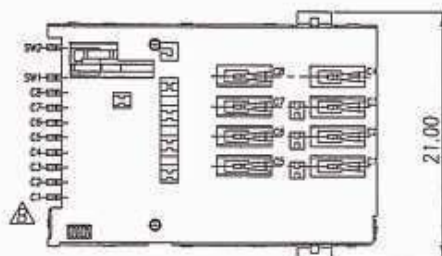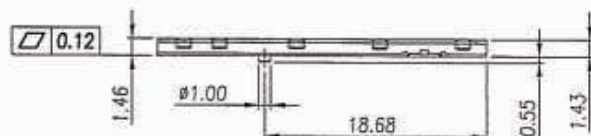

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
X, ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

SCP-W15PBB-08-LF

SERIES LEADFREE

08WAY

SWITCH OPEN

BTM/CTT

POST TO POST 13.61mm

90°SMT

DESCRIPTION:


Signals interface connections

Contact No	Assignment	Description
C1	VCC	Power Viltage
C2	RST	Reset Signal
C3	CLK	Clocking Signal
C4	RFU	Reserve for feature use
C5	GND	Power and Signal Ground
C6	VPP	Programming Voltage
C7	I/O	Serial Date input/output
C8	RFU	Reserve for feature use

Circuit Diagram for Card Detect Seitch



SIM Card Contact Location Dimensions in millimeter(mm)

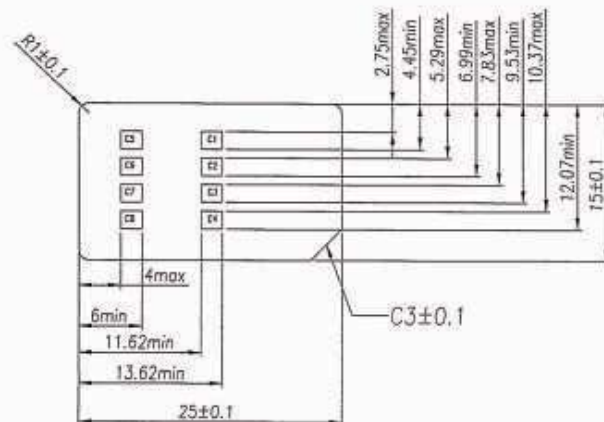

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

SCP-W15PBB-08-LF

SERIES

LEADFREE

08WAY

SWITCH OPEN

BTM/CTT

POST TO POST 13.61mm

90°SMT

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±