



WITHOUT CARD




CARD INSERTED



CARD DETECT SW. STATUS.

NOTE:

- (1) MATERIAL:
HOUSING: LCP WITH GLASS FIBER REINFORCED, PER UL 94V-0
RATED, COLOR BLACK.
CONTACTS: PHOSPHOR BRONZE.
METAL COVER AND BOARDLOCKS: STAINLESS STEEL SHEET.
- (2) FINISH:
CONTACTS: GOLD FLASH IN CONTACT AREA, MATTE-TIN ON SOLDER TAIL,
WITH ENTIRE CONTACT, UNDERPLATED $1.27\mu\text{m}$ [50μ] MIN. NICKEL.
BOARDLOCKS: GOLD FLASH ON SOLDER TAIL, WITH ENTIRE SOLDER
TAIL UNDERPLATED $1.27\mu\text{m}$ [50μ] MIN. NICKEL.

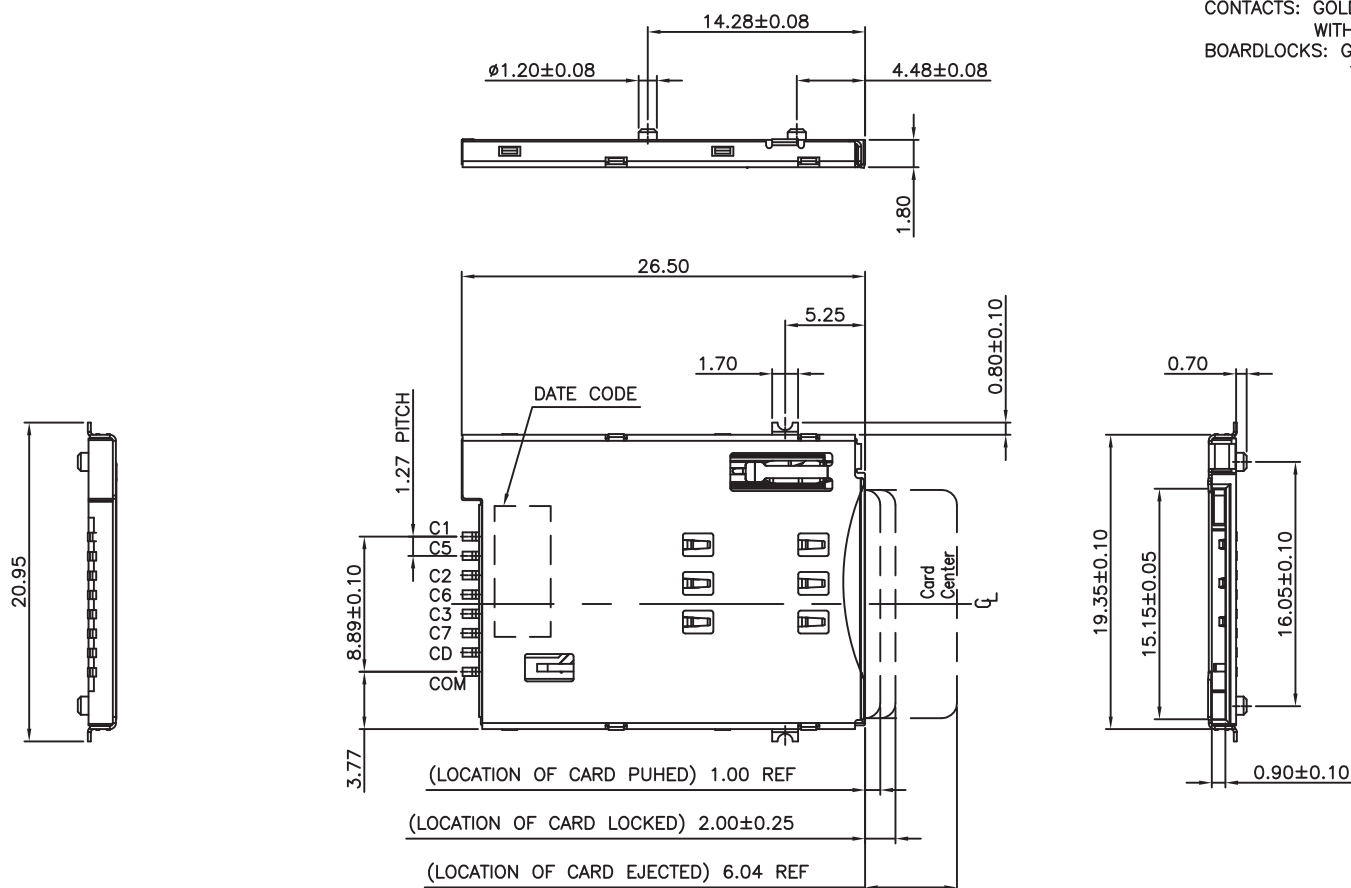

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

SCP-W16PB-06-LF
SERIES T LEADFREE
06WAY
SWITCH OPEN
POST
POST TO POST 16.0mm
90°SMT

DESCRIPTION: SIM CARD CONNECTOR, 6+2 PDS,

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

X. ± 0.30

CHECKED BY GENIUS

X. ± 0.20

UNIT / mm

SCALE 1 : 1

.XX ± 0.10


DATE

.XXX ± 0.05


ANG \pm

SIZE A4

PPOJECTION

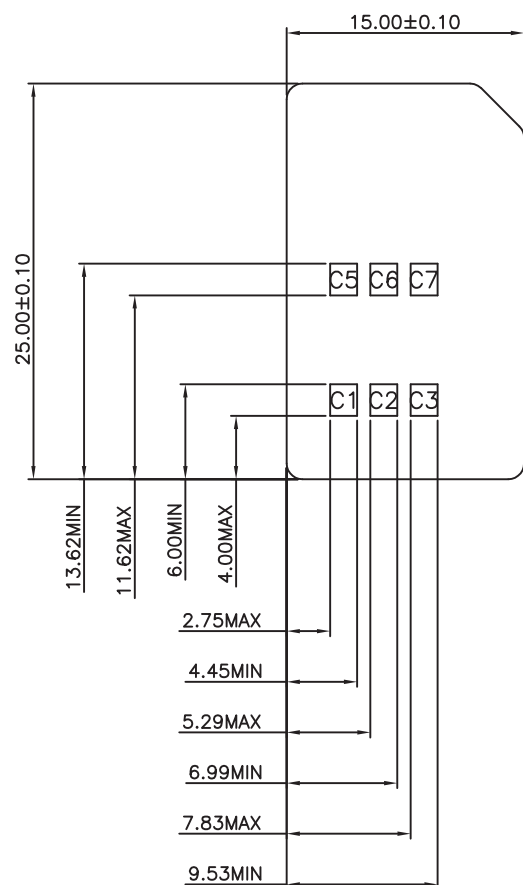

APPLICABLE CARD SIZE

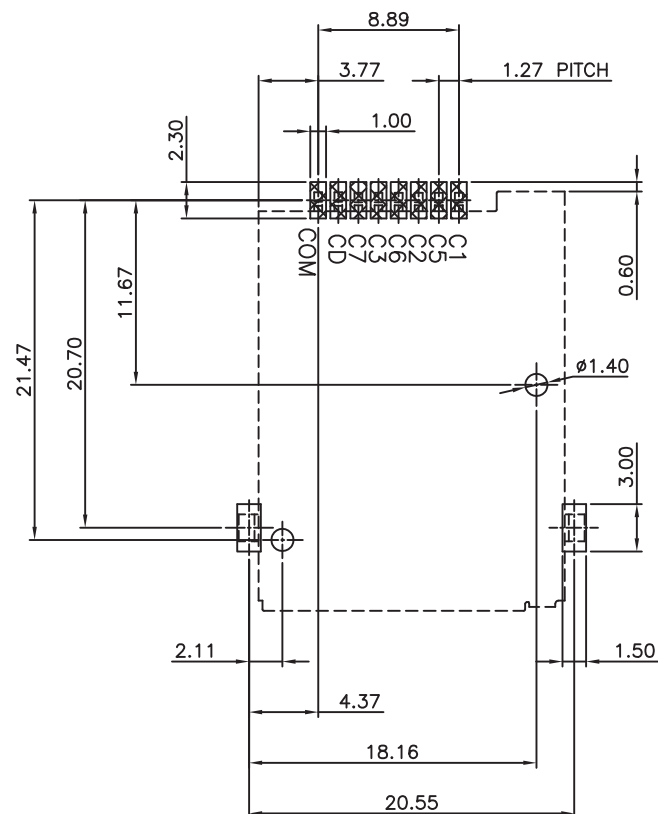

RECOMMENDED PCB LAYOUT

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.30

.X ± 0.20

.XX ± 0.10

.XXX ± 0.05

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SCP-W16PB-06-LF

SERIES

LEADFREE

06WAY

SWITCH OPEN

POST

POST TO POST 16.0mm

90°SMT

DESCRIPTION: SIM CARD CONNECTOR, 6+2 PDS,