


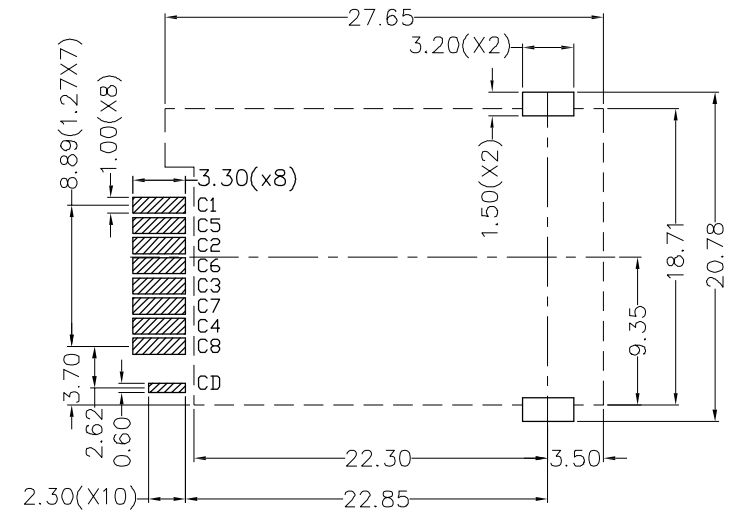
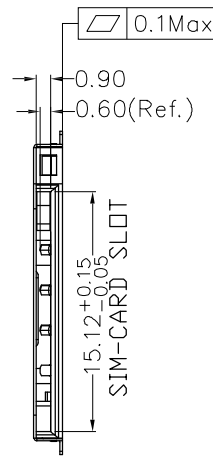
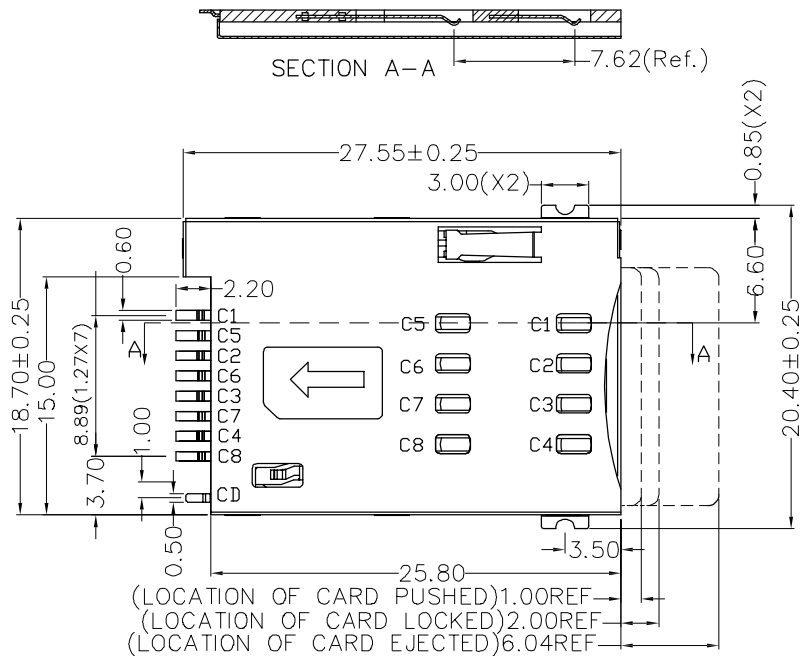


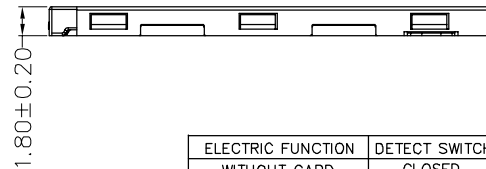

RECOMMENDED P.C.B LAYOUT
COMPONENT SIDE(TOLERANCE ±0.05)

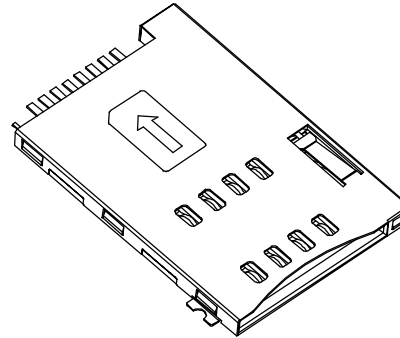

ELECTRIC FUNCTION	DETECT SWITCH
WITHOUT CARD	CLOSED
CARD INSERTED	OPEN



MATERIALS:

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
TERMINAL: PHOSPHOR BRONZE, CONTACT AREA GOLD PLATED
SOLDER AREA MATTE TIN PLATED

SPECIFICATION:

CURRENT RATING: 0.5 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -25°C~+85°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 3°

照片框

ORDER INFORMATION

SCP-W19EA-08-LF
SERIES
90°SMT
LEADFREE
08 WAY
CLOSE SWITCH
EAR
PAD TO PAD 19.3mm

DESCRIPTION: SIM CARD, 8PIN, PCB MOUNT, SMT, METAL
SHIELD, FEMALE, (NORMALLY CLOSE)