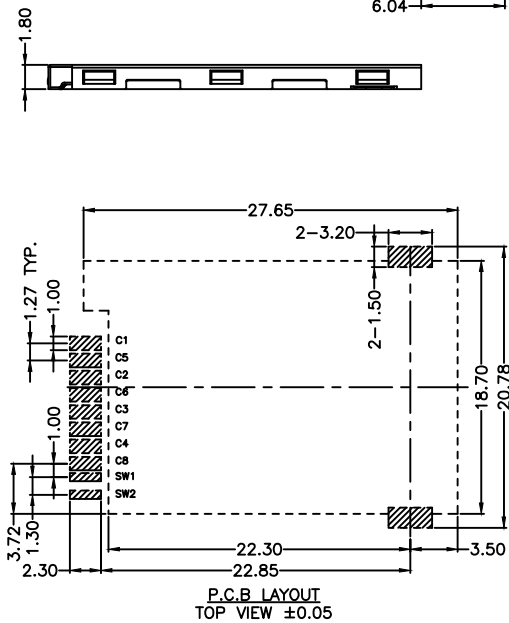


CURRENT RATING: 0.5 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -25°C~+85°C

CONNECTOR PIN NO.	DESCRIPTION
Pin 1	VCC:PWR signal and GND
Pin 2	RST:Reset signal
Pin 3	CLK:Clocking signal
Pin 4	Reserved
Pin 5	VCC:PWR signal and GND
Pin 6	VPP:Programming Voltage
Pin 7	I/O:Serial date input/output
Pin 8	Reserved

照片框

SCP-W20EB-08-LF

SERIES 90°SMT 20mm EAR OPEN TYPE 08WAY LEADFREE

DESCRIPTION: