

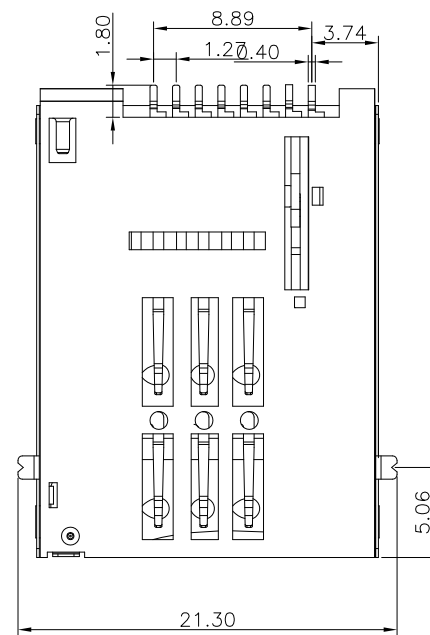




SIM pin assignment	
PIN#	Name
C1	VCC 电压
C2	RST 重置
C3	CLK 时钟
C5	GND 接地
C6	VPP 电压
C7	I/O 输入输出

CIRCUIT:

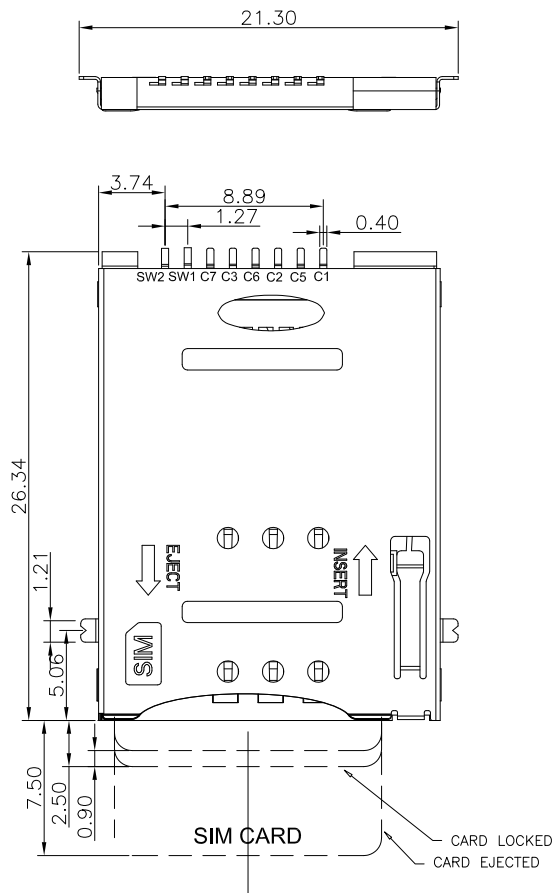

WITHOUT SIM CARD



SIM CARD INSERTED

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±


PPOJECTION

照片框

ORDER INFORMATION

SCP-W20EBR-06-LF
SERIES 90°SMT
LEADFREE 06WAY
REEL
OPEN TYPE
EAR 20mm


DESCRIPTION: SIM CARD, 6+2PIN, PCB MOUNT, SMT, METAL SHIELD, FEMALE, (PUSH-PUSH TYPE) H=1.85 WITHOUT POST

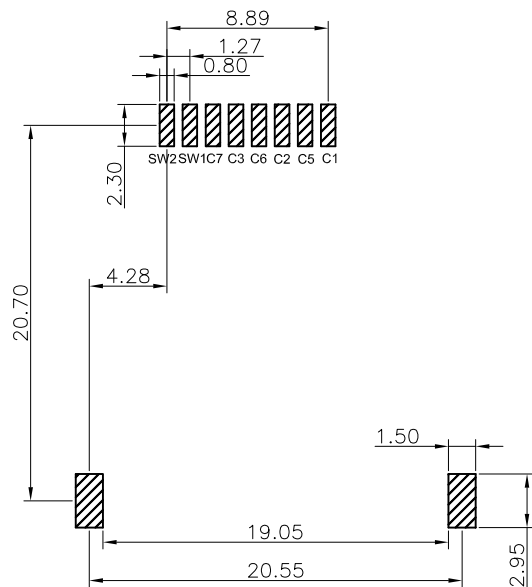

PCB 焊盘区

RECOMMENDED PCB LAYOUT

GENERAL TOLERANCE ± 0.05

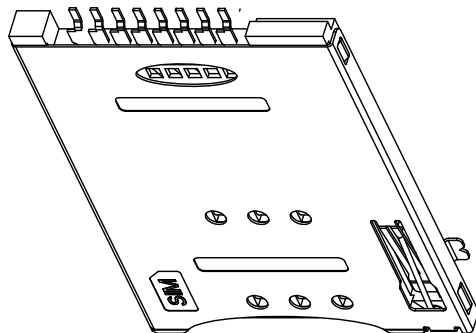

1.SPECIFICATIONS

INSULATION RESISTANCE: 500M min.AT DC 500V DC
WITHSTANDING VOLTAGE: 250V ACrms FOR 1 MINUTE
CONTACT RESISTANCE: 100M max. AT 10mA/20mV max
CURRENT RATING: 0.5A
VOLTAGE RATING: 5.0 vrms
OPERATING TEMP.RANGE:-55 C+85 C
MATING CYCLES: 5000 INSERTIONS

2.MATERIAL:

INSULATOR: H-TEMPERATURE PLASTIC,UL 94V-0,
COLOR"BLACK
TERMINAL: COPPER ALLOY,T=0.15mm
SHELL: STAINLESS STEEL,T=0.15mm

3.FINISH:

TERMINAL:50u" min NICKEL UNDERPLATED ON ALLOVER,GOLD PLATING
ON CONTACT ARER, 80u"min TIN ON SOLDER TAIL.
SHELL:50u" NICKEL UNDERPLATED ON ALLOVER, GOLD FLASH ON SOLDER
LATCH

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4



PPOJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

ORDER INFORMATION

SCP-W20EBR-06-LF
SERIES | REEL | OPEN TYPE | LEADFREE
90°SMT | EAR 20mm

DESCRIPTION: SIM CARD, 6+2PIN, PCB MOUNT, SMT, METAL SHIELD, FEMALE, (PUSH-PUSH TYPE) H=1.85 WITHOUT POST

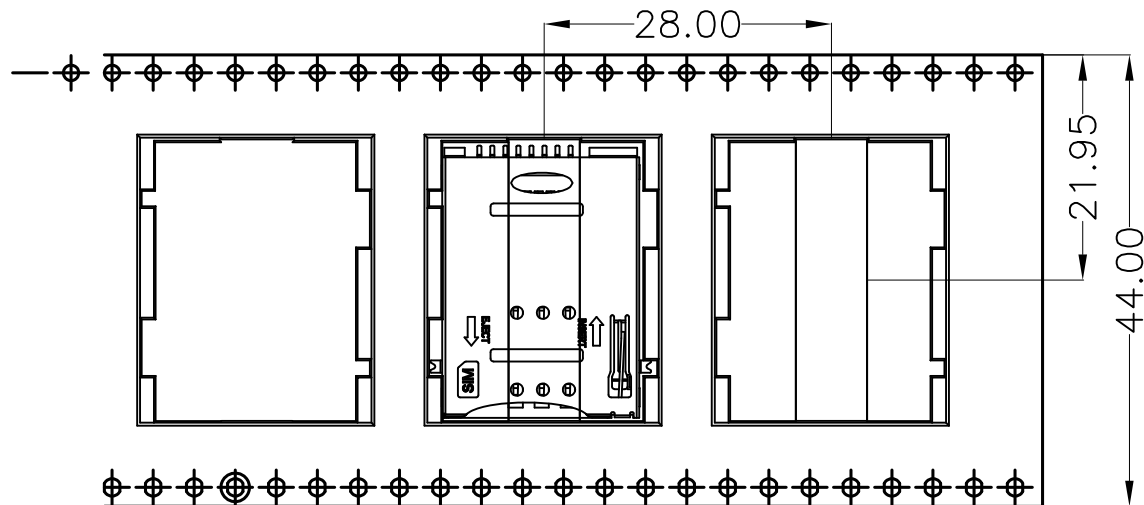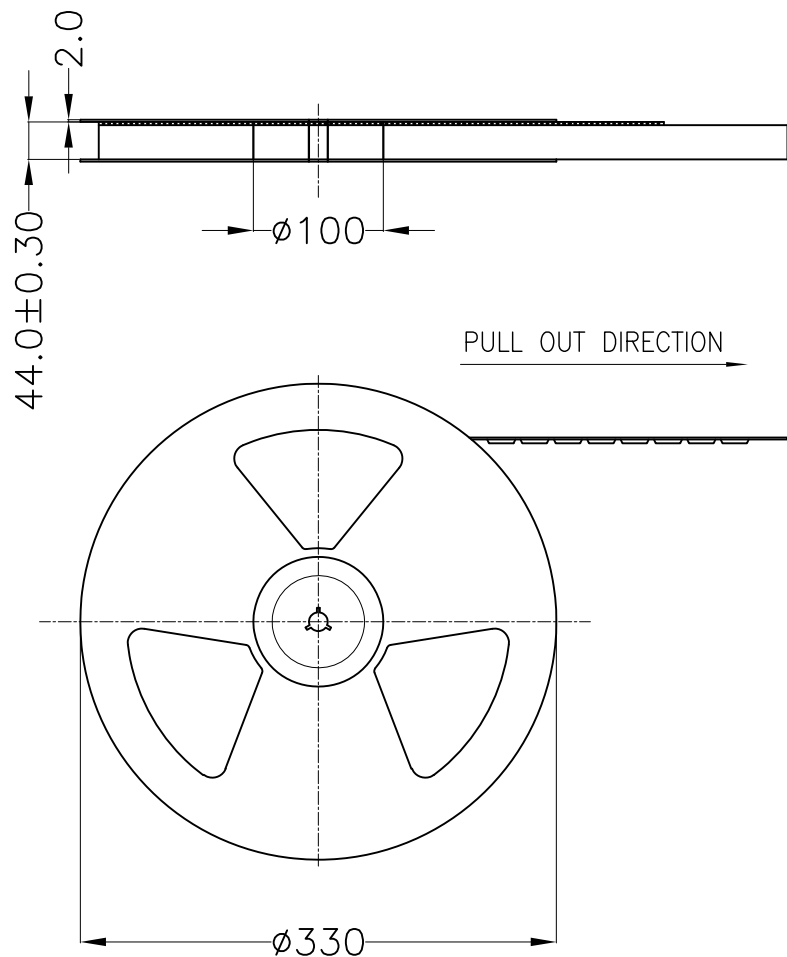

PULL OUT DIRECTION →

Note:

- 1.10 sprocket hole pitch cumulative tolerance ± 0.2
2. Carrier camber is within 1 mm in 250mm.
3. Material: Black Conductive Polystyrene Alloy
100% recyclable.
4. All dimensions meet EIA-481-B requirements.
5. Thickness: 0.3 ± 0.05 mm.
6. Component load per 13" reel: 700 pcs.
7. A box of 3 volumes, 2100PCS
8. 纸箱规格: 345*345*315, 纸箱重为 300g
9. 重量: 每盘 700PCS 重 1500g, 每Pcs 重 1.3g/Pcs

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$ 0.10
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

SCP-W20EBR-06-LF
SERIES | REEL | LEADFREE
90°SMT | REEL | 06WAY
OPEN TYPE
EAR
20mm

DESCRIPTION: SIM CARD, 6+2PIN, PCB MOUNT, SMT, METAL SHIELD, FEMALE, (PUSH-PUSH TYPE) H=1.85 WITHOUT POST