


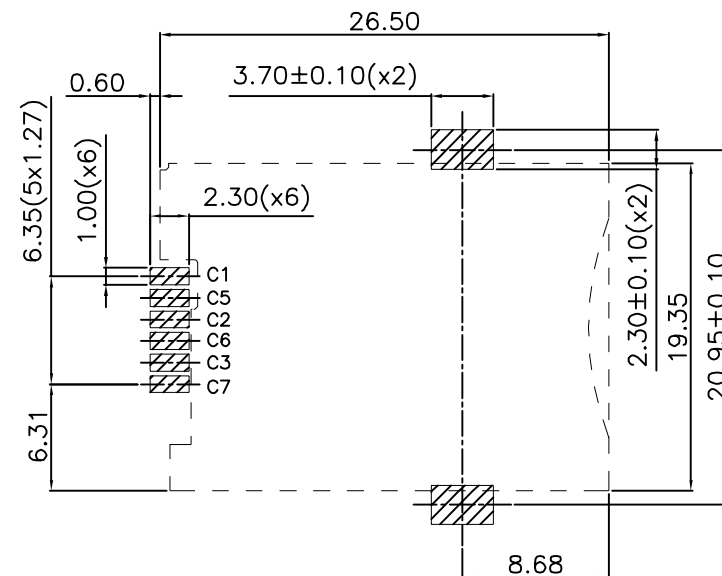
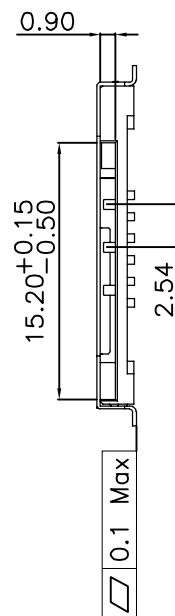


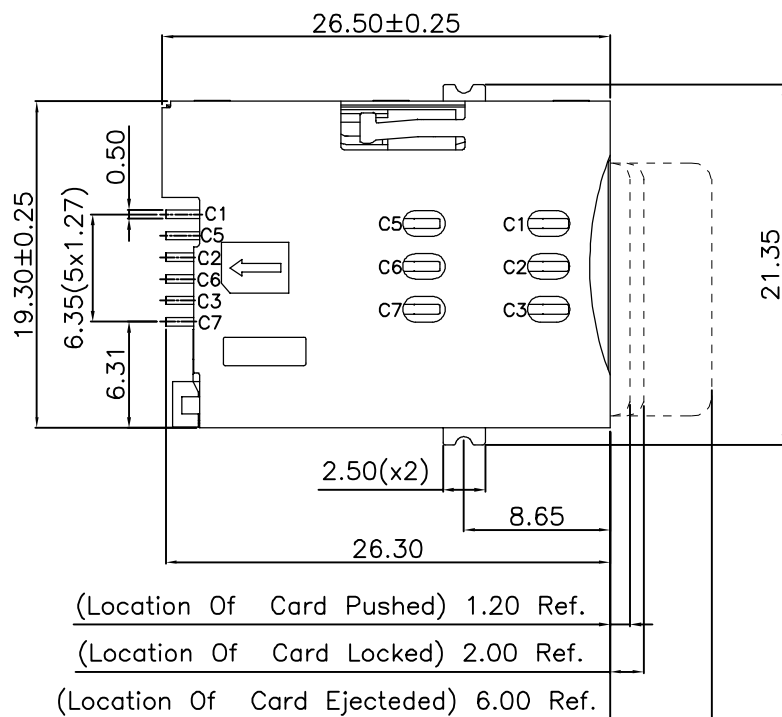

Recommended PCB Layout
 Tolerance: ± 0.05 (Component Side)



Contact No.	Assignment	Description
C1	VCC	Power Voltage
C2	RST	Reset Signal
C3	CLK	Clock Signal
C4	RFU	Reserve for future use
C5	GND	Power and Signal Ground
C6	VPP	Programming Voltage
C7	I/O	Serial Data input/output
C8	RFU	Reserve for future use



1. Materials

Housing: Hi-Temp. Plastic, UL 94V-0, Black
 Terminal: Phosphor Bronze, Gold Plated On Contact Area
 Tin Plated On Solder Tails
 Shell: Stainless Steel SMT Solder Area Gold Plated

2. Specification

Current Rating: 1 Amp Max
 Dielectric Withstanding Voltage: 500V AC For One Minute.
 Contact Resistance: 30 m Ohms Max
 Insulation Resistance: 1000 M Ohms Min At DC 500V
 Operation Temperature: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
 .X $\pm$ 0.25
 .XX $\pm$ 0.20
 .XXX $\pm$ 0.10
 ANG $\pm$ 2°

PPOJECTION

照片框

ORDER INFORMATION

SCP-W20EX-06-LF
 SERIES 90°SMT
 LEADFREE 06WAY
 NON SWITCH
 EAR 20.95mm

DESCRIPTION: Sim Card, H: 2.20, PCB Mount, SMT Without Post