

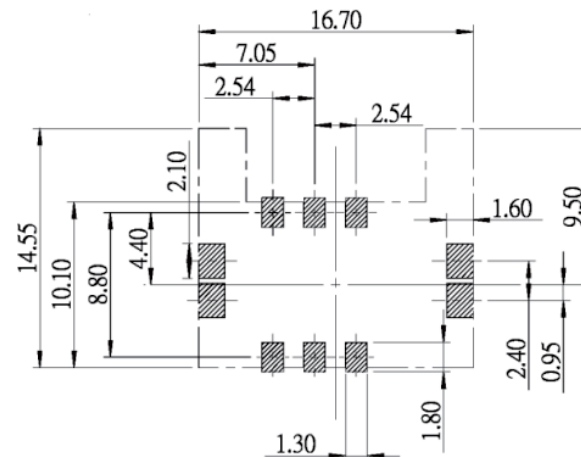
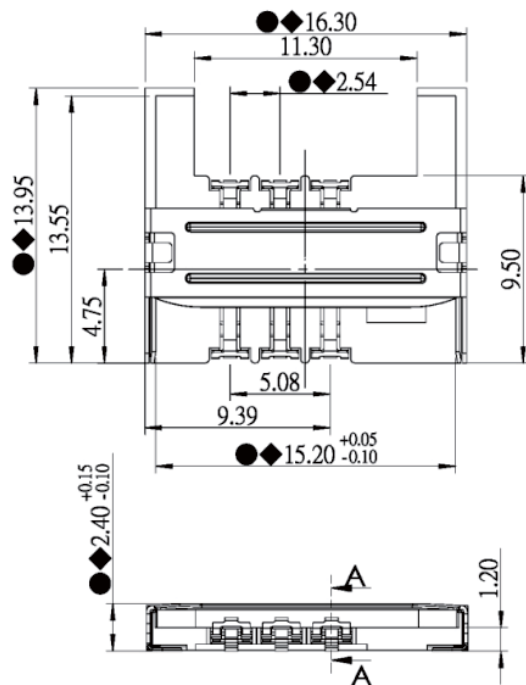
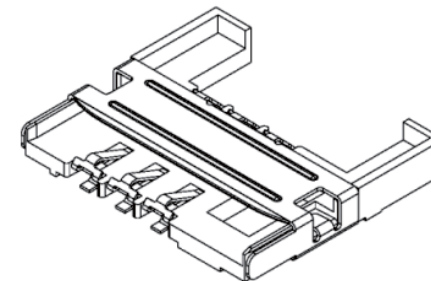


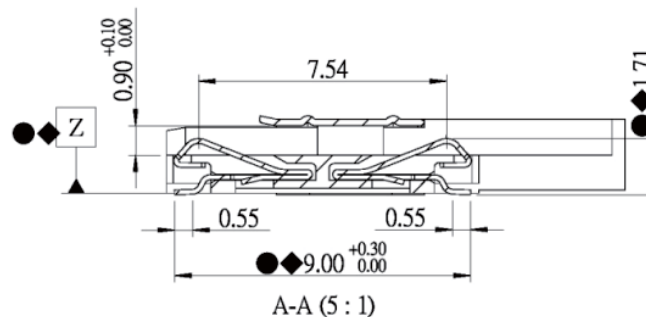

PCB PATTERN LAYOUT
GENERAL TOLERANCE : ± 0.05

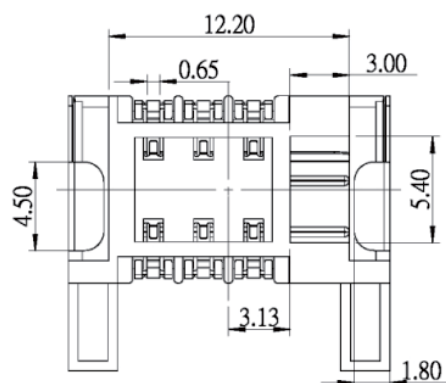

NOTE:

1. SOLDER TAIL TO BE WITHIN 0.05 UPWARD AND 0.2 DOWNWARD FROM Z-DATUM PLACE, AND COPLANALITY OF SOLDER TAILS TO BE WITHIN 0.10 MAX. MEASUREMENT POINT IS SOLDER TAILS TIP.
2. INSPECTION SYMBOL:
 ● : MANUFACTURER INSPECTION
 ◆ : Q.C INSPECTION

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$

.X, $\pm$

.XX, $\pm$

.XXX, $\pm$

ANG, $\pm$

PPOJECTION

照片框

ORDER INFORMATION

SCT-W0824X-06-LF
 SERIES | 06WAY | LEADFREE
 | NON POST
 | HIGH 2.4mm
 | PAD TO PAD 8.80mm
 | 90°SMT

DESCRIPTION: