
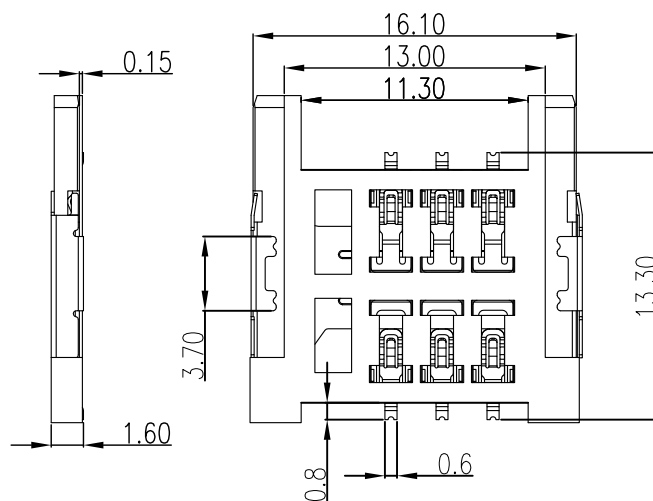
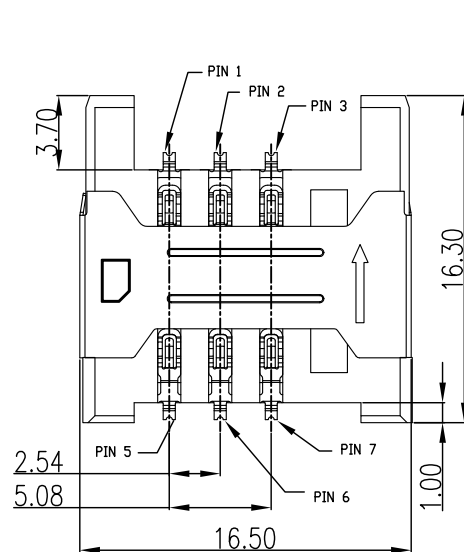


TABLE A

| PIN NO. | PIN NAME                |
|---------|-------------------------|
| P1      | Supply Voltage Vcc      |
| P2      | Reset (RST)             |
| P3      | Clock (CLK)             |
| P4      | N/A                     |
| P5      | Ground                  |
| P6      | Programming Voltage Vpp |
| P7      | I/O                     |
| P8      | N/A                     |

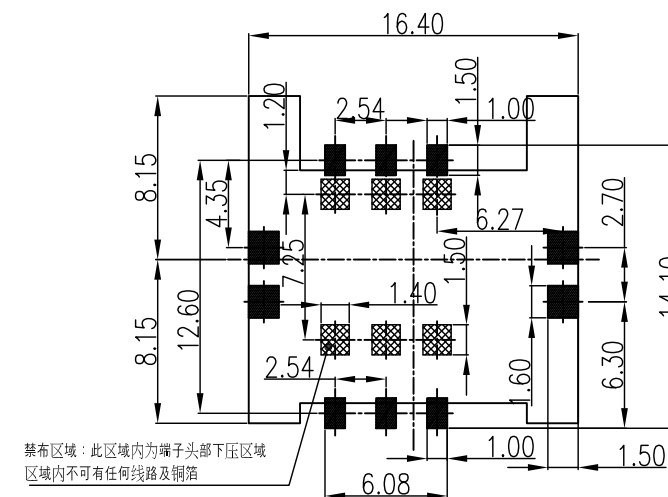

### Recommended PCB Layout

### MATERIALS:

HOUSING: HI-TEMP. PLASTIC LCP(UL 94V-0), BLACK  
SHELL:STAINLESS STEEL NICKEL PLATED OVER ALL  
GOLD PLATED SOLDER AREA

TERMINAL: COPPER ALLOY, NICKEL UNDER PLATED  
GOLD PLATED CONTACT AREA  
TIN PLATED SOLDER AREA

### SPECIFICATION:

CURRENT RATING: 1.0 AMP MAX  
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE  
CONTACT RESISTANCE: 50m OHMS MAX  
INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V  
OPERATION TEMPERATURE: -40°C+85°C

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
.X ± 0.30  
.XX ± 0.20  
.XXX ± 0.10  
ANG ±

照片框

### ORDER INFORMATION

SCT-W1116X-06-LF  
SERIES  
LEADFREE  
06WAY  
NON POST  
HIGH 1.6mm  
PAD TO PAD 11.8mm  
90°SMT

DESCRIPTION: SIM CARD, 6PIN, PCB MOUNT, SMT, FEMALE, (H=1.5mm)