

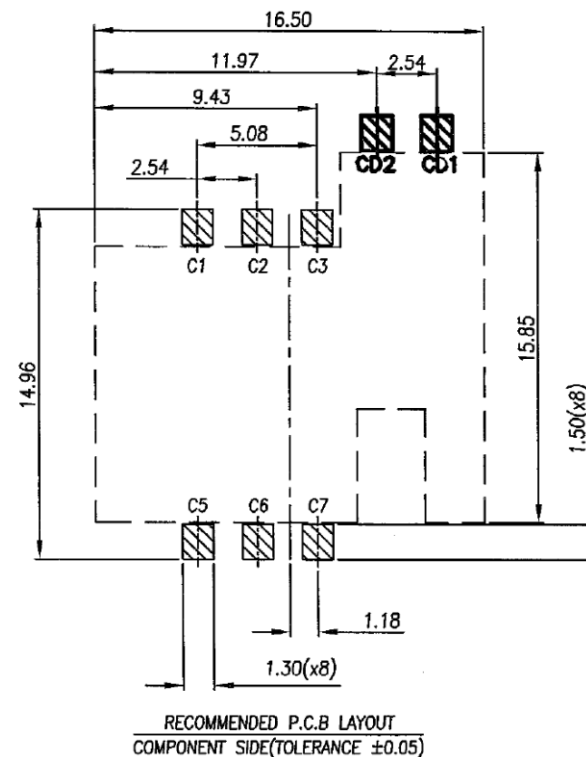
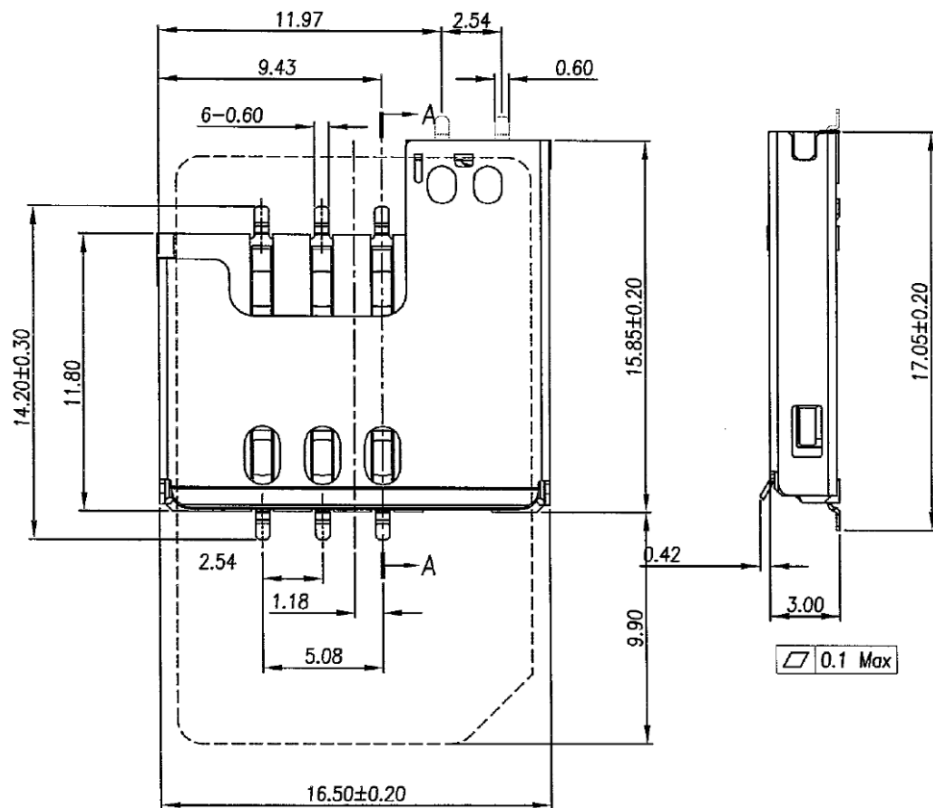


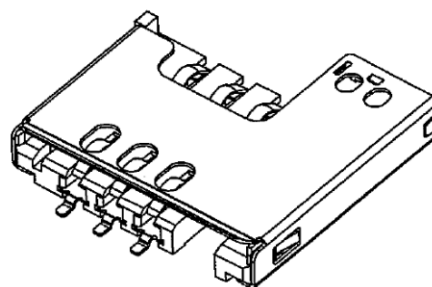

Notes:  
 Material: Phosphor Bronze(C5191-H)  
 SIM Card Connector,With  
 Housing: Lcp UL 94V-0 Black  
 On The Cover Sus 304  
 FINISH : Terminal Half Gold Fog Tin Plating  
 The Terminal Plating Nickel Is Minimal 50μ"  
 Gold plated contact poin3μ"  
 Tin Welding Point Is Minimal 100μ"  
 Specifications:  
 Voltage Current Rating: 1A. 50V AC  
 Insulation Resistance: 1000Mohm Min  
 Contact Withstanding Voltage:  
 AC 500V For 1 Minute  
 Temperteure Rating: -40° To +85°  
 Durability: 100000 Cycles Min  
 IR Re-Flow:260°C 15Sec Max

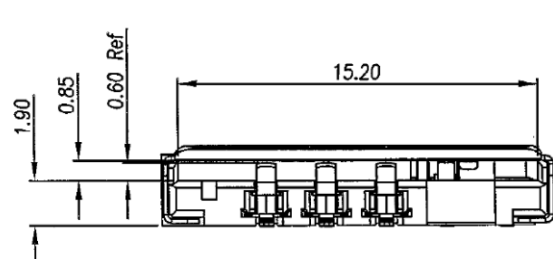

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±  
 .X ± 0.25  
 .XX ± 0.15  
 .XXX ± 0.10  
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SCT-W1330XB-06-LF  
 SERIES LEADFREE  
 06 WAY  
 OPEN SWITCH  
 NON POST  
 HIGH 3.0mm  
 PAD TO PAD 13.46mm

DESCRIPTION: