

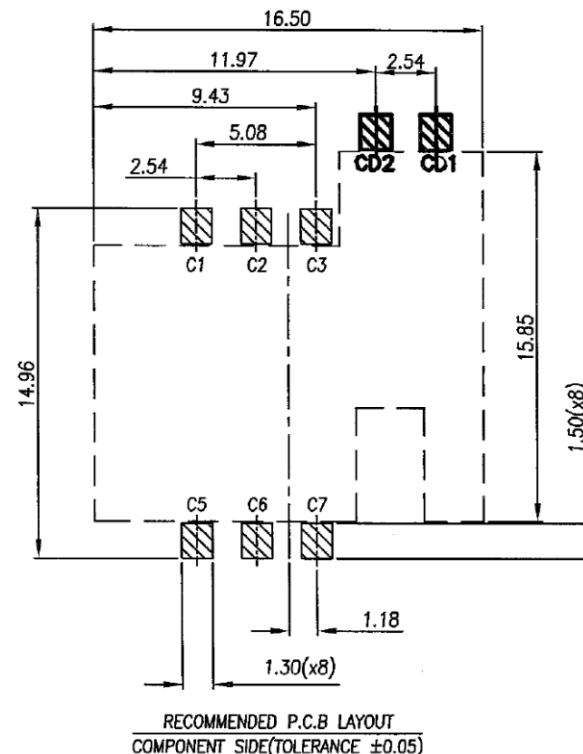
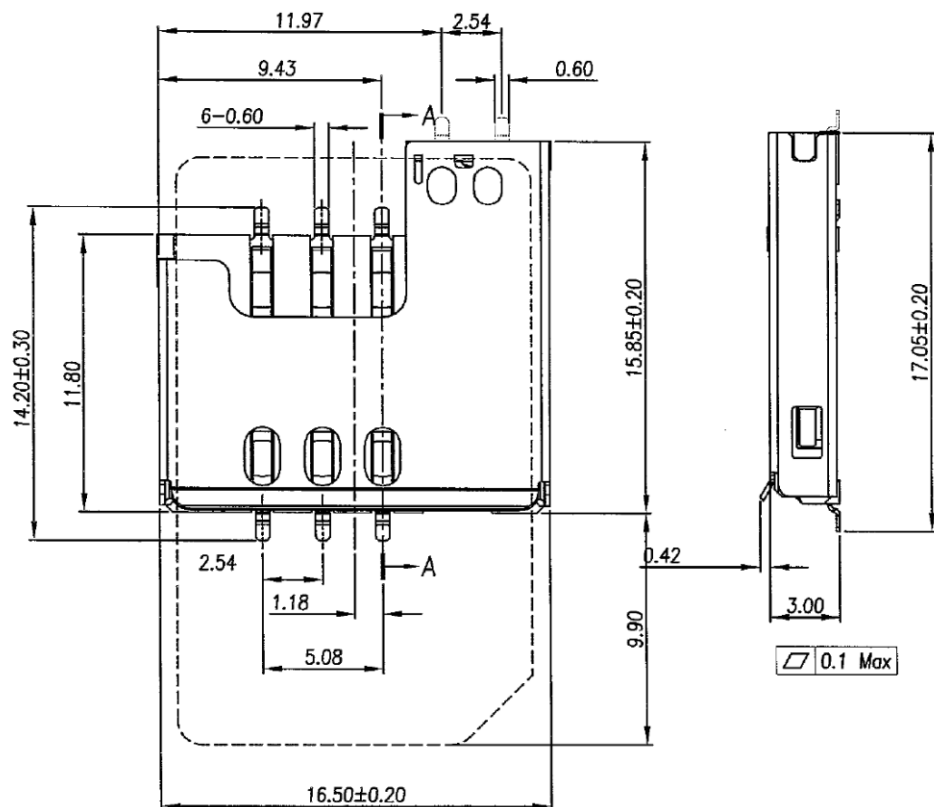


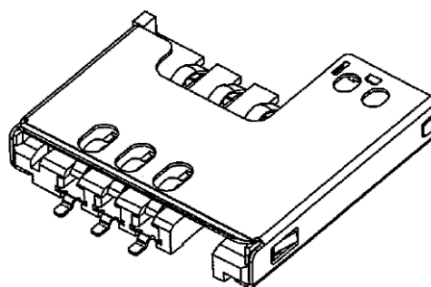

Notes:
 Material: Phosphor Bronze(C5191-H)
 SIM Card Connector,With
 Housing: Lcp UL 94V-0 Black
 On The Cover Sus 304
 FINISH : Terminal Half Gold Fog Tin Plating
 The Terminal Plating Nickel Is Minimal 50μ"
 Gold plated contact poin3μ"
 Tin Welding Point Is Minimal 100μ"
 Specifications:
 Voltage Current Rating: 1A. 50V AC
 Insulation Resistance: 1000Mohm Min
 Contact Withstanding Voltage:
 AC 500V For 1 Minute
 Temperteure Rating: -40° To +85°
 Durability: 100000 Cycles Min
 IR Re-Flow:260°C 15Sec Max

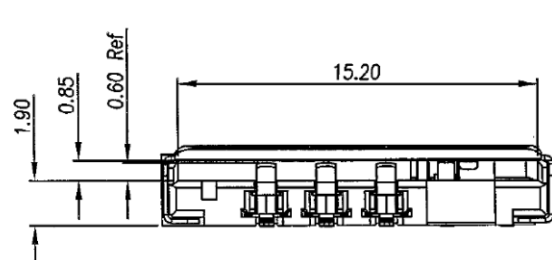

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.25
 .XX ± 0.15
 .XXX ± 0.10
 ANG ±

PPOJECTION


照片框

ORDER INFORMATION


SCT-W1330XBR-06-LF
 SERIES | | | | | LEADFREE
 | | | | | 06 WAY
 | | | | | REEL
 | | | | | OPEN SWITCH
 90°SMT
 PAD TO PAD 13.46mm
 HIGH 3.0mm

DESCRIPTION:

Embossed Tape Carrier Diagram
Carrier Dimensions Diagram

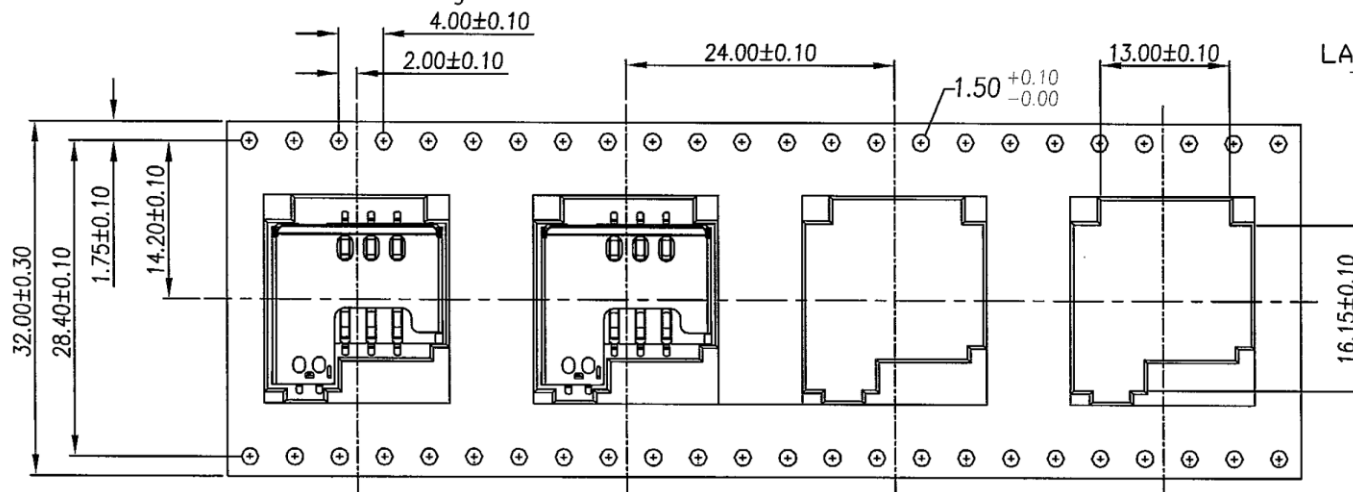

Reel Form Diagram

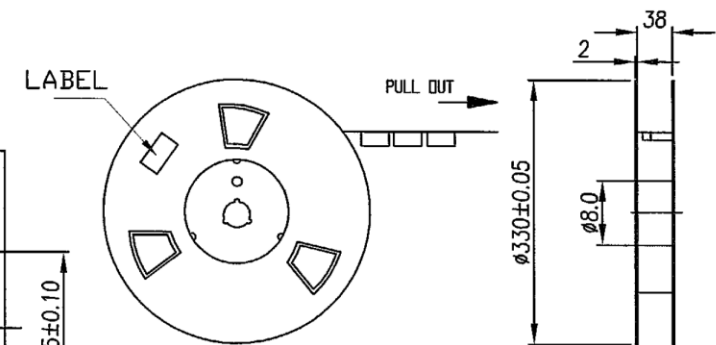

G.W.:1.01KGS



Q'ty:700Pcs Pcs/Reel

N.W.:4.37 KG

G.W.:8.90 KG

Q'ty:5600Pcs per carton(8 Reels set in order)

Meas:35.00L X 35.00W X31.50H cm

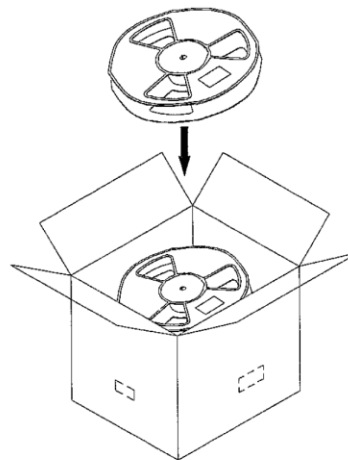

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SCT-W1330XBR-06-LF
SERIES
90°SMT
PAD TO PAD 13.46mm
LEADFREE
06 WAY
REEL
OPEN SWITCH
NON POST
HIGH 3.0mm

DESCRIPTION: