

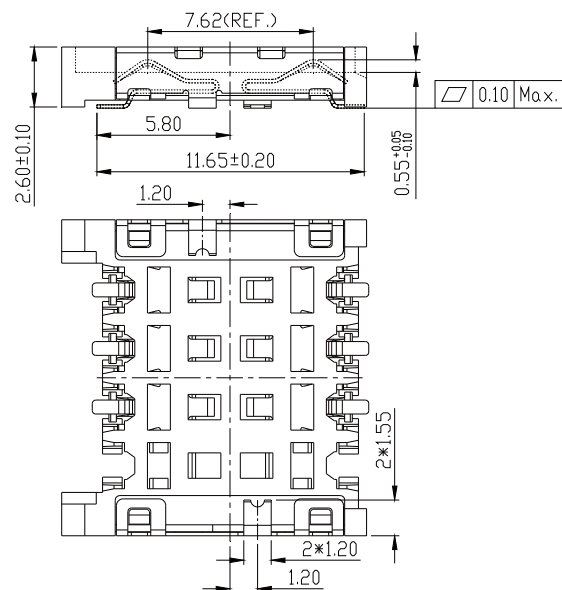


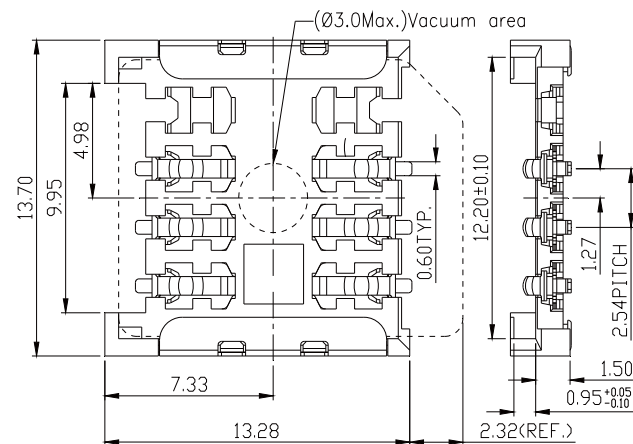

Unit: mm; Tolerances: ± 0.15 mm

Figure 5.1 Mechanical outline dimension (6 pins)

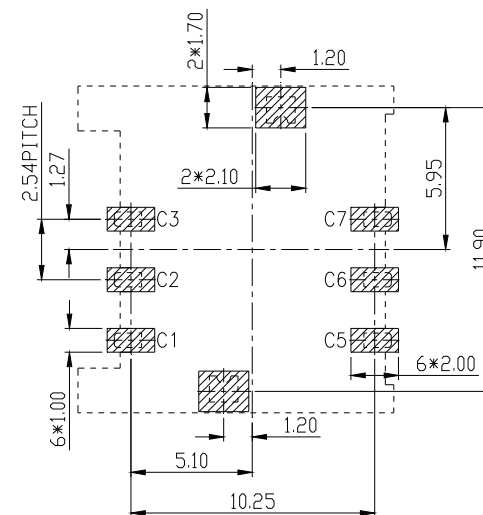

Unit: mm; Tolerances: ± 0.05 mm

Figure 5.2 Reference dimension for PCB layout (6 pins)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$

.X, $\pm$

.XX, $\pm$

.XXX, $\pm$

ANG, $\pm$

照片框

ORDER INFORMATION

SCU-W1026XMR-06-LF

SERIES

90°SMT

PAD TO PAD 10.0mm

LEADFREE

06WAY


REEL

METAL


NON POST

BODY HIGH 2.6mm

DESCRIPTION:

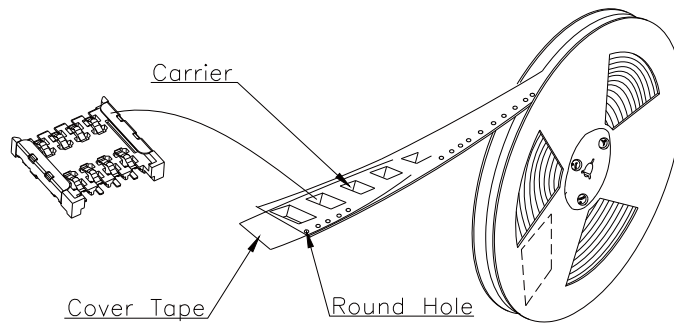

N. W. : 0.27 KGS
 G. W. : 0.82 KGS
 Q Y: 700 PCs per reel
 Meas. : dia. 33 CM, W2.4 CM

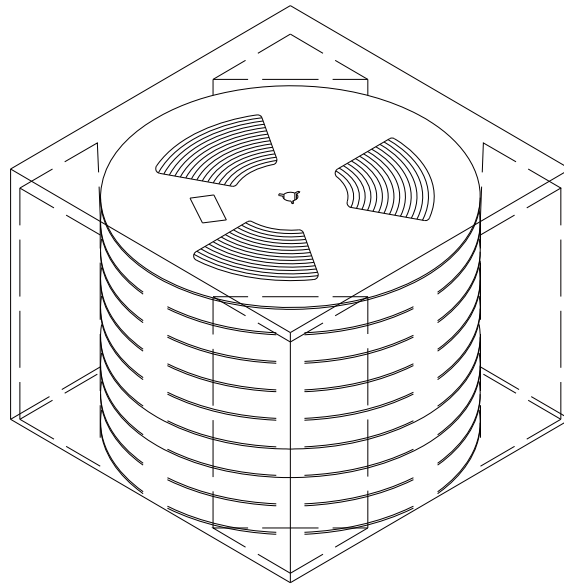

N. W. : 2.7 KGS
 G. W. : 9.4 KGS
 Q Y: 7,000 PCs per carton
 (10 reels set in order)
 Meas. : 35.0L x 35.0W x 32.5H CM

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SCU-W1026XMR-06-LF
 SERIES REEL LEADFREE
 06WAY
 90°SMT METAL
 PAD TO PAD 10.0mm NON POST
 BODY HIGH 2.6mm

DESCRIPTION: