


MATERIALS

1. HOUSING : HI.-TEMP.PLASTIC(UL 94V-0).BLACK
2. TERMINAL : COPPER ALLOY.(t=0.15mm)
GOLD PLATED OVER NICKEL
3. FORK : COPPER ALLOY. (t=0.20mm)
TIN PLATED OVER NICKEL

SPECIFICATION

1. CURRENT RATING : 1.0 A MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE :
500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M Ω MIN. AT 500V DC.
4. CONTACT RESISTANCE : 30m Ω MAX.
5. OPERATING TEMPERATURE : -40°C TO +85°C.

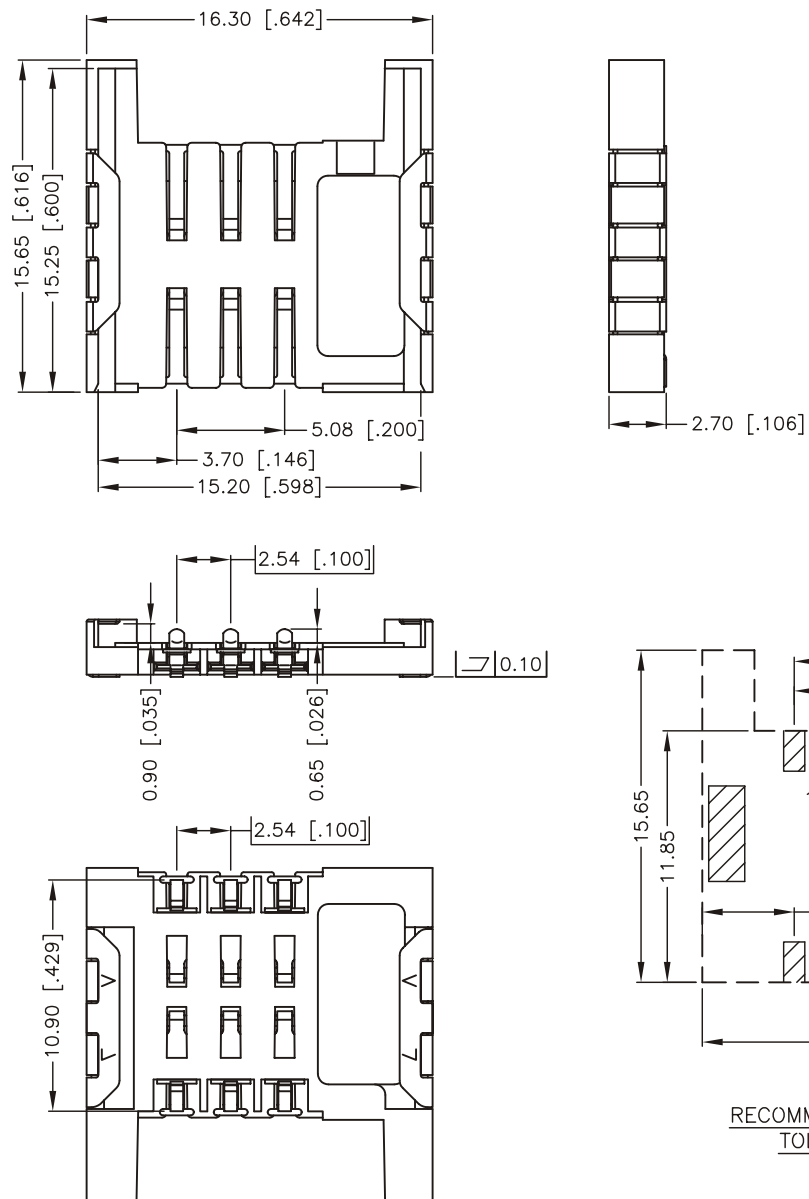

RECOMMEND P.C.B. LAYOUT
TOLERANCE ± 0.05
TOP VIEW

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X ± 0.38
.XX ± 0.25
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

SCU-W1027X-06-LF

SERIES

LEADFREE

06WAY

NON POST

BODY HIGH 2.7mm

PAD TO PAD 10.0mm

90°SMT

DESCRIPTION: SIM CARD 2.54PH