
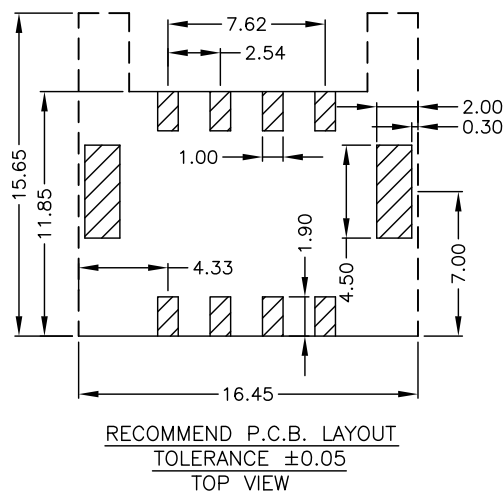
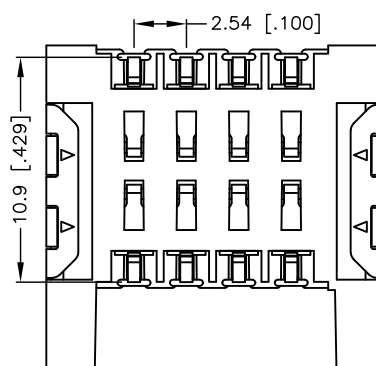
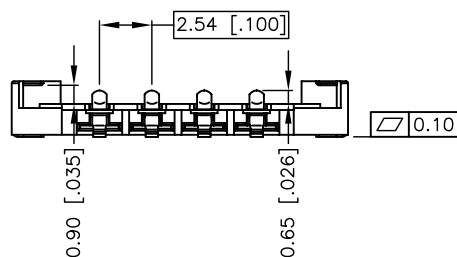
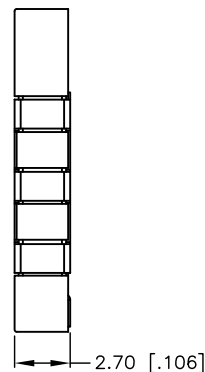


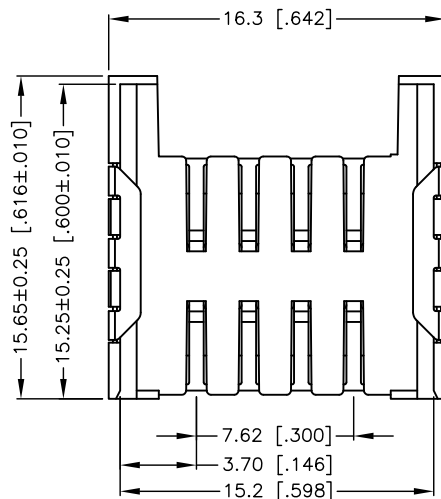

MATERIALS

1. HOUSING : HI.-TEMP.PLASTIC(UL 94V-0).BLACK
2. TERMINAL : COPPER ALLOY.($t=0.15\text{mm}$)
GOLD PLATED OVER NICKEL
3. FORK : COPPER ALLOY. ($t=0.20\text{mm}$)
TIN PLATED OVER NICKEL

SPECIFICATION

1. CURRENT RATING : 1.0 A MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE :
500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : $1000\text{M}\Omega$ MIN. AT 500V DC.
4. CONTACT RESISTANCE : $30\text{m}\Omega$ MAX.
5. OPERATING TEMPERATURE : -40°C TO $+85^{\circ}\text{C}$.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

SCU-W1027X-08-LF
SERIES | | | | LEADFREE
| | | | 08WAY
| | | | NON POST
90°SMT | | | | BODY HIGH 2.7mm
| | | | PAD TO PAD 10.0mm

DESCRIPTION: SIM CARD 8P 2.54PH