

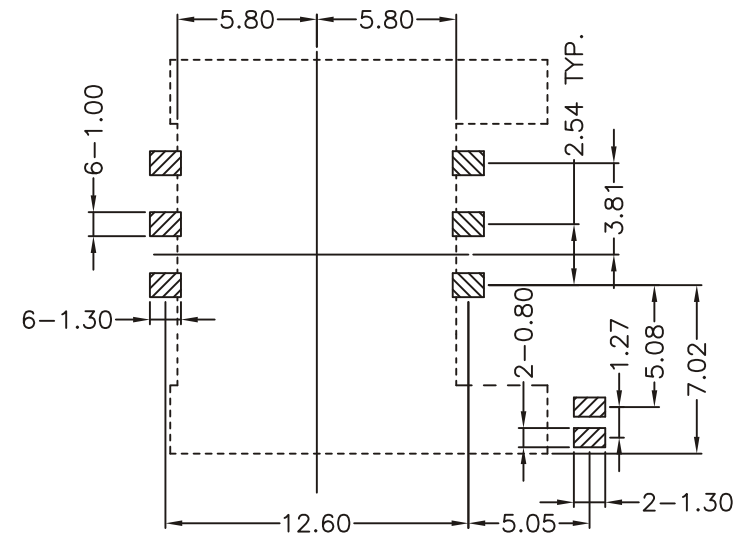

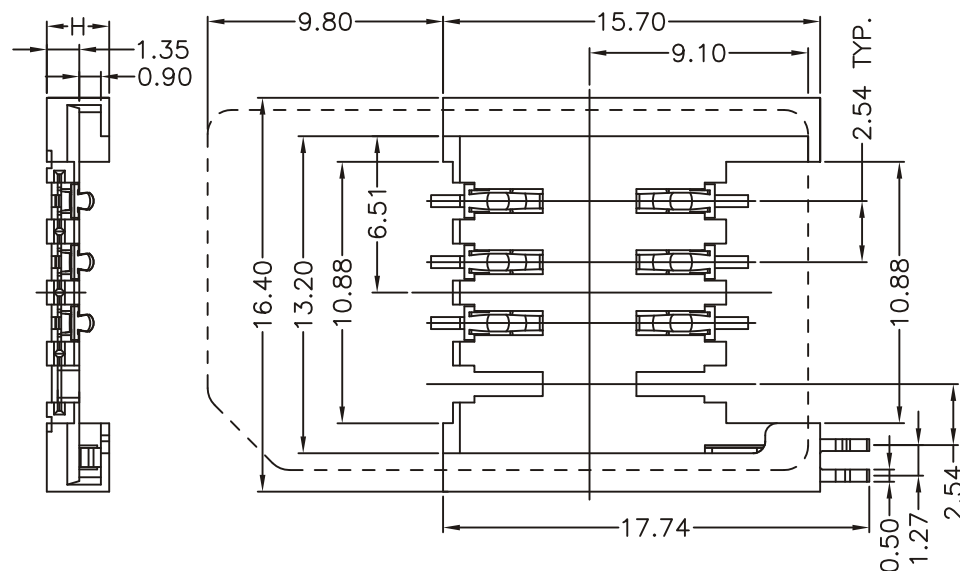




P.C.B LAYOUT
TOP VIEW ± 0.05

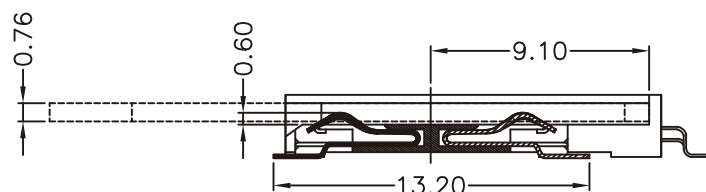

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
TERMINAL: PHOSPHOR BRONZE, GOLD PLATED

SPECIFICATION

CURRENT RATING: 0.5 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

SCU-W12xxXBR-06-LF
SERIES T T T T T LEADFREE
90°SMT 06WAY
REEL
OPEN SWITCH
NON POST
PAD TO PAD 12.60mm 24:HIGH 2.4mm
26:HIGH 2.6mm

DESCRIPTION: SIM CARD, 6PIN, PCB MOUNT, SMT, FEMALE, WITH SWITCH

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

X. ± 0.30

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE



.XXX ± 0.10

ANG $\pm 1^{\circ}$

SIZE A4


PPOJECTION

TAPE REEL PACKAGE

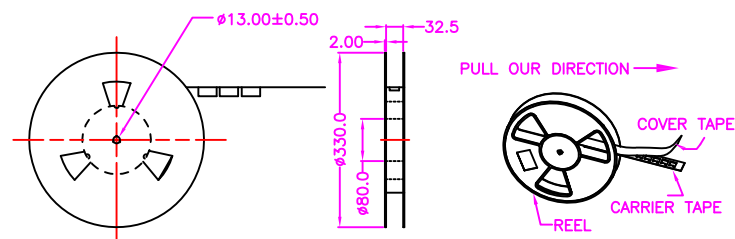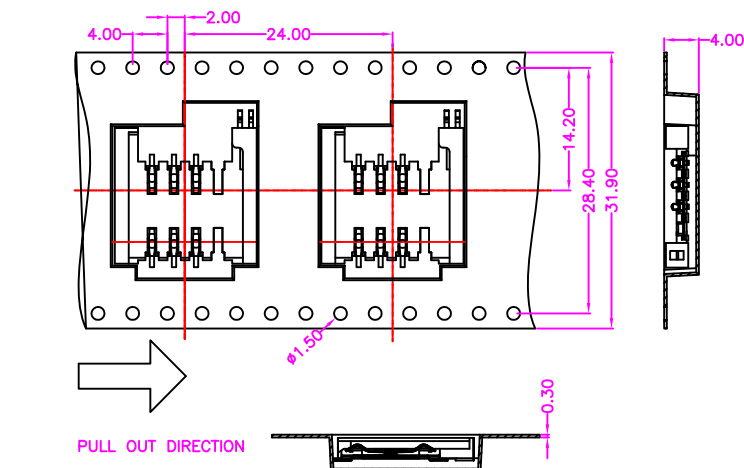


G.W.: 0.70 KGS
Q'TY: 800Pcs PER REEL


G.W.: 6.20 KGS
Q'TY: 6400Pcs PER CARTON (8 REELS SET IN ORDER)
MEANS: 35.00Lx35.00Wx31.50H cm




TUBE PACKAGE



Q'TY: 25Pcs PER TUBE
MEANS: 46.00Lx2.00Wx0.44H cm



N.W.: 1.30 KGS
G.W.: 1.40 KGS
Q'TY: 1000Pcs PER BOX (40 TUBE SET IN ORDER)
MEANS: 47.00Lx9.40Wx6.10H cm



N.W.: 11.2 KGS
G.W.: 12.2 KGS
Q'TY: 9000Pcs PER CARTON (9 BOXES SET IN ORDER)
MEANS: 50.50Lx30.80Wx21.00H cm

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

SCU-W12xxXBR-06-LF
SERIES T T T T T LEADFREE
06WAY
REEL
OPEN SWITCH
NON POST
90°SMT
PAD TO PAD 12.60mm 24:HIGH 2.4mm
26:HIGH 2.6mm

DESCRIPTION:SIM CARD, 6PIN, PCB MOUNT, SMT, FEMALE , WITH SWITCH, PACKAGE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$

.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$