


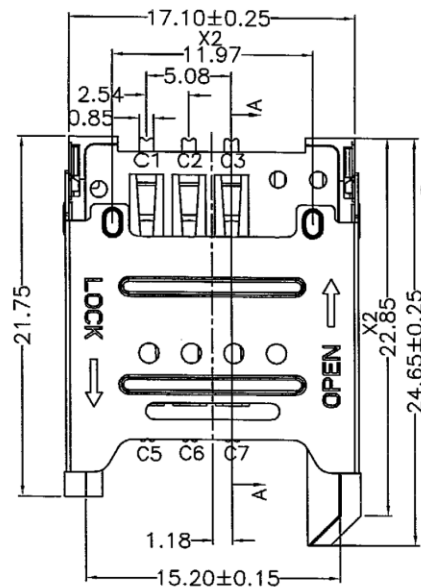
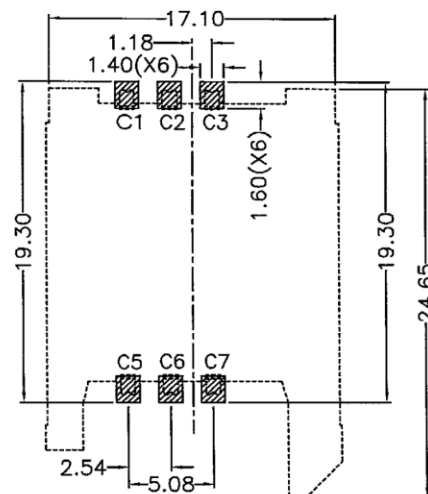



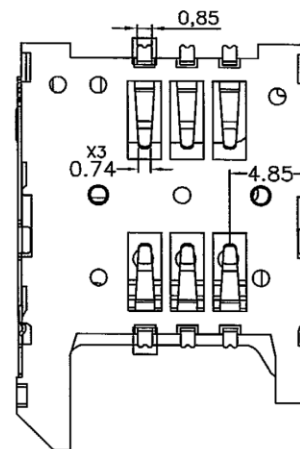

0.05
0.1Max
All the soldertails

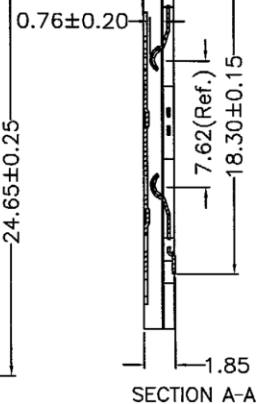

RECOMMENDED P.C.B LAYOUT
COMPONENT SIDE(TOLERANCE ± 0.05)



TECHNICAL CHARACTERISTICS

1.General Characteristics

Dimensions: 24.65LX17.10WX1.85H mm

Weight: Approx0.90 $\pm$ 0.2g

Durability: 5,000 cycles min.

2.Electrical Characteristics

Contact resistance: 50m Ω typical,100m Ω max

Insulation resistance: >1000M Ω /500V DC

3.Solderability

IR reflow: 260°C,10sec.Max

Manual soldering: 370°C,3sec.Max

4.Environmental Characteristics

Operating temperature: -40°C~+85°C

Operating humidity: 10%~+95%RH

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.25
.XX $\pm$ 0.15
.XXX $\pm$ 0.10
ANG $\pm$ 1°

照片框

ORDER INFORMATION

SCV-W1718X-06-LF
SERIES | LEADFREE
| 06 WAY
| NON POST
90°SMT | HIGH 1.85mm
PAD TO PAD 17.7mm

DESCRIPTION: