
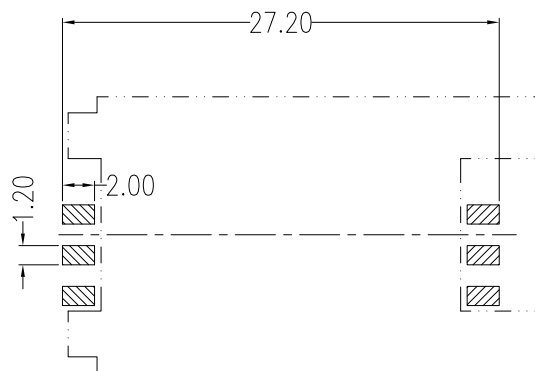
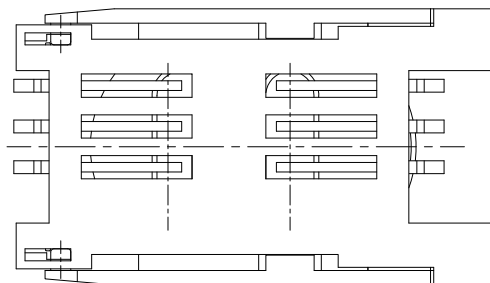
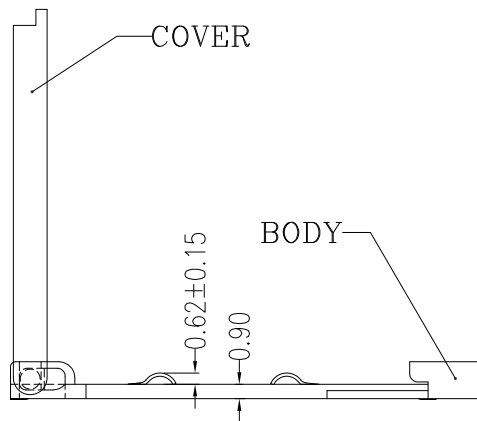


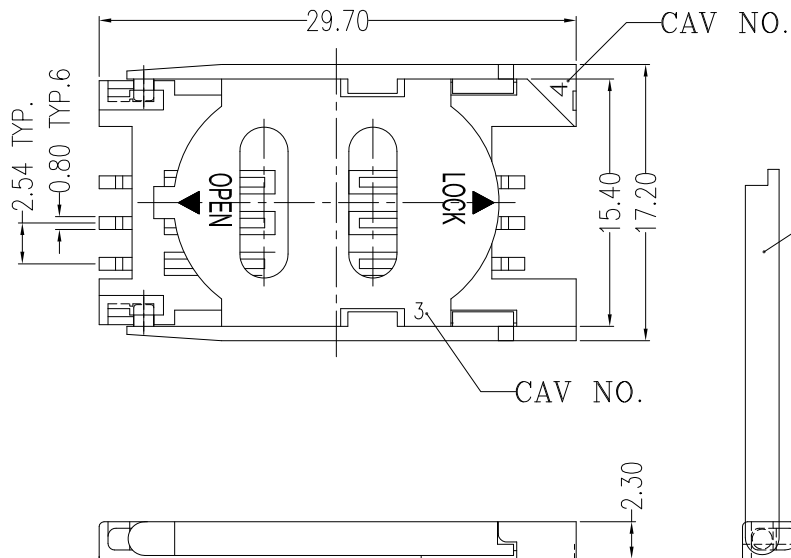

RECOMMEND P.C.B. LAYOUT
TOP VIEW

NOTES

*Material:

- 1.Body: PPS UL 94V-0 Rated, Color:Black;
- 2.Cover: LCP UL 94V-0 Rated, Color:Black;
- 3.Contact: Phosphor Bronze;
- 4.Contact Plating: Gold Plating Over Nickel on Contact Area, Tin Plating on Solder Tail.

*Specification:

- 1.Current Rating: 0.5 AMP. Max.;
- 2.Dielectric Withstanding Voltage: 500V AC R.M.S For One Minute;
- 3.Insulation Resistance: 1000 M Ohms Min. AT 500V AC;
- 4.Contact Resistance: 30 M Ohms Max.;
- 5.Operating Temperature: -25°C to +85°C;
- 6.Processing Temp: 245°C for 30~60 Seconds Max.;
- 7.Durability: 5000 Cycles.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.20
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SCV-W2523XS30-06-LF

SERIES 90°SMT
LEADFREE
06WAY
SEMI GOLD 30u"
NON POST
BODY HIGH 2.3mm
PAD TO PAD 25.2mm

DESCRIPTION: Sim Card 6Pin Without Post