


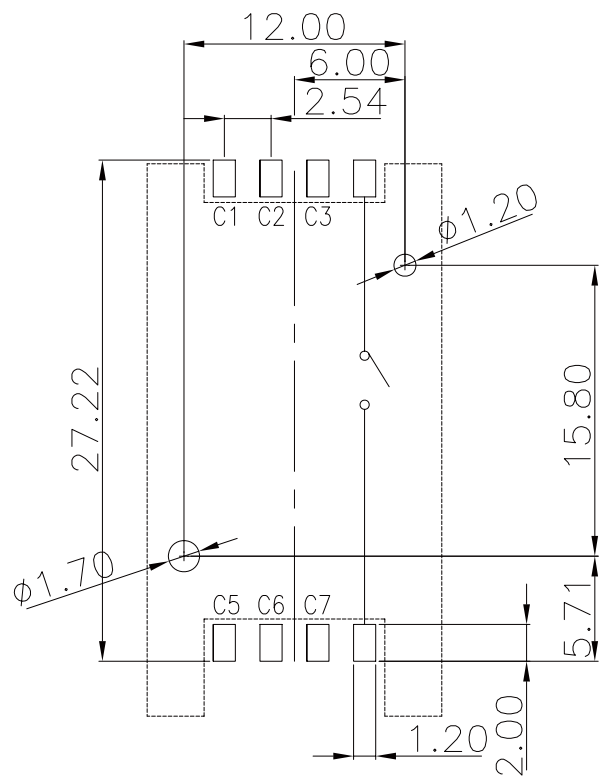


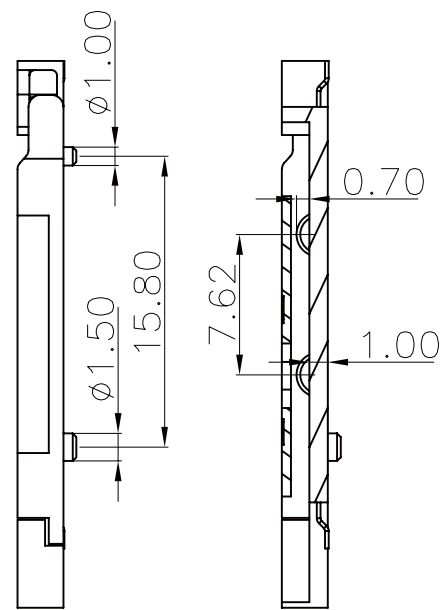


RECOMMENDED PCB LAYOUT

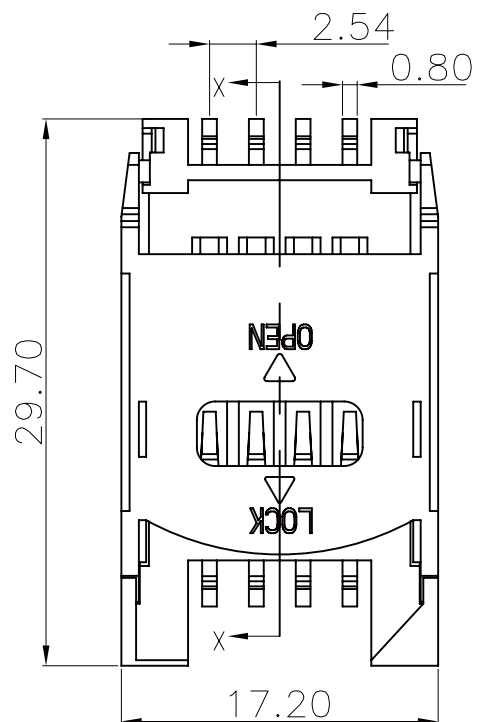

SECTION:X-X

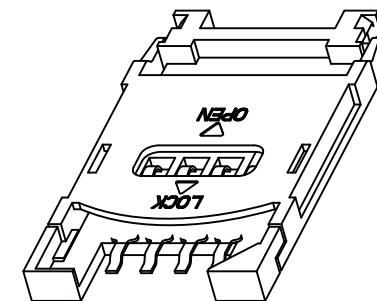

PART NAME	Q'TY	Material
HOUSING	1	LCP+30%GF
COVER	1	LCP+30%GF
CONTACT	8	C5210R-EH,GOLD 5u'

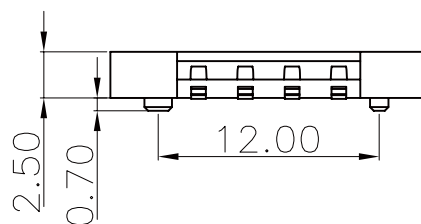

NOTE:

1.GENERAL CHARACTERISTICS

DURABILITY:5000 CYCLES.
OPERATIO TEMPERATURE:-25°C TO +85°C.

2.ELECTRICAL CHARACTERISTICS

CONTACT RESISTANCE:30M OHMS MAX.
INSULATION RESISTANCE:>1000M OHMS MIN /500V DC.
RATED CURRENT:0.5A MAX.
WITHSTANDING DIELECTRIC VOLTAGE:500V AC R.M.S FOR 1MINUTE.

3.SOLDERABILITY

MAX PROCESSING TEMP:260°C FOR 10 SEC.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4

PPOJECTION

TOLERANCES ARE


X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

SCV-W2525PBR-06-LF
SERIES | | | | | LEADFREE
| | | | | 06WAY
| | | | | REEL
| | | | | OPEN SWITCH
| | | | | WITH LOCATING PEG
PAD TO PAD 25.54mm BODY HIGH 2.5mm

DESCRIPTION: SIM Card Socket Hinge Type with Switch Function

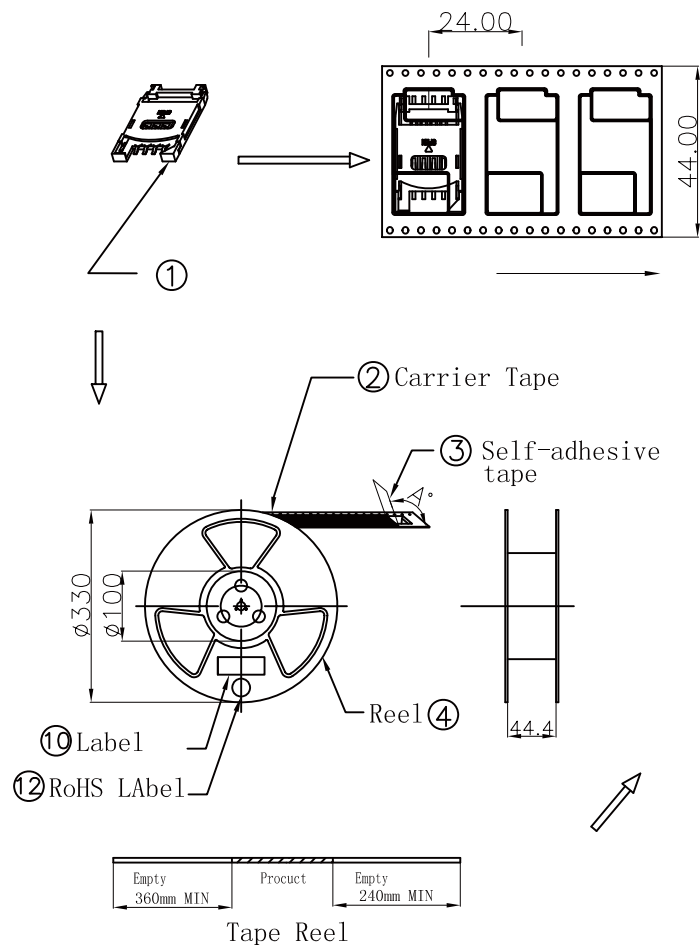

Note:

1. 500PCS/Reel 3500PCS/7Reel/Carton

2. N.W=3.5Kg G.W=8.18Kg

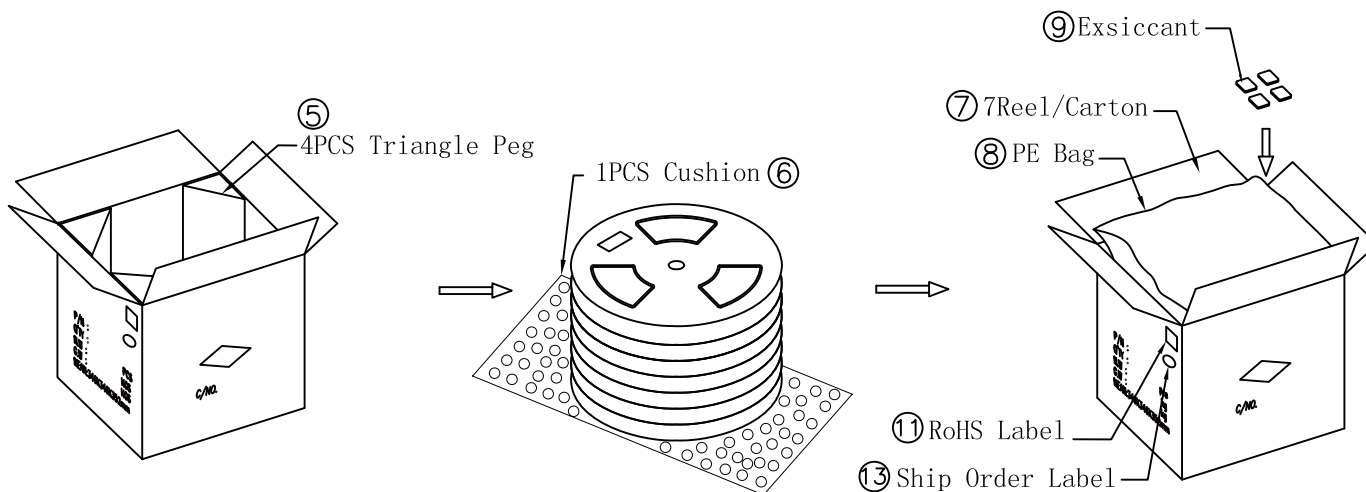


TABLE:

⑬	RoHS Label	1	PCS	
⑫	RoHS Label	7	PCS	
⑪	Ship Order Label	1	PCS	
⑩	Label	7	PCS	
⑨	Exsiccant	4	bag	L800*W750mm
⑧	PE Bag	1	PCS	
⑦	Exterior Carton	1	PCS	K=K, L346*W346*H352mm
⑥	Cushion	1	PCS	1*100
⑤	Triangle Peg	4	PCS	L330*H345mm
④	Reel	7	PCS	330*100mm, W=45mm
③	Self-adhesive tape	12.7	m	W=37.5, 12.7M/REEL
②	Carrier Tape	12.6	m	W=44mm, T=0.35mm, 12.6M/REEL
①	SIM Card Hinge type socket with card detect switch		UNIT	

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

SCV-W2525PBR-06-LF

SERIES
90°SMT
PAD TO PAD 25.54mm
LEADFREE
06WAY
REEL
OPEN SWITCH
WITH LOCATING PEG
BODY HIGH 2.5mm

DESCRIPTION: SIM Card Socket Hinge Type with Switch Function Reel