
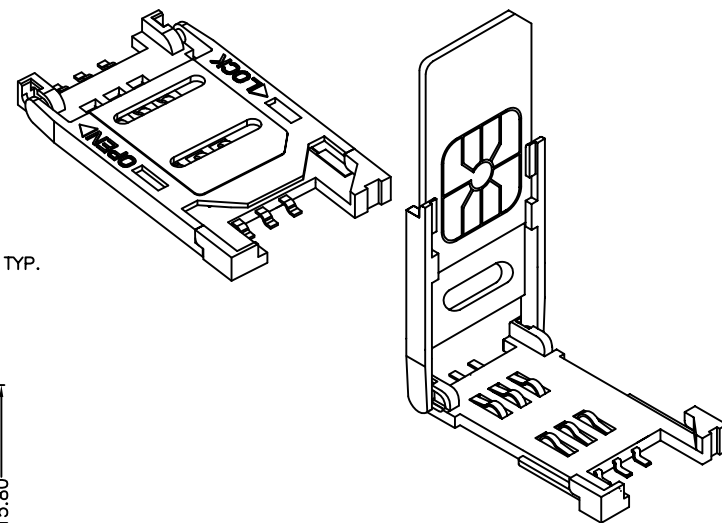


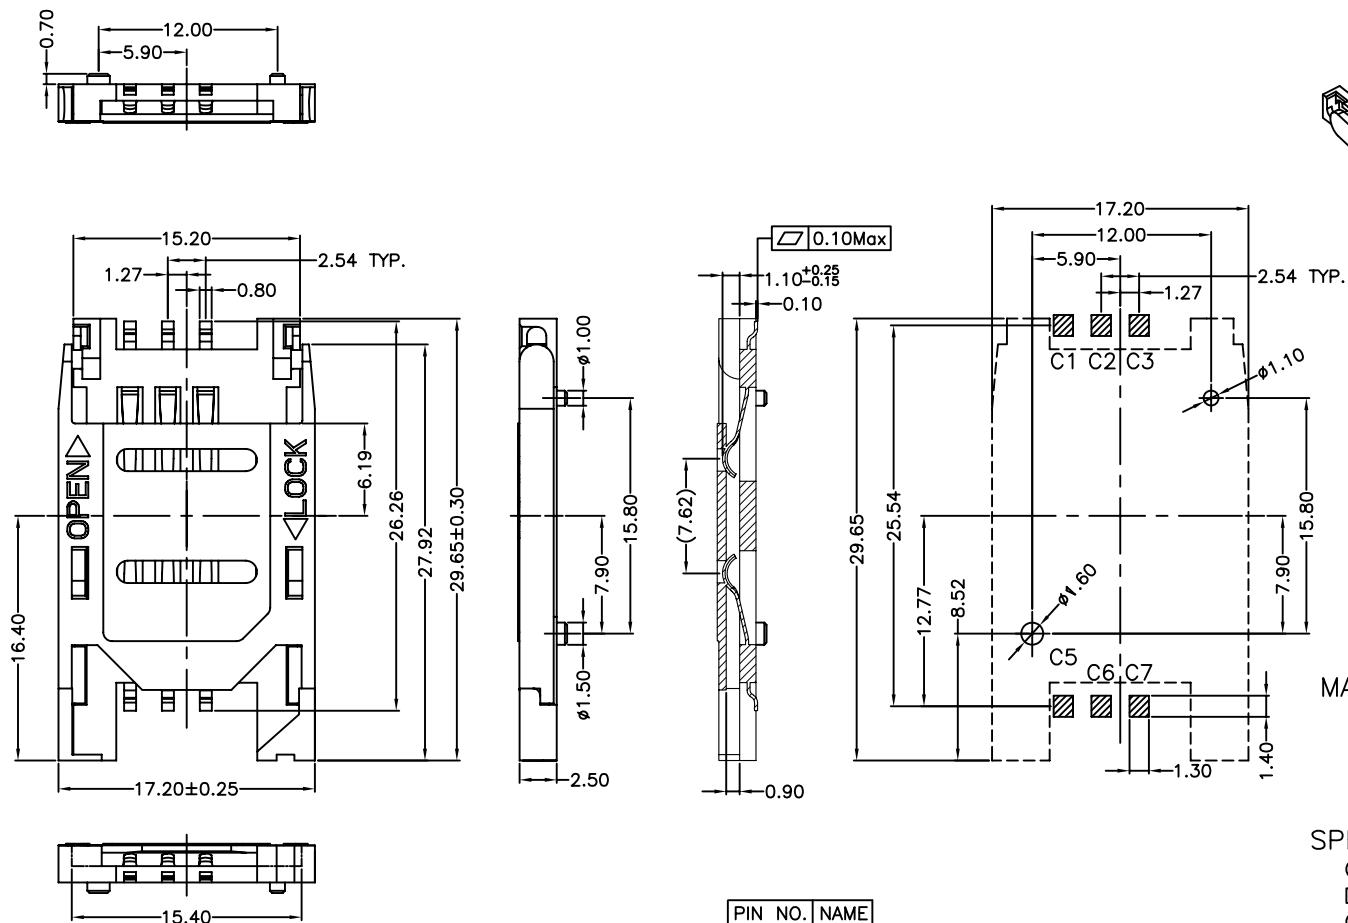

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
 TERMINAL: PHOSPHOR BRONZE, GOLD PLATED ON CONTACT
 AREA TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 0.5 AMP MAX
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -25°C~+85°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION





SCV-W2525PR-06-LF

SERIES
 90°SMT
 REEL
 POST
 BODY HIGH 2.5mm
 PAD TO PAD 25.54mm
 LEADFREE
 06WAY

DESCRIPTION: SIM CARD, 6PIN, PCB MOUNT, SMT, HINGE TYPE, WITH POST


Tape carrier packing information

Carrier Dimensions Diagram

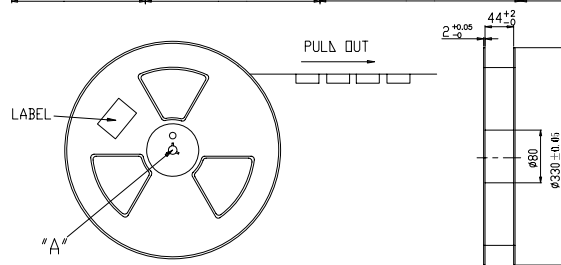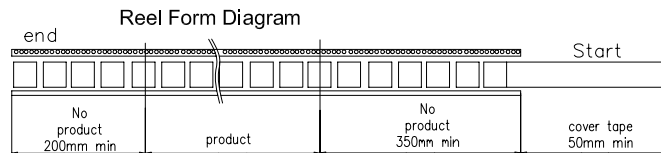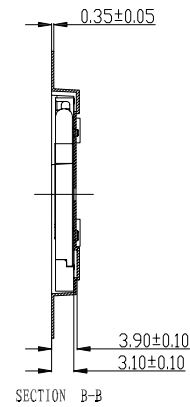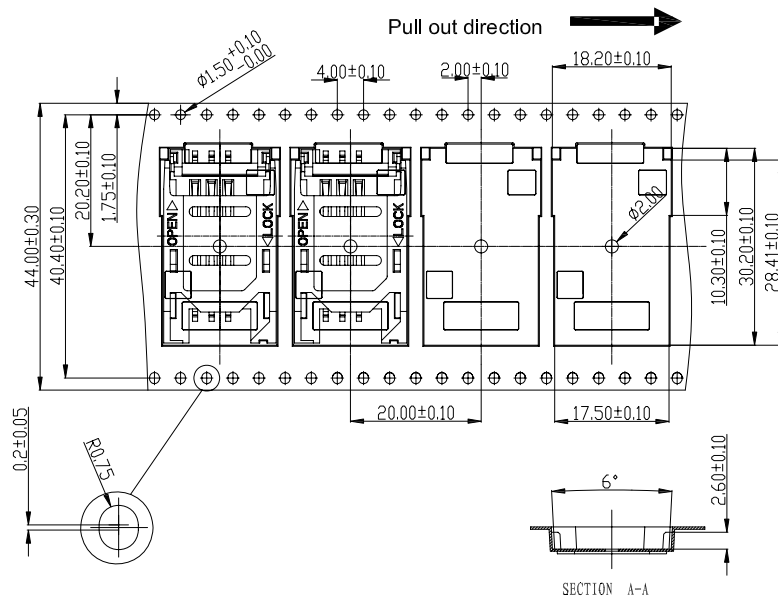

G.W.:1.37 KG

Q'ty:800 pcs/Reel

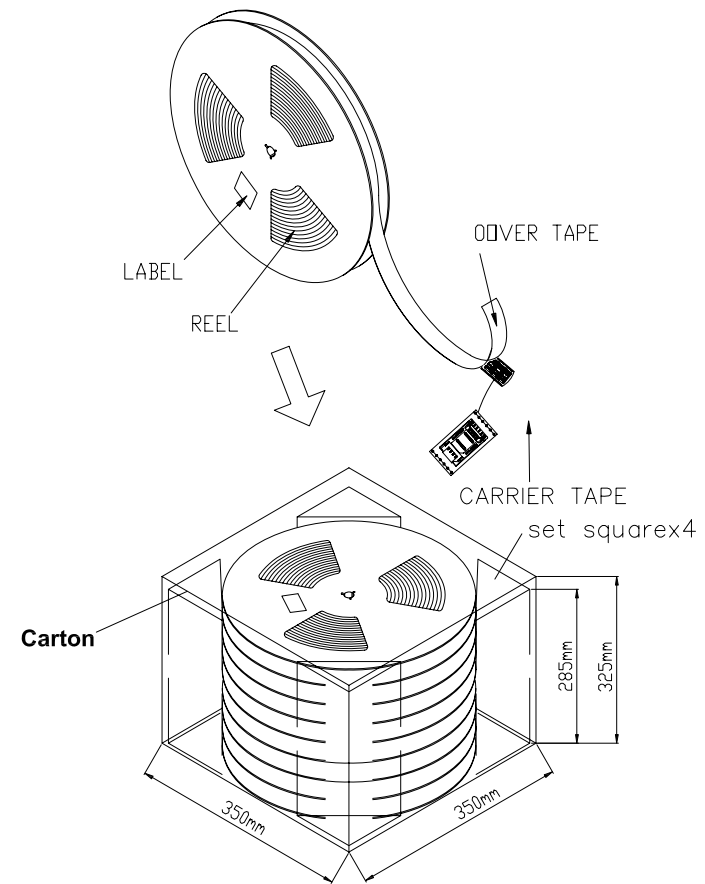

N.W.:4.85 KG

G.W.:9.59 KG

Q'ty: 4800 pcs per Carton (6 Reel set in order)

Meas: 35.00L×35.00W×31.50H cm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

SCV-W2525PR-06-LF

SERIES
90°SMT
LEADFREE
06WAY
REEL
POST
BODY HIGH 2.5mm
PAD TO PAD 25.54mm

DESCRIPTION:SIM CARD, 6PIN, PCB MOUNT, SMT, HINGE TYPE, WITH POST, PACKAGE