

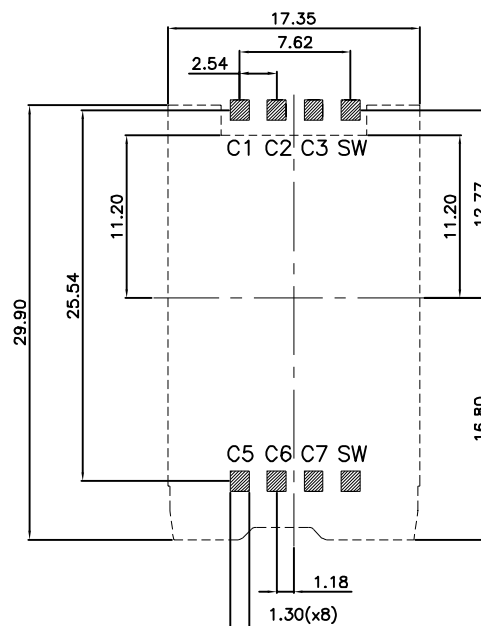
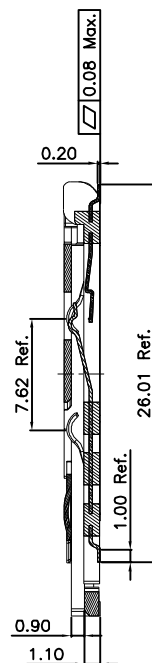


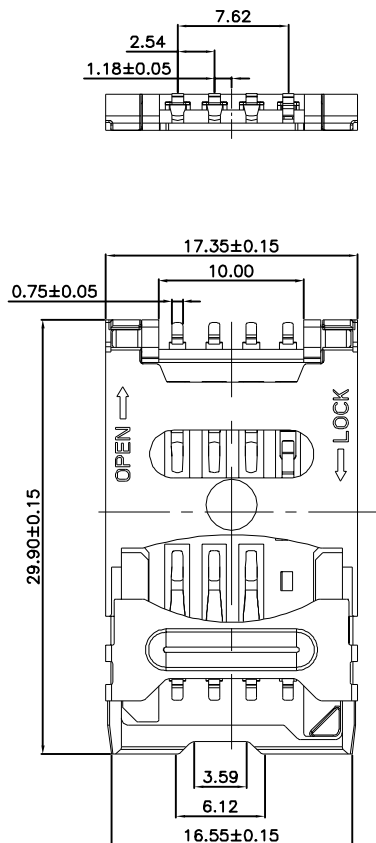

Recommended P.C.B Layout

Tolerance: ± 0.05 (Component Side)

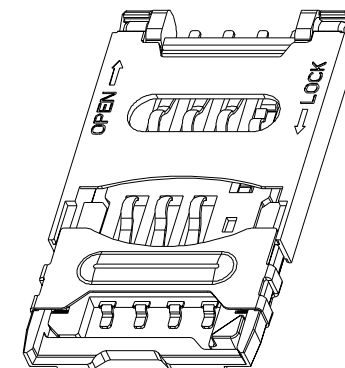


1. Materials:

Housing: Hi-Temp. Thermoplastic, UL 94V-0, Black
 Shell: Stainless Steel
 Terminal: Phosphor Bronze, Gold Plated On Contact Area.
 Tin Plated On Solder Tails.

2. Specification:

Current Rating: 0.5 Amp Max
 Dielectric Withstanding Voltage: 500V AC For One Minute
 Contact Resistance: 30m Ohms Max
 Insulation Resistance: 1000M Ohms Min At DC 500V
 Operation Temperature: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

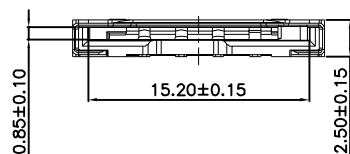

Electric Function	Detect Switch
Without Card	Open
Card Inserted	Close



Switch Operation Diagram

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
 .X $\pm$ 0.25
 .XX $\pm$ 0.20
 .XXX $\pm$ 0.10
 ANG $\pm$ 2°

PPOJECTION

照片框

ORDER INFORMATION

SCV-W2525XB-06-LF

SERIES
 90°SMT
 06WAY
 OPEN SWITCH
 NON POST
 BODY HIGH 2.5mm
 PAD TO PAD 25.54mm
 LEADFREE

DESCRIPTION: Sim Card, 6 Pin, PCB Mount, SMT, Metal Shield, Female, Hinge Type With Switch