


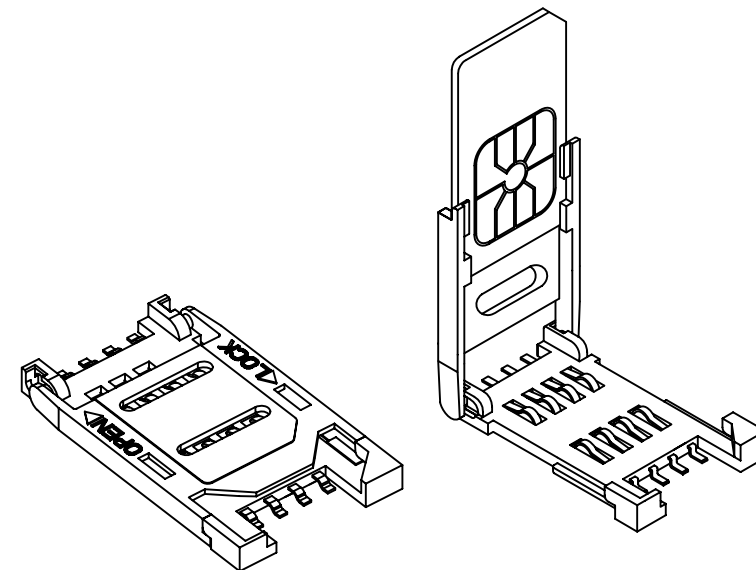

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
TERMINAL: PHOSPHOR BRONZE, GOLD PLATED ON CONTACT
AREA TIN PLATING ON SOLDER TAIL

CURRENT RATING: 0.5 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -25°C~+85°C

PIN NO.	NAME
C1	V _{cc}
C2	RST
C3	CLK
C4	RFU
C5	GND
C6	V _{pp}
C7	I/O
C8	RFU

照片框

SCV-W2525XR-08-LF

SERIES REEL LEADFREE

90°SMT 08WAY



NON POST

BODY HIGH 2.5mm


PAD TO PAD 25.54mm

DESCRIPTION: SIM CARD, 8PIN, PCB MOUNT, SMT, HINGE TYPE

TAPE REEL PACKAGE

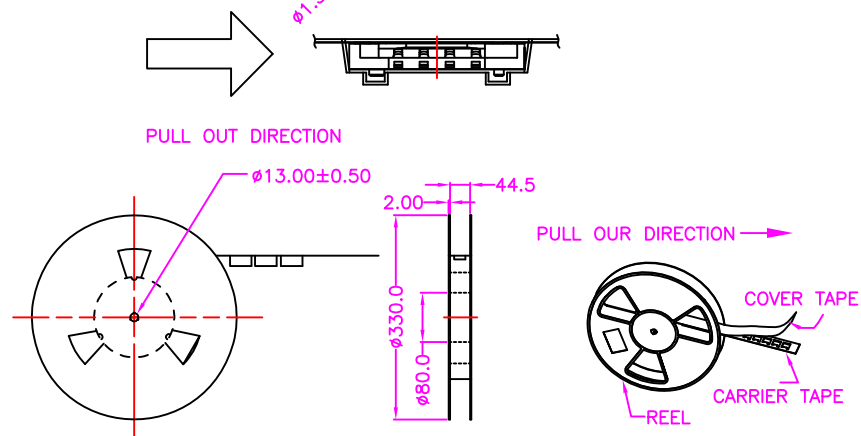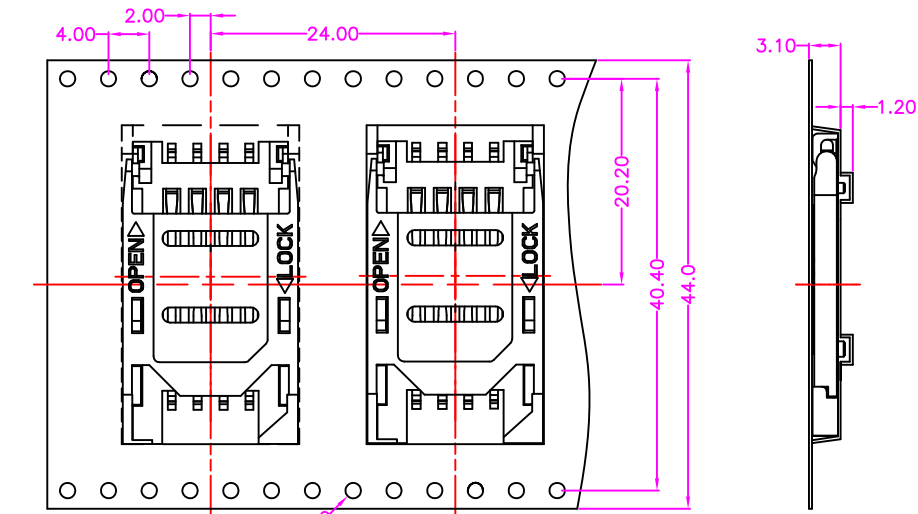

G.W.: 1.27 KGS
Q'TY: 800Pcs PER REEL

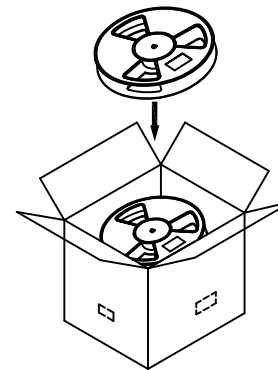

G.W.: 7.00 KGS
Q'TY: 4800Pcs PER CARTON (6 REELS SET IN ORDER)
MEANS: 35.00Lx35.00Wx31.50H cm

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

SCV-W2525XR-08-LF
SERIES REEL LEADFREE
90°SMT 08WAY
NON POST
BODY HIGH 2.5mm
PAD TO PAD 25.54mm

DESCRIPTION: SIM CARD, 8PIN, PCB MOUNT, SMT, HINGE TYPE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±