


P.C.B. LAYOUT  
TOP VIEW ±0.05

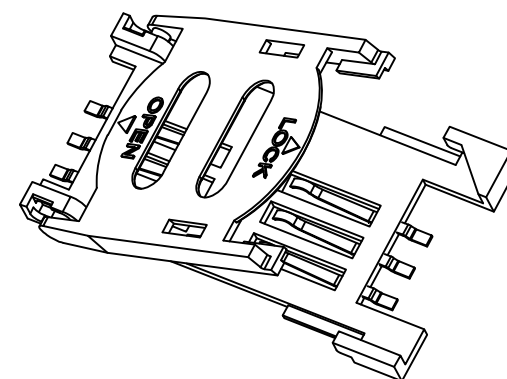

#### MATERIALS

HOUSING: LCP (UL 94V-0), BLACK  
 TERMINAL: COPPER ALLOY, GOLD PLATING ON CONTACT AREA  
 TIN PLATING ON SOLDER TAIL

#### SPECIFICATION

CURRENT RATING: 0.5 AMP MAX  
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE  
 CONTACT RESISTANCE: 100m OHMS MAX  
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V  
 OPERATION TEMPERATURE: -40°C~+85°C

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.40

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ± 0.10

ANG ±

煜倫股份有限公司

www.morethanall.com

SIZE A4

PJECTION

照片框

#### ORDER INFORMATION

SCV-W2623P-06-LF

SERIES | | | | LEADFREE  
 | | | | 06WAY  
 | | | | WITH LOCATING PEG  
 | | | | BODY HIGH 2.3mm  
 | | | | PAD TO PAD 26.0mm  
 90°SMT

DESCRIPTION: SIM CARD, PCB MOUNT, SMT, ALL PLASTIC, HINGE TYPE, 6 PIN, WITH POST FEMALE