


P.C.B. LAYOUT
TOP VIEW ±0.05

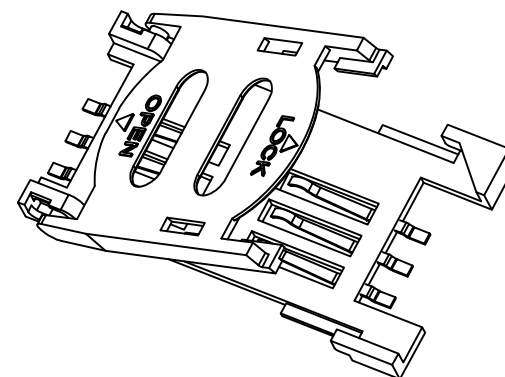

MATERIALS

HOUSING: LCP (UL 94V-0), BLACK
 TERMINAL: COPPER ALLOY, GOLD PLATING ON CONTACT AREA
 TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 0.5 AMP MAX
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 100m OHMS MAX
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -40°C~+85°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ± 0.40

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG ±

PJECTION

照片框

ORDER INFORMATION

SCV-W2623X-06-LF

SERIES | | | | LEADFREE
 | | | | 06WAY
 | | | | NON POST
 | | | | BODY HIGH 2.3mm
 | | | | PAD TO PAD 26.0mm
 90°SMT

DESCRIPTION: SIM CARD, PCB MOUNT, SMT, ALL PLASTIC, HINGE TYPE, 6 PIN, WITH POST FEMALE