
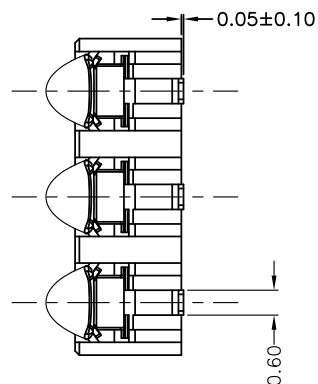



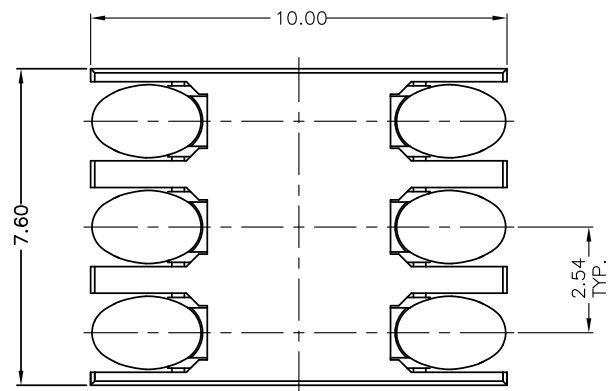


MATERIALS:

1. HOUSING : THERMOPLASTIC (UL94V-0), BLACK.
2. TERMINAL : COPPER ALLOY T=0.12mm
GOLD PLATED OVERALL.

RATING

1. CURRENT RATING : 0.5 A.
2. OPERATING VOLTAGE: 15 V.
3. OPERATING TEMPERATURE : -30°C TO +85°C.

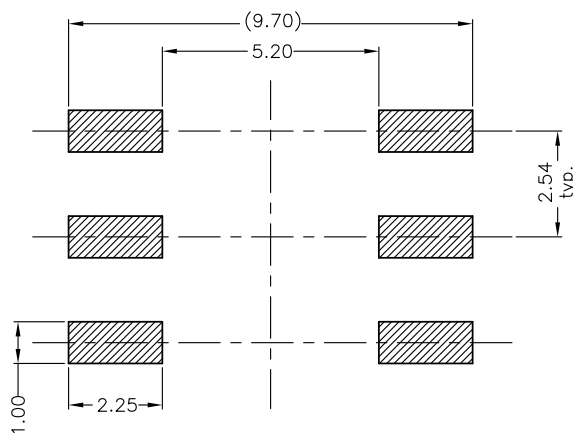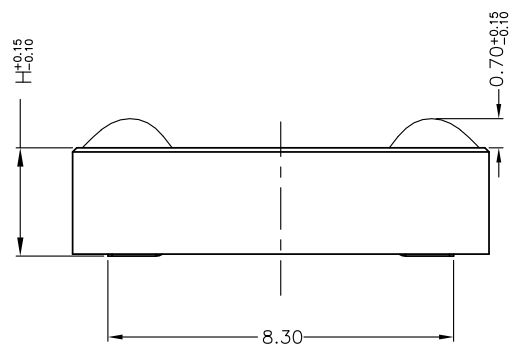

RECOMMEND P.C.B. LAYOUT
TOLERANCE ±0.05
TOP VIEW

3.0mm	SCX-W0730XR-06	2.2mm	SCX-W0722XR-06
2.8mm	SCX-W0728XR-06	2.0mm	SCX-W0720XR-06
2.6mm	SCX-W0726XR-06	1.8mm	SCX-W0718XR-06
2.4mm	SCX-W0724XR-06	1.6mm	SCX-W0716XR-06
DIM "H"	PART NUMBER	DIM "H"	PART NUMBER

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

SCX-W07xxXR-06-LF

SERIES

06WAY

LEADFREE

REEL


NON POST

90°SMT

16:HIGH 1.6mm

PAD TO PAD 7.45mm 30:HIGH 3.0mm

DESCRIPTION: SIM CARD 6P SMT TYPE

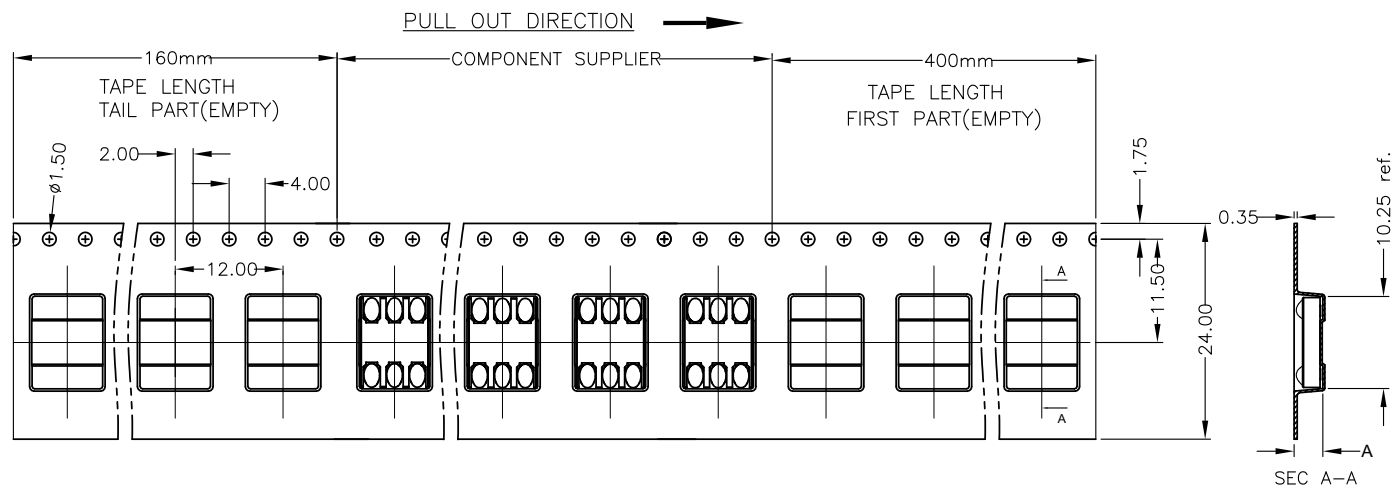


TAPE & REEL PACKAGE :

MATERIALS


1. CARRIER TAPE: POLYSTYREN (PS)
2. COVER TAPE: POLYSTYREN (PS)
3. REEL: POLYSTYREN (PS)

QUANTITY

A=3.2	1. 1500PCS PER REEL 2. 10 REEL PER CARTON(15000PCS PER CARTON)
A=3.9	1. 1200PCS PER REEL 2. 10 REEL PER CARTON(12000PCS PER CARTON)
A=4.3	1. 1100PCS PER REEL 2. 10 REEL PER CARTON(11000PCS PER CARTON)

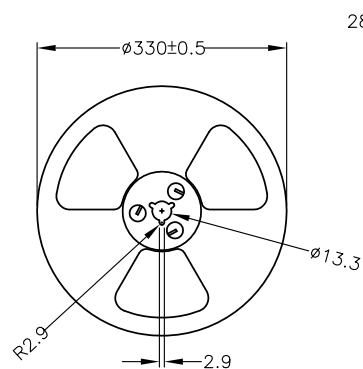

REEL FOR CARRIER TAPE

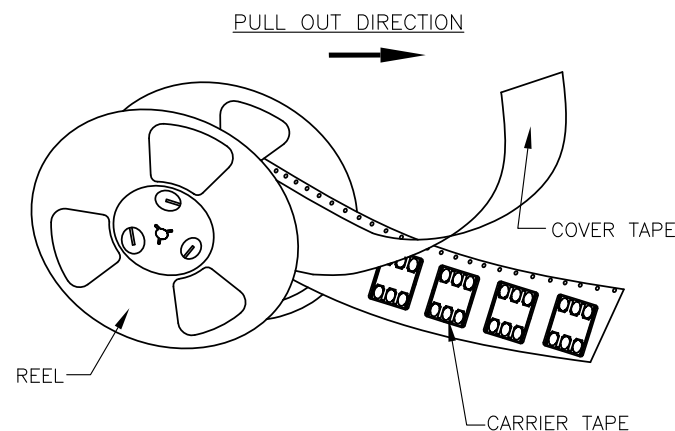

照片框

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ± 0.25
 .XX ± 0.15
 .XXX ± 0.05
 ANG ± 3°

ORDER INFORMATION

SCX-W07xxXR-06-LF

SERIES

06WAY

LEADFREE

REEL

NON POST

90°SMT

PAD TO PAD 7.45mm

16:HIGH 1.6mm

30:HIGH 3.0mm

DESCRIPTION: SIM CARD 6P SMT TYPE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com