
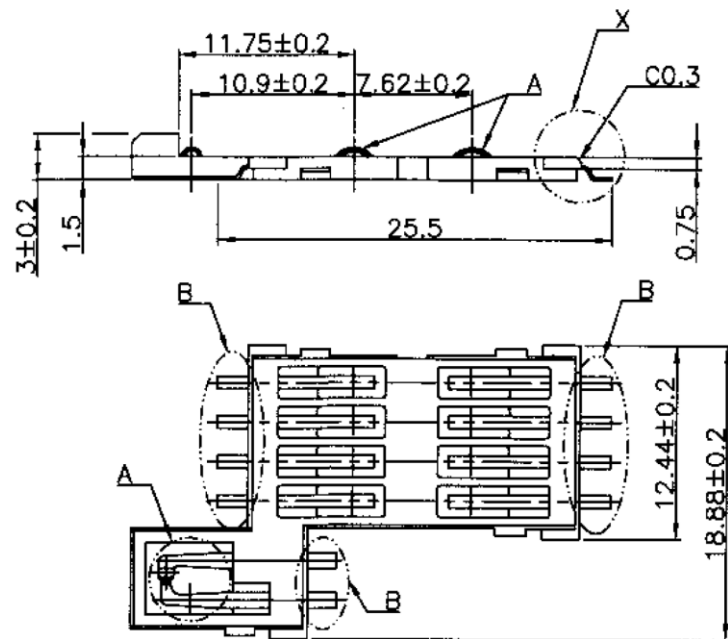
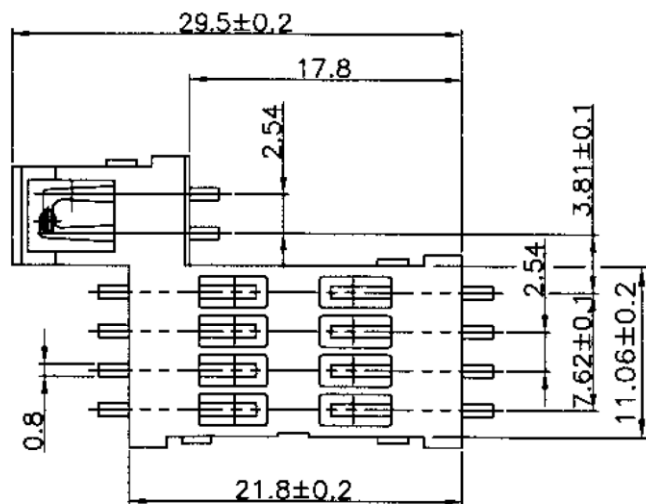


DETAIL X

- Material and Finish:
1. Insulator material: Nylon-9T, UL94V-0, Color: Black
 2. Contact Material: Phosphor Bronze
 3. Contact Plated: See Remark "A", "B"
 4. Switch Terminal Material: Phosphor Bronze
 5. Switch Terminal Plated: See Remark "A", "B"
 6. Current Rating: 0.5 Amp Max.
 7. Contact Resistance: 100 mohms Max.
 8. Insulation Resistance: 1000 Mohms Min.
 9. Dielectric Withstanding Voltage: 500V AC
 10. Operating Temperature: -40°C to +90°C
 11. Card Detection Switch (NORMAL OPEN)

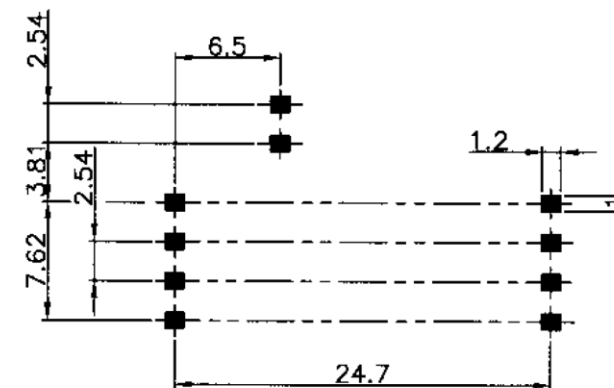

RECOMMENDED P.C.B. LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±
X, ± 0.30
.XX ± 0.20
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SCZ-W2415XB-08-LF
SERIES
90°SMT
LEADFREE
08WAY
OPEN SWITCH
NON POST
BODY HIGH 1.5mm
PAD TO PAD 24.6mm

DESCRIPTION: