



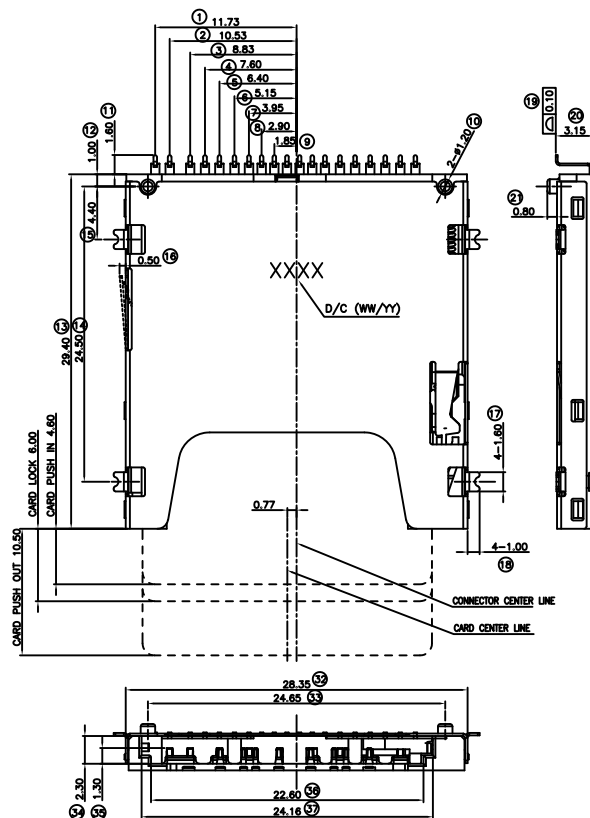


PIN DEFINE:

PIN#	NAME	DESCRIPTION	PIN#	NAME	DESCRIPTION
1	VSS3	GROUND	11	VDD1	SUPPLY VOLTAGE
2	DAT2	DATA LINE BIT2	12	D1-	DIFFERENTIAL DATE 1-
3	DO+	DIFFERENTIAL DATE 0+	13	CLK	CLOCK
4	CD/DAT3	CARD DETECT/DATA LINE BIT3	14	D1+	DIFFERENTIAL DATE 1+
5	DO-	DIFFERENTIAL DATE 0-	15	VSS2	SUPPLY VOLTAGE GROUND
6	CMD	COMMAND/RESPONSE	16	VSS5	GROUND
7	CD	CARD DETECT	17	DAT0	DATA LINE BIT0
8	VSS1	SUPPLY VOLTAGE GROUND	18	DAT1	DATA LINE BIT1
9	VSS4	GROUND	19	WP	WRITE PROTECT
10	VDD2	SUPPLY VOLTAGE(1.8V)			

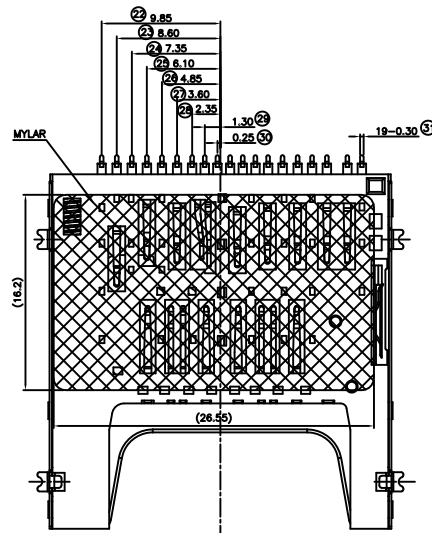


SPECIFICATION

- 1.Material:
Insulator: THERMOPLASTIC, rated UL94V-0,color:black.
Contacts: Phosphor Bronze,
Tin 100u"MIN at Solder Tail,
Selected Gold on Contact Area Plating.
Shell: Stainless.
Over Nickel Plating.
- 2.Electrical Characteristics:
Operating voltage : 500V(AC/DC).
Current rating : 1.0 A.
Operating Temperature: -20°C~+60°C.
Insulation resistance: 1000M ohms min. at 250VDC
Dielectric withstanding voltage:500 VAC/1minute.
Contact resistance: 100m ohms max.
Mating cycle: 10000 cycles, spring is not breaking.

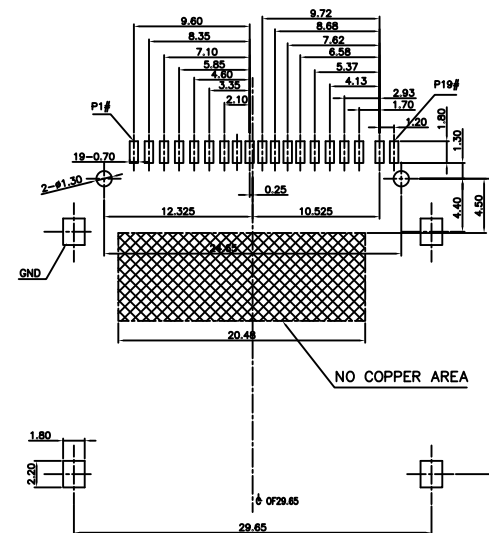

RECOMMENDER PCB LAYOUT
TOLERANCE UNLESS OTHERWISE IS ± 0.05



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.50
.X ± 0.30
.XX ± 0.20
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

SDC40-W24PA40C-19-LF
SERIES T T T T T LEADFREE
19 WAY
MYLAR
EAR/POST 4.40mm
UPPER CONTACT
PUSH PUSH

DESCRIPTION: SD 4.0 CARD PUSH CONN.(板)