
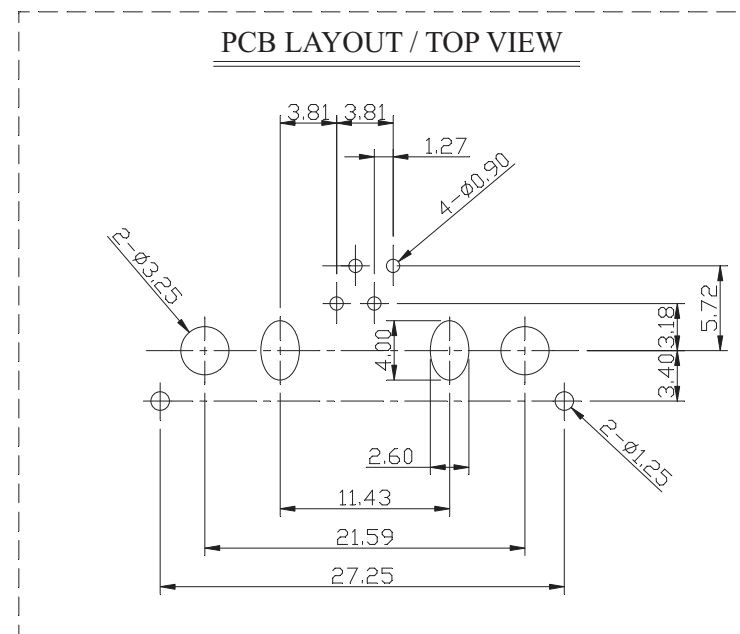
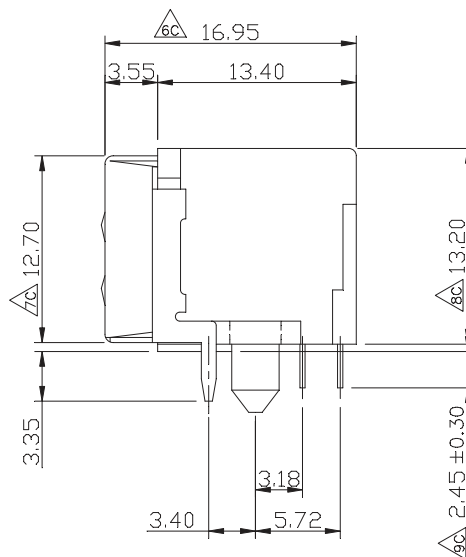
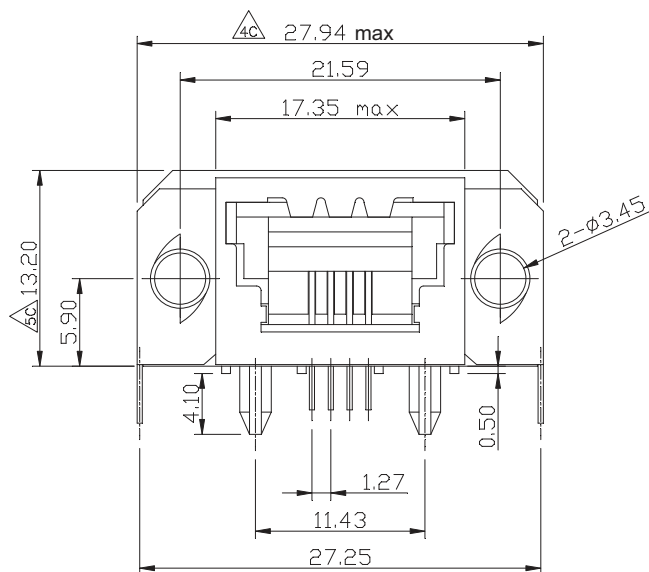


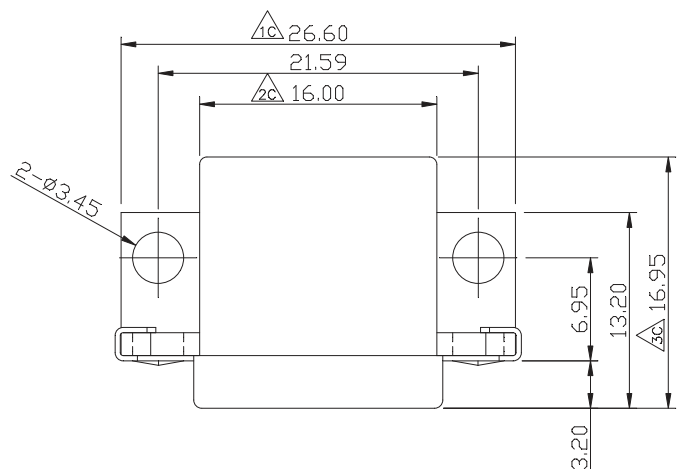

Materials:

Housing: Standard Material Glass Filled Polyester UL 94V-0 Standard Colour (Black)

Insert: Standard Material Glass Filled Polyester UL 94V-0 Standard Colour (Black)

Shielded: Brass with Bright-Tin

Contact: 0.35mm Thickness Phos-Bronze, Gold Plating Over Nickel in Contact Area,

Tin Plating Over Nickel in Solder Area

Gold Plating: Selective Gold Plating

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50


.X ± 0.38

.XX ± 0.25

.XXX ± 0.10

ANG ±

PPOJECTION



ORDER INFORMATION

SDL-JR06-0404-LF
SERIES | 06u" | 4P4C | LEADFREE
DIP 90°
JACK

DESCRIPTION: